



NOTES (UNLESS OTHERWISE SPECIFIED):

- 1 RECOMMENDED MOUNTING:
#6-32 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
- 2 RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
- 3 ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED
FROM THE REFERENCE LINE.
- 4 FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.

CHARACTERISTICS	
ELECTRICAL RATING	20A 250VAC (cULus) T55°C
TERMINAL	SCREW
OPER. FORCE MAX.	650 GMS
RELEASE FORCE MIN.	200 GMS
PRETRAVEL MAX.	.028 [0.7 mm]
OVERTRAVEL MIN.	.217 [5.5 mm]
MOVE. DIFF. MAX.	.008 [0.2 mm]
OPERATING POSITION	.826 TO .890 [21.0 TO 22.6 mm]

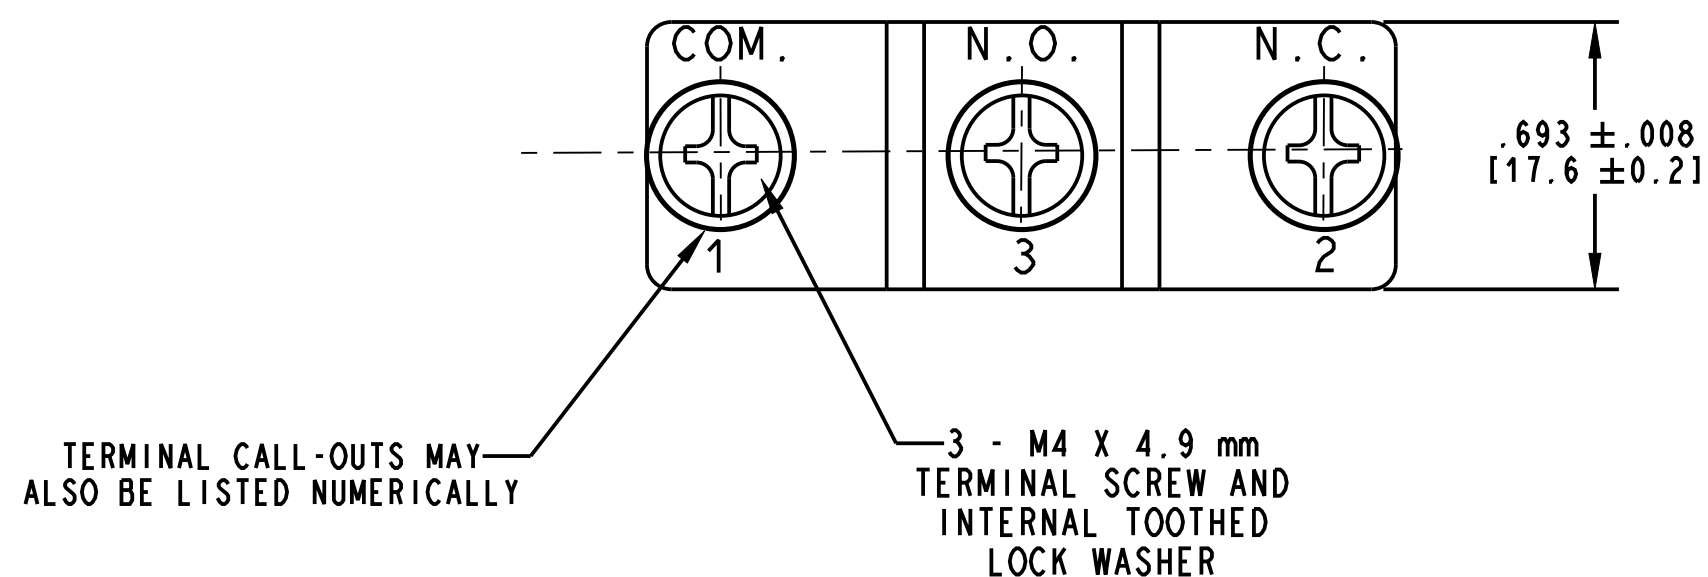

DWN: TLM/JED
APVD: SG
DATE: 21-JUN-04
THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

F	Z000374396	2016-08-08	GP	EL	PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES	C	ITEM NO.	GPTBNH11
REV	ECO NO.	DATE	PREP	APVD	4000000138	INCHES	± 0.02	± 0.015	± 5 °	SCALE:	N.T.S.	SH 1 OF 1