

11 10 9 8 7 6 5 4 3 2 1

K

J

H

G

F

E

D

C

B

A

K

J

H

G

F



E

D

C


B

A

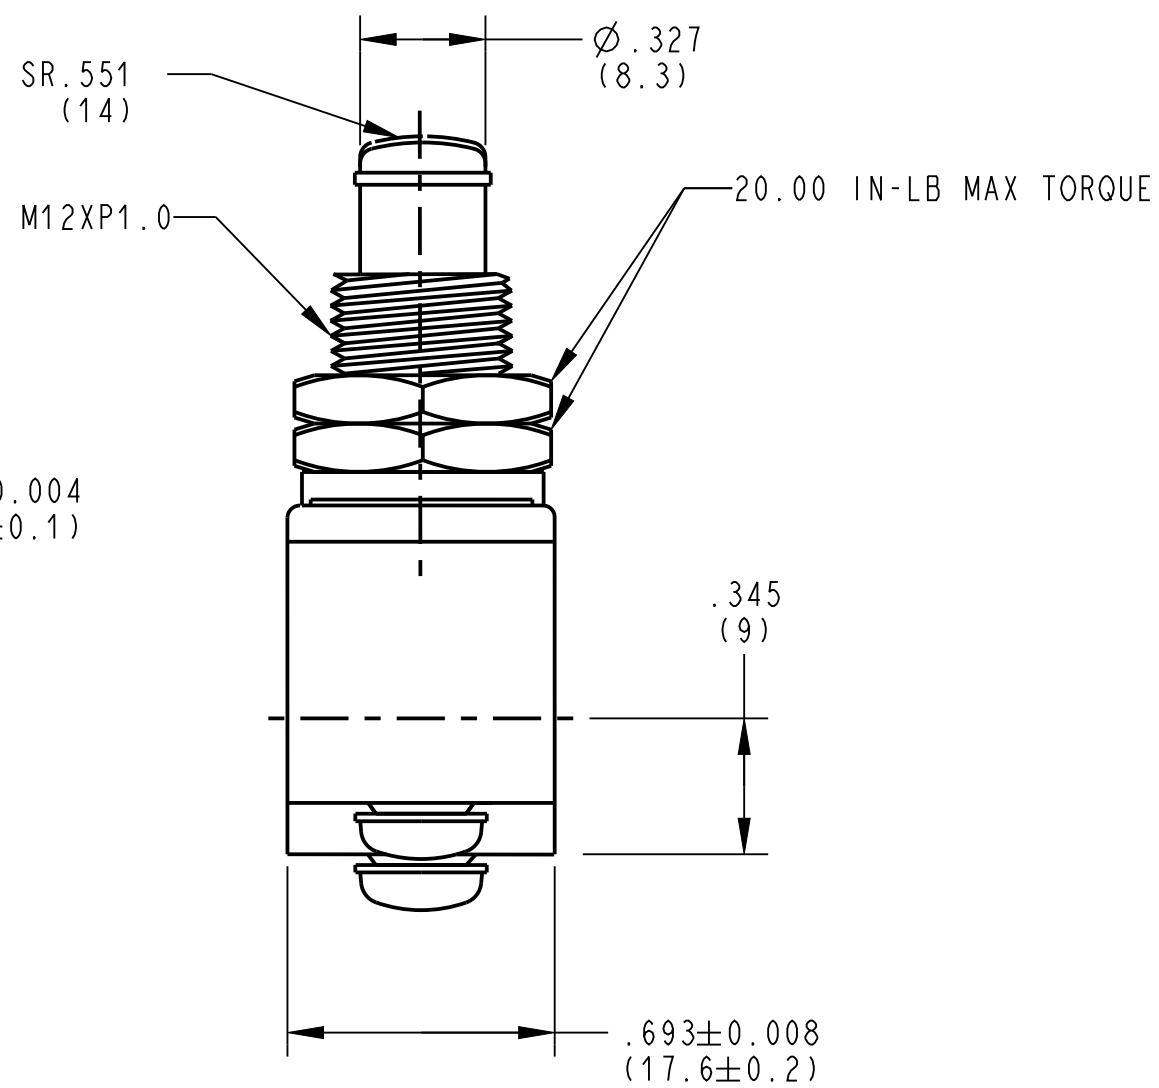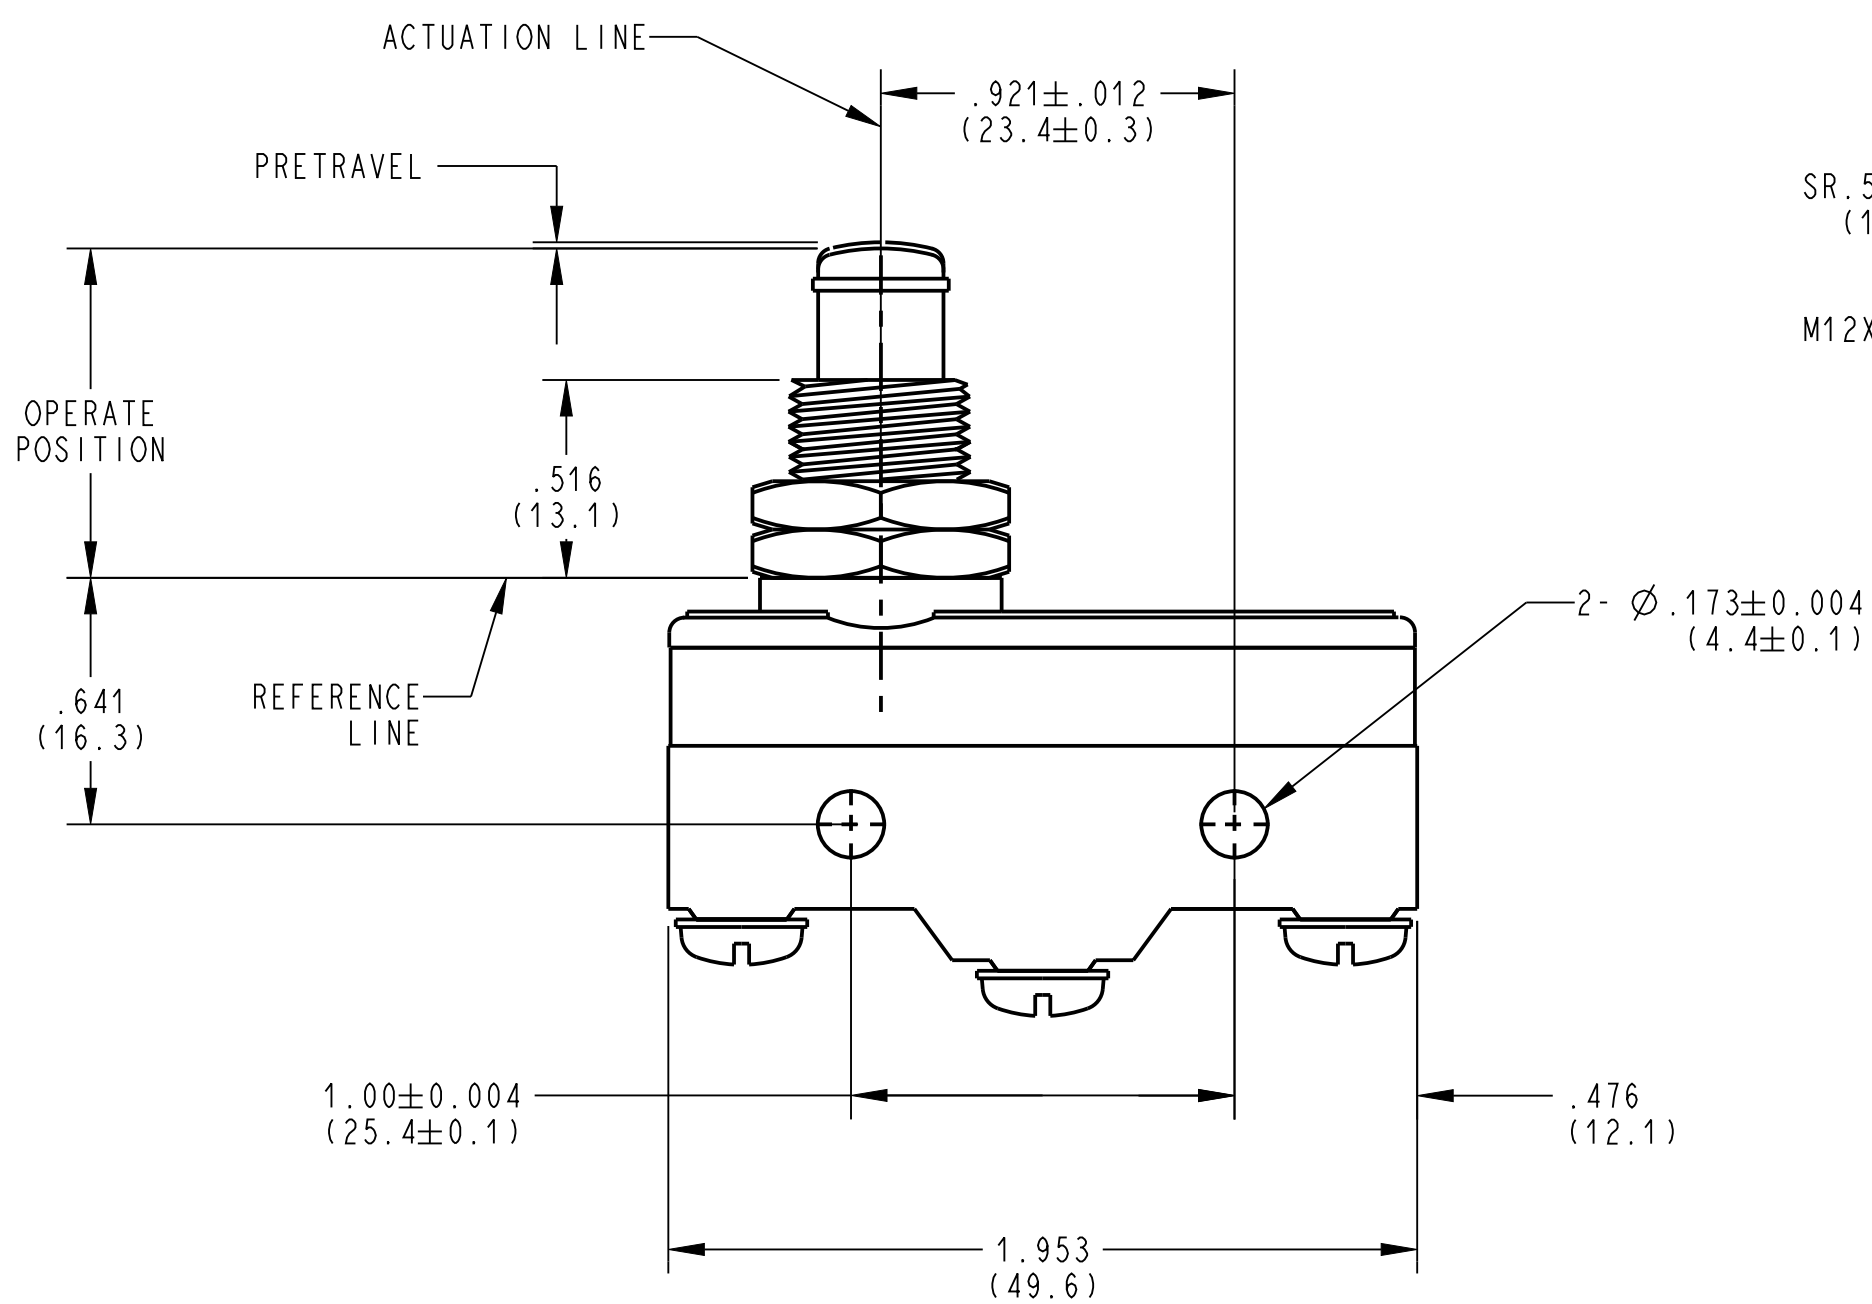

NOTES: (UNLESS OTHERWISE SPECIFIED)


1. RECOMMENDED MOUNTING:
M4 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER
THE COMPONENT RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.
3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE
AND MEASURED FROM THE REFERENCE LINE.
4. FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.

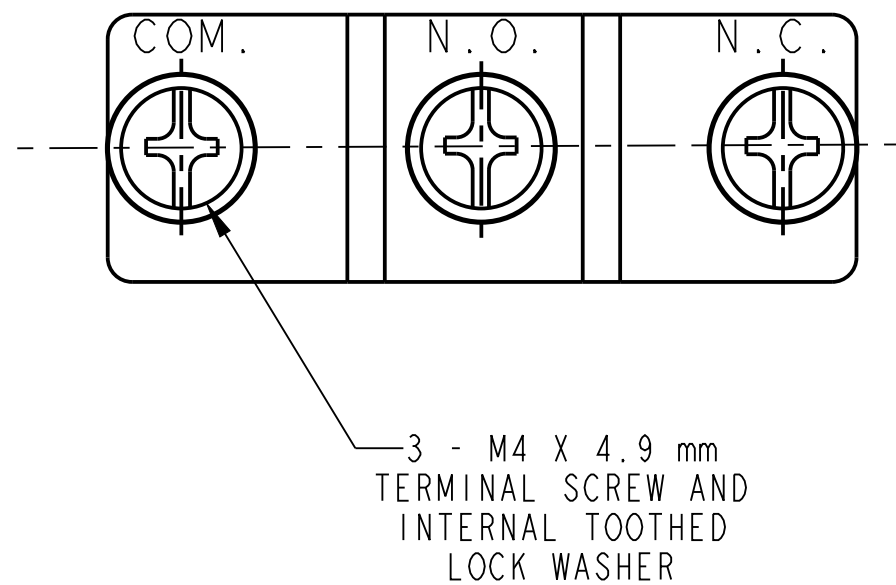

CHARACTERISTICS

ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE) -5T40
TERMINAL	SCREW
OPER. FORCE MAX.	350 GMS
RELEASE FORCE MIN.	114 GMS
PRETRAVEL MAX.	.016 [0.4 mm]
OVERTRAVEL MIN.	.216 [5.5 mm]
MOVE. DIFF. MAX.	.002 [0.05 mm]
OPERATING POSITION	.826 TO .890 [21.0 TO 22.6 mm]

DWN: JED
APVD: SB
DATE: 25-May-04
THIRD ANGLE PROJECTION



PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SWITCH

D	Z000360145	20-Apr-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
4000000138	INCHES	± 0.02	± 0.015	± 5 °

C	ITEM NO.	GPTCNH01
SCALE:	N.T.S.	SH 1 OF 1

11 10 9 8 7 6 5 4 3 2 1

ORIGINAL ON PROJE