
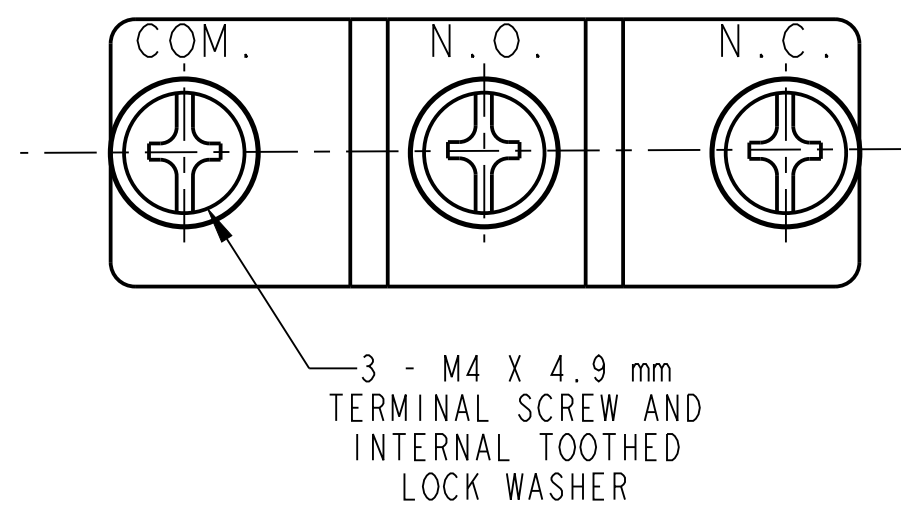
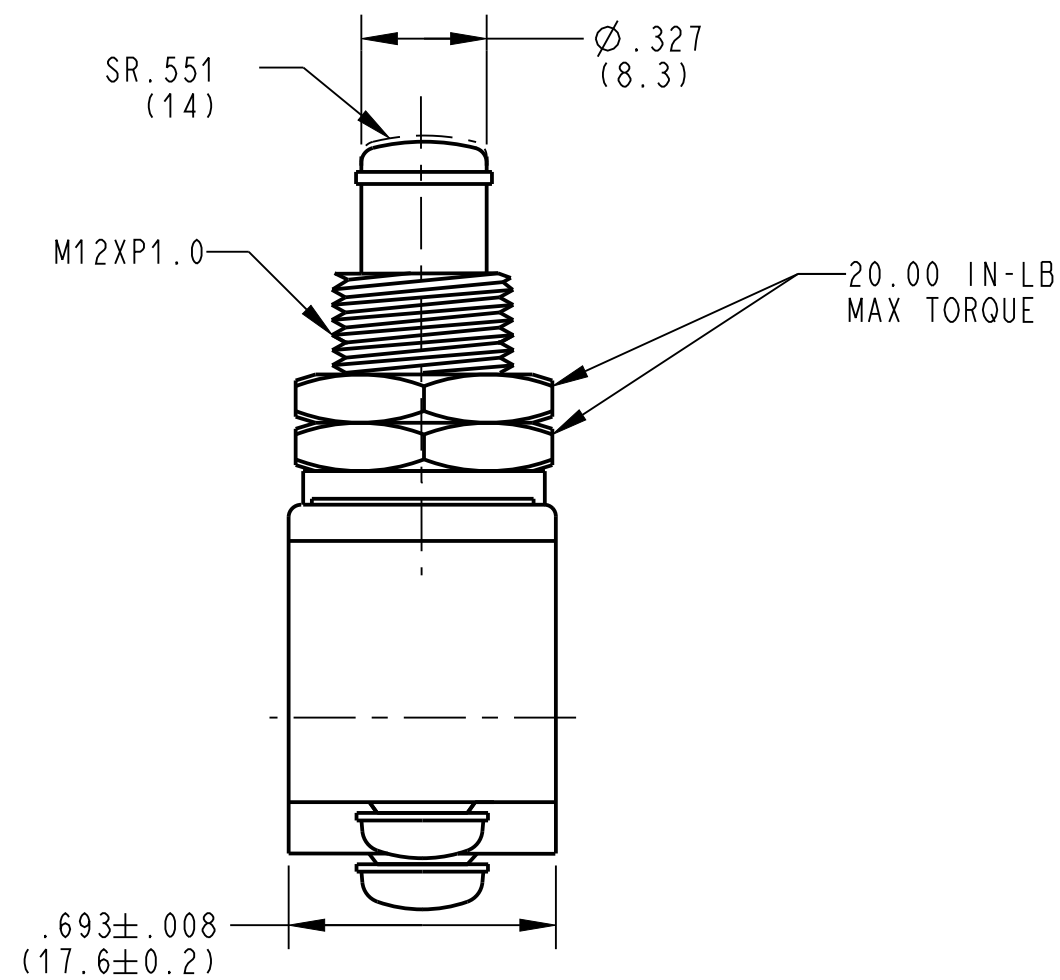


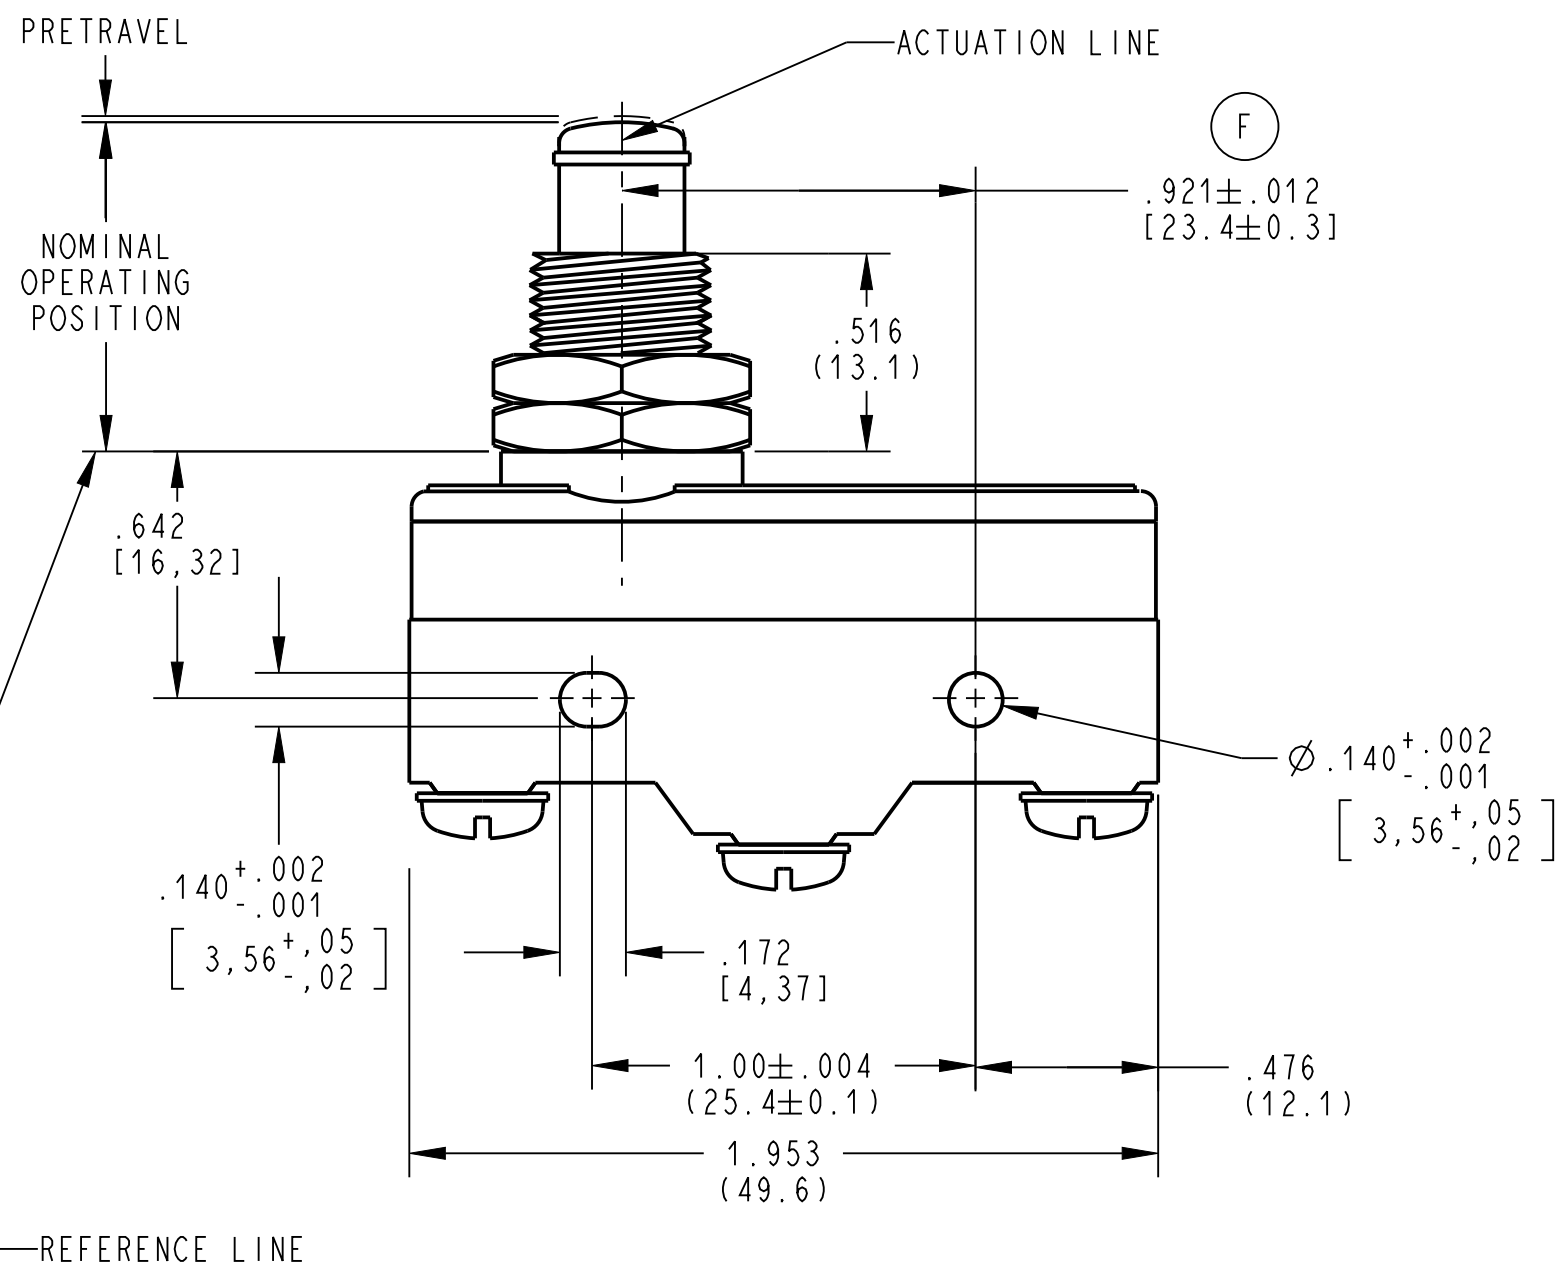


NOTES (UNLESS OTHERWISE SPECIFIED):

1. RECOMMENDED MOUNTING: #6-32 FASTENER WITH 6.00 IN-LB (7.00 KGF-CM) OF TORQUE MAXIMUM.
2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
4. FOR MARKING AND NAMING SPECIFICATION SEE ES021295.

CHARACTERISTICS	
ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE)-5T40
TERMINAL	SCREW
OPER. FORCE MAX.	349 GMS
RELEASE FORCE MIN.	114 GMS
PRETRAVEL MAX.	.016 [0.41 mm]
OVERTRAVEL MIN.	.217 [5.51 mm]
MOVE. DIFF. MAX.	.002 [0.05 mm]
OPERATING POSITION	.826 TO .890 [20.98 TO 22.60 mm]

DWN: TLM/JED
APVD: SG
DATE: 21-JUL-04
THIRD ANGLE PROJECTION



TOLERANCE UNLESS SPECIFIED
DWG UNITS X.XX X.XXX ANGLES



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME / DESCRIPTION

SPEC DRAWING

C ITEM NO. GPTCNH11

SCALE: NOT TO SCALE SH 1 OF 1

F	Z000374396	2016-08-08	GP	EL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR
4000000138

INCH ± 0.02 ± 0.015 ± 5 °

ORIGINAL ON PROJE