



NOTES (UNLESS OTHERWISE SPECIFIED):

1. RECOMMENDED MOUNTING: #6-32 FASTENER WITH 6.00 IN-LB (7.00 KGF-CM) OF TORQUE MAXIMUM.
2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
4. FOR MARKING AND NAMING SPECIFICATION SEE ES021295.

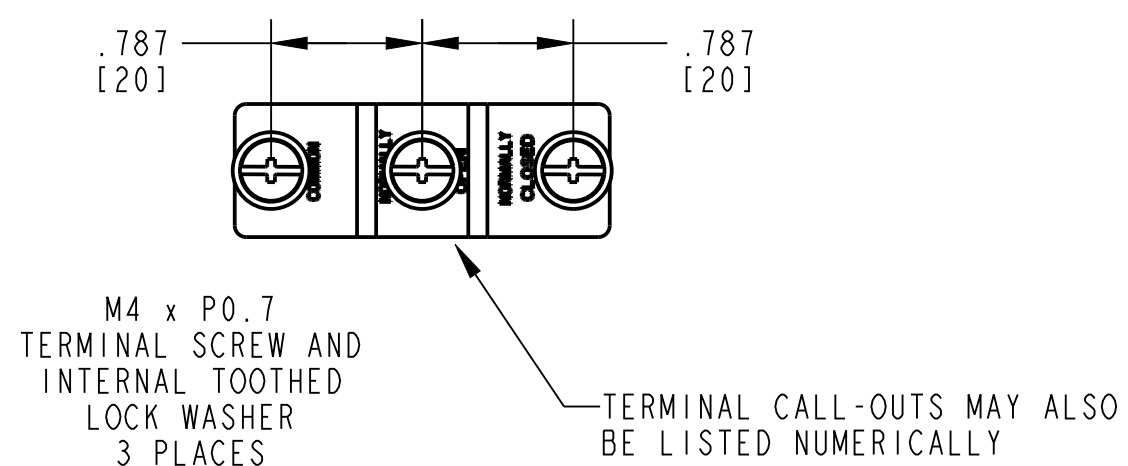

| CHARACTERISTICS | |
|----------------------|---------------------------------------------------|
| ELECTRICAL RATING | 15A 250VAC T55°C (cULus) 15A 250VAC-5T40 (VDE) |
| TERMINAL | SCREW |
| OPERATING FORCE MAX. | 350 GRAMS |
| RELEASE FORCE MIN. | 114 GRAMS |
| PRETRAVEL MAX. | .016 (0.4mm) |
| OVERTRAVEL MIN. | .140 (3.58mm) |
| MOVE DIFF. MAX. | .002 (0.05mm) |
| OPERATING POSITION | 1.270 TOP 1.360 (32.2 TO 34.6) |

DWN: TLM
APVD: SG
DATE: 21-NOV-06
THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

| REV | ECO NO. | DATE | PREP | APVD | PROJECT/ CSR | DWG UNITS | X.XX | X.XXX | ANGLES | C | ITEM NO. | GPTCRH11 |
|-----|------------|------------|------|------|--------------|-----------|--------|---------|---------|--------|--------------|-----------|
| H | Z000360152 | 2016-04-21 | GP | EL | 4000000138 | INCH | ± 0.02 | ± 0.015 | ± 5.0 ° | SCALE: | NOT TO SCALE | SH 1 OF 1 |

ORIGINAL ON PROJE