

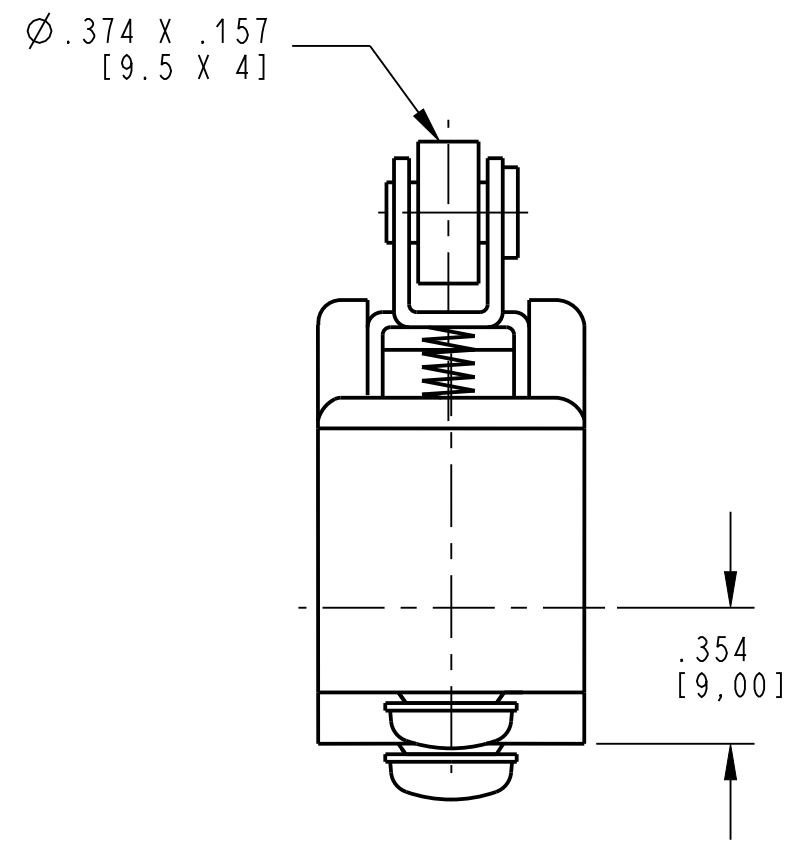
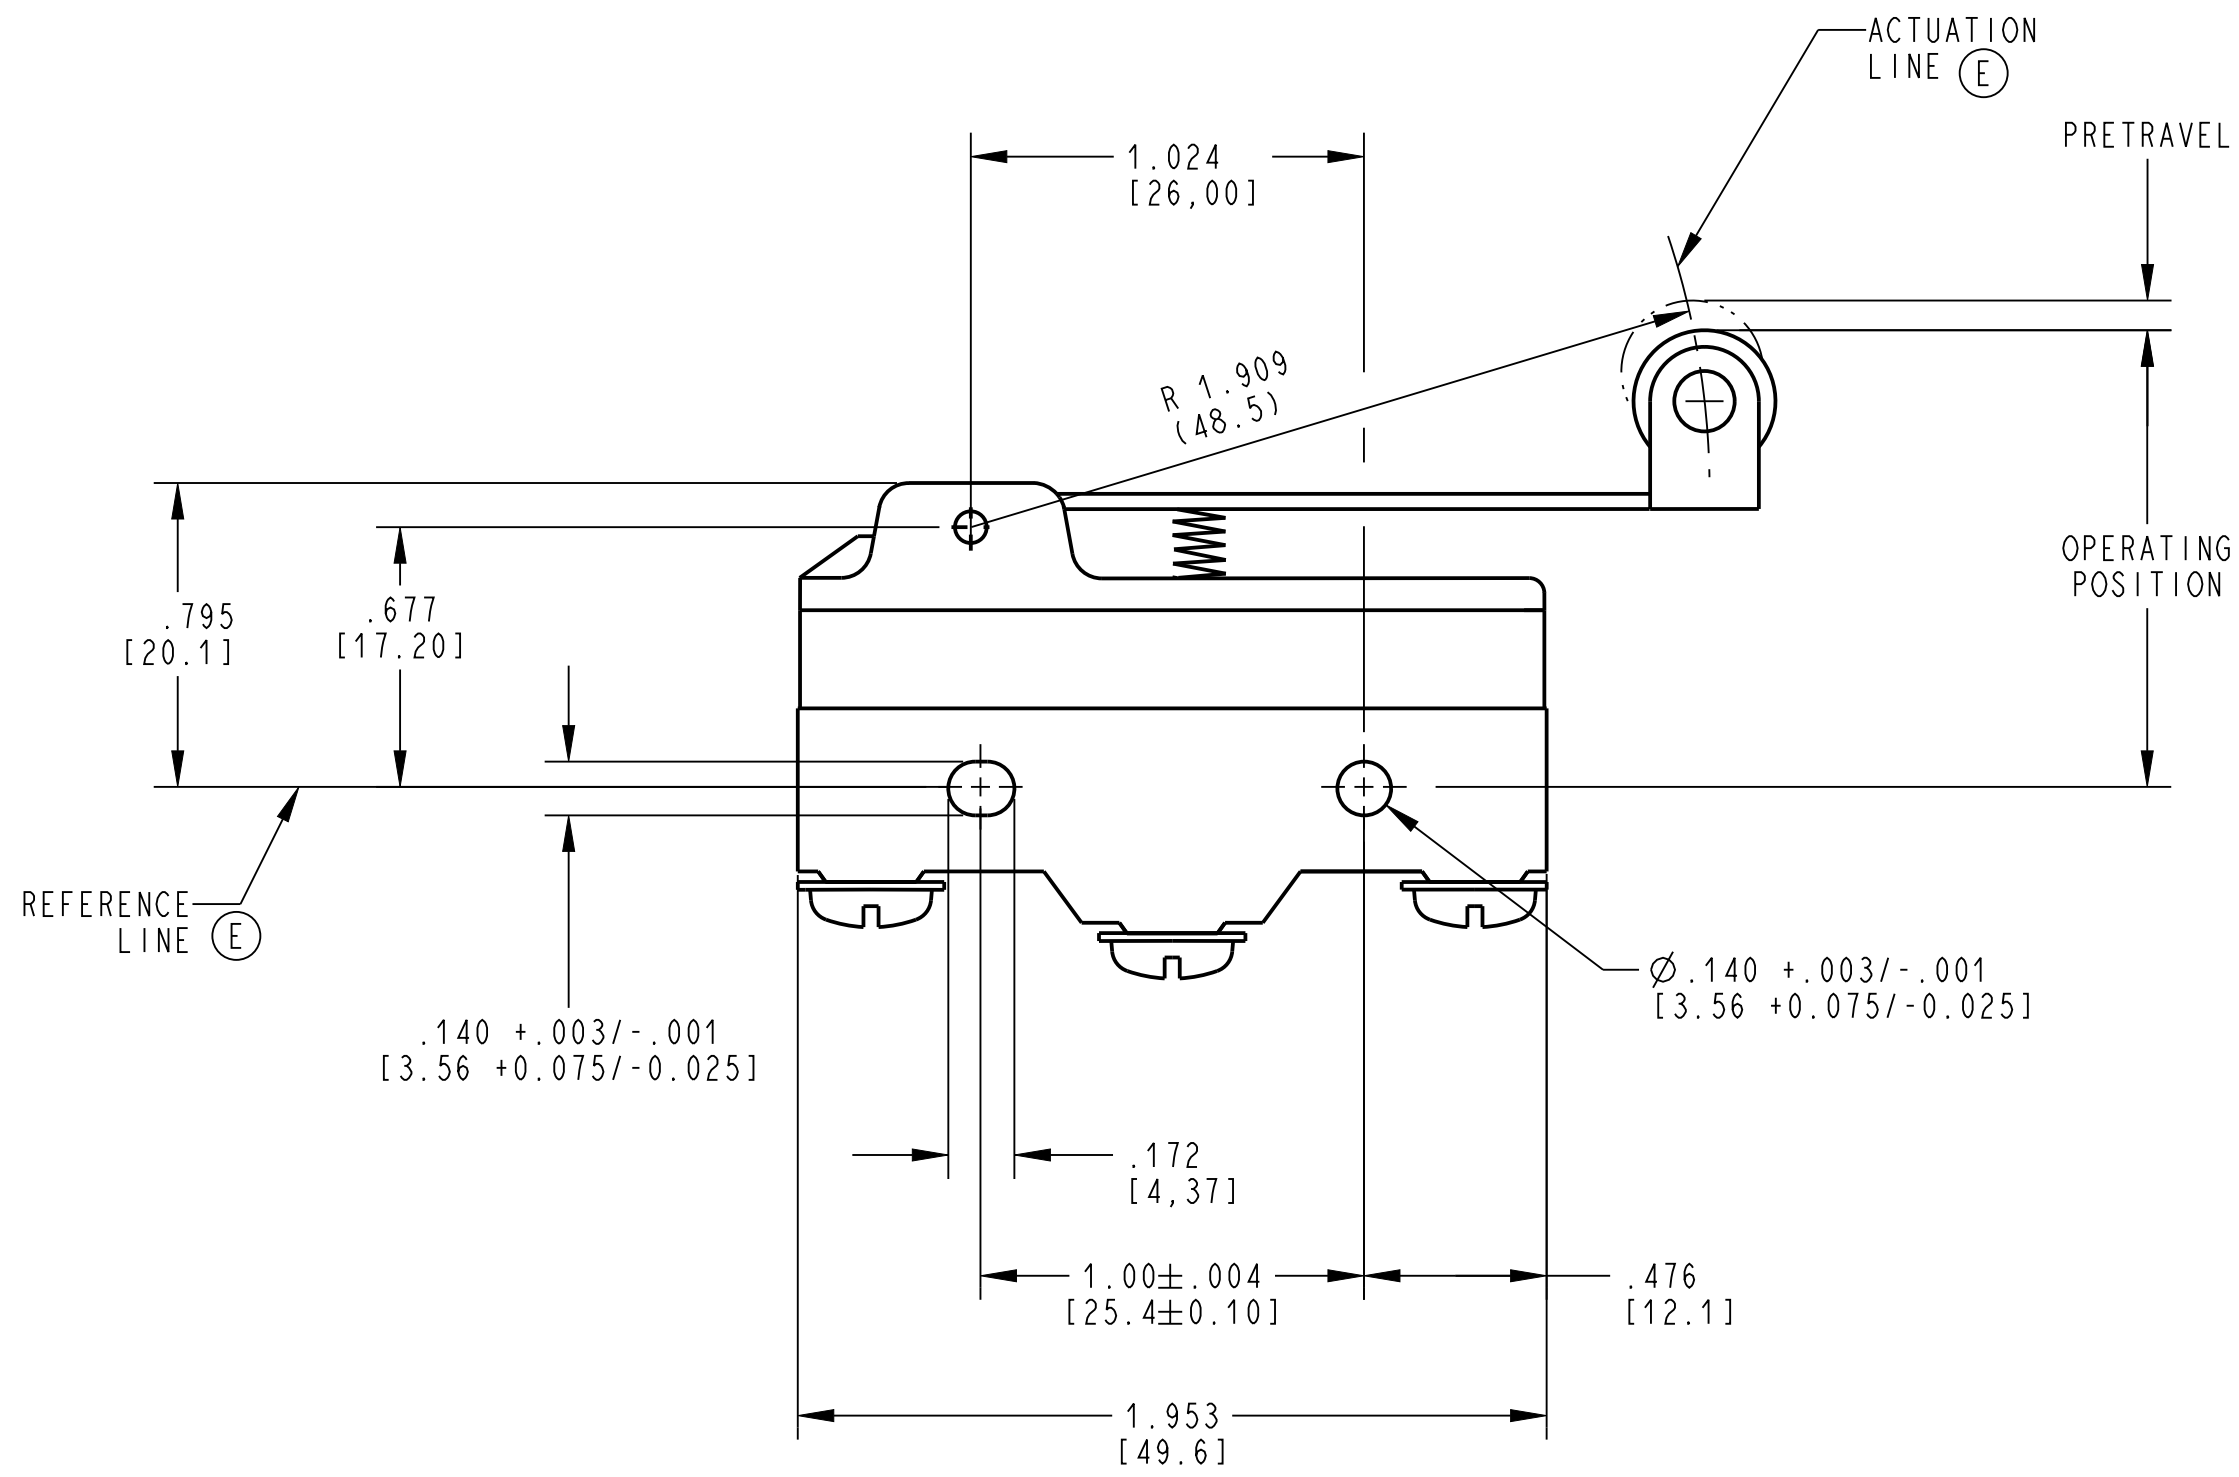


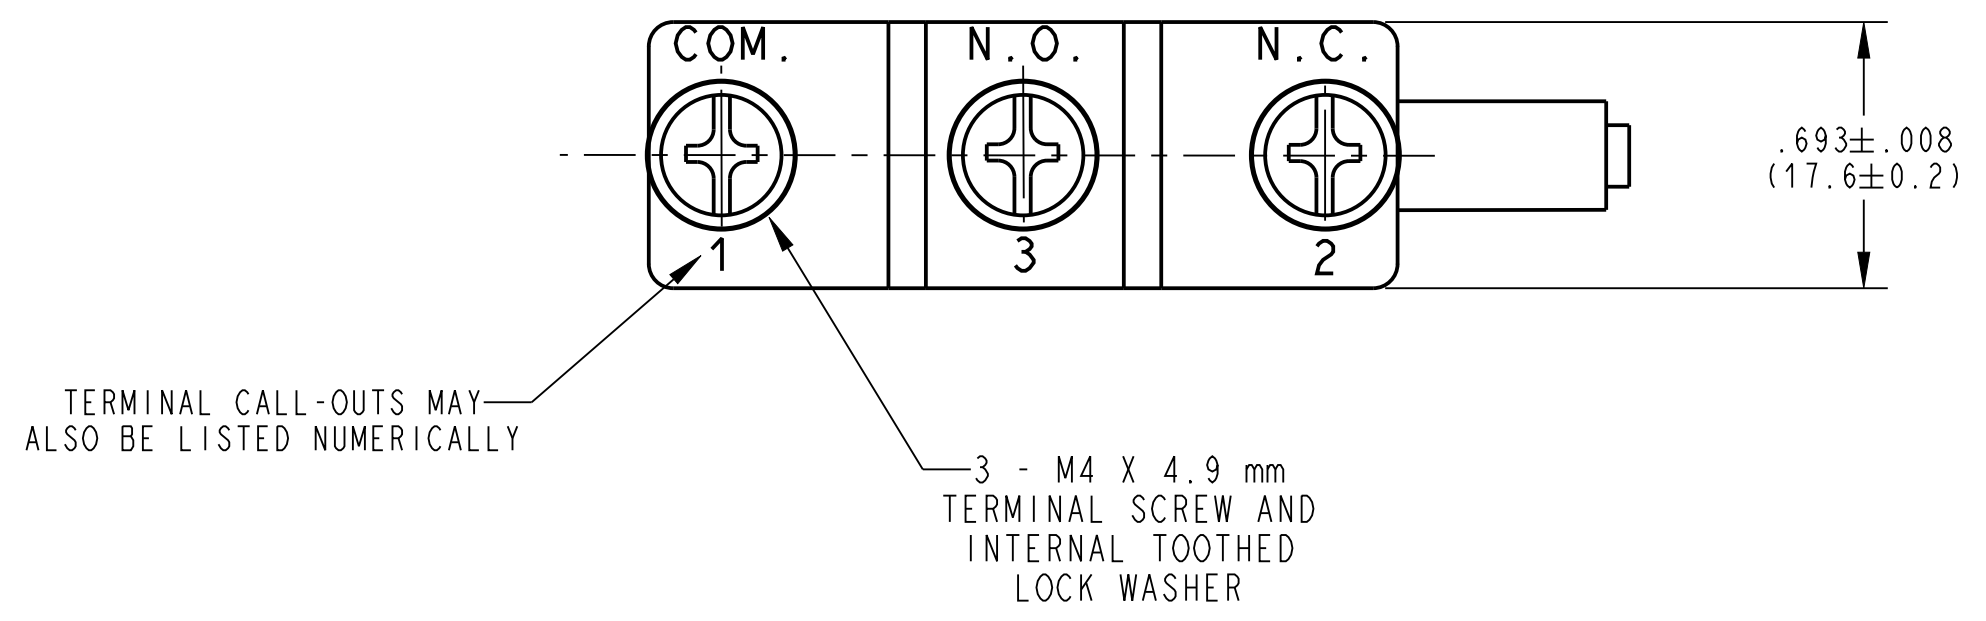

- NOTES (UNLESS OTHERWISE SPECIFIED): (E)
- 1 RECOMMENDED MOUNTING:
#6-32 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
 - 2 RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
 - 3 ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED
FROM THE REFERENCE LINE.
 - 4 FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.



CHARACTERISTICS	
ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE) -5T40
TERMINAL	SCREW
OPER. FORCE MAX.	100 GMS
RELEASE FORCE MIN.	22 GMS
PRETRAVEL MAX.	.280 [7.11 mm]
OVERTRAVEL MIN.	.158 [4.0 mm]
MOVE. DIFF. MAX.	.040 [1.02 mm]
OPERATING POSITION	1.157 TO 1.220 [29.4 TO 31.0 mm]

DWN: JED		 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION	
APVD: SG			
DATE: 28-FEB-05			
THIRD ANGLE PROJECTION		SPEC DRAWING	
		TOLERANCE UNLESS SPECIFIED DWG UNITS X.XX X.XXX ANGLES INCHES ± .02 ± .015 ± 5 °	
PROJECT/ CSR 4000000138		C ITEM NO. GPTCRS11 SCALE: 2:1 SH 1 OF 1	

E	Z000360155	2016-04-26	TLM	ELL
REV	ECO NO.	DATE	PREP	APVD

ORIGINAL ON PROJE (E)