

Sealed Rocker Switch



Single and Double Pole KG Series

Features

- Snap-in mounting
- RoHS compliant
- 100,000 cycles mechanical life
- IP56
- Switches up to 20 A

Standard Parts¹


North America and Europe

KGC2ANB1BBD KGC2BNB1BBB KGC2CNB1BBN KGC3ANB1BBD

¹The part number configuration matrix below provides details to the part numbers above.

For configurable part numbers that are not listed above, not listed in your region, or for custom part numbers, contact the factory or your distributor.

Part Number Breakdown

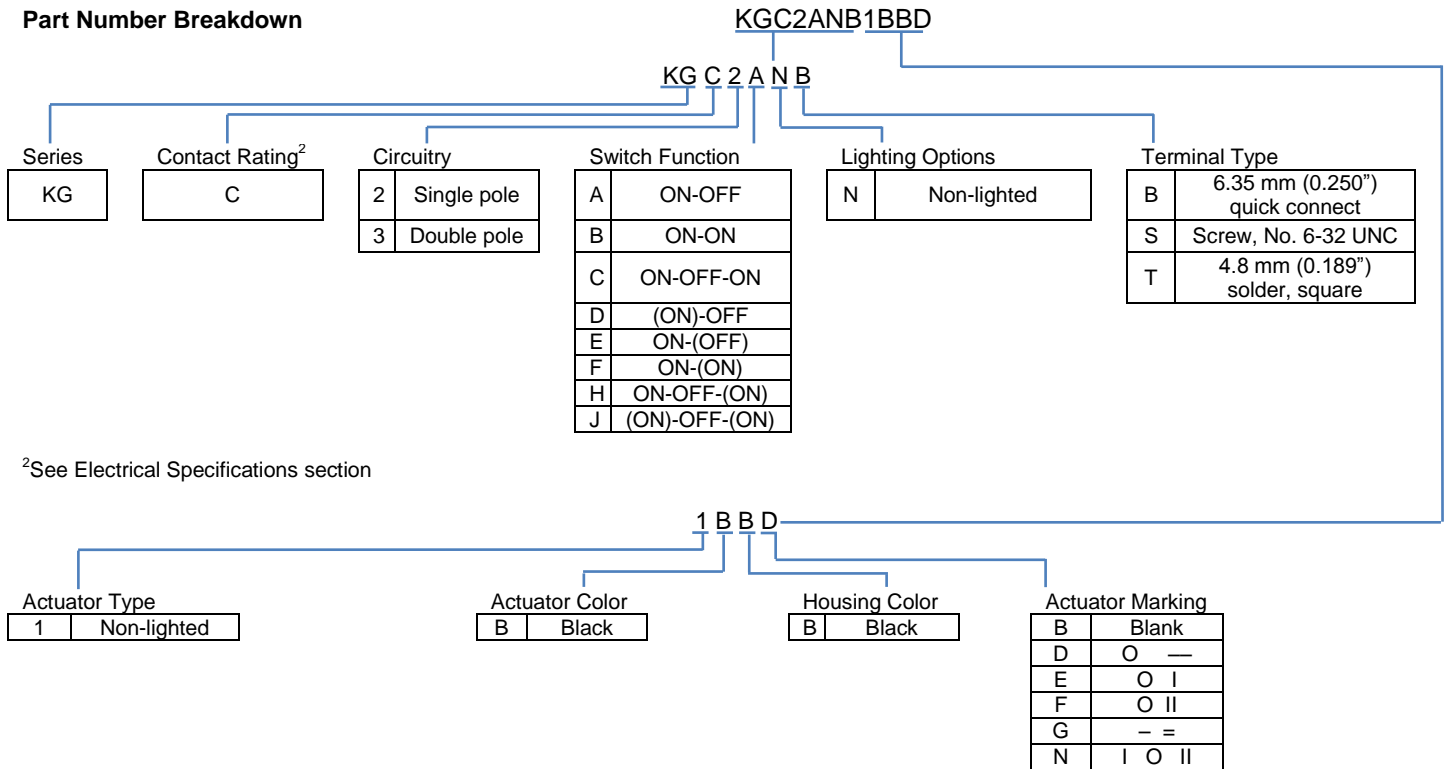

Electrical Specifications

Dielectric Strength	1500 VAC for 1 minute
Insulation Resistance	100 MΩ min at 500 VDC
Initial Contact Resistance	0.050 Ω max

Electrical Ratings:

UL1054:	VDC ³ :
20 A 125 VAC / 10 A 250 VAC	20 A 14 VDC

Electrical Life at Rated Load	UL:
Minimum Operations	6,000


³DC ratings not agency approved

UL File No: E23301

Material and Environmental Specifications

Actuator	Nylon 66 with 33% Glass Fiber
Housing	Nylon 66
Spring	Steel
Contacts	Silver Alloy
Movable Arm	Silver
Terminals	Silver-Plated Copper Alloy
Rubber Boot	Silicone
Operating Temperature Range	-25 °C to +85 °C (-13 °F to +185 °F)
Ingress Protection	IP56

Circuitry and Switch Functions

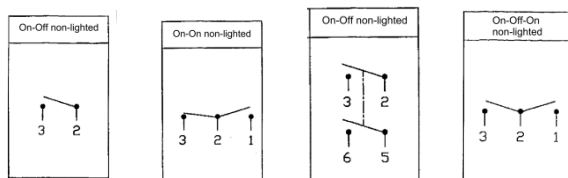

Dimensions mm (inches)

