
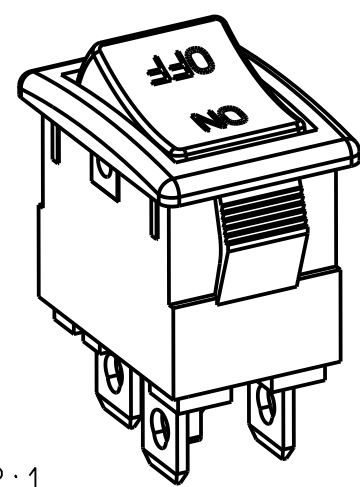


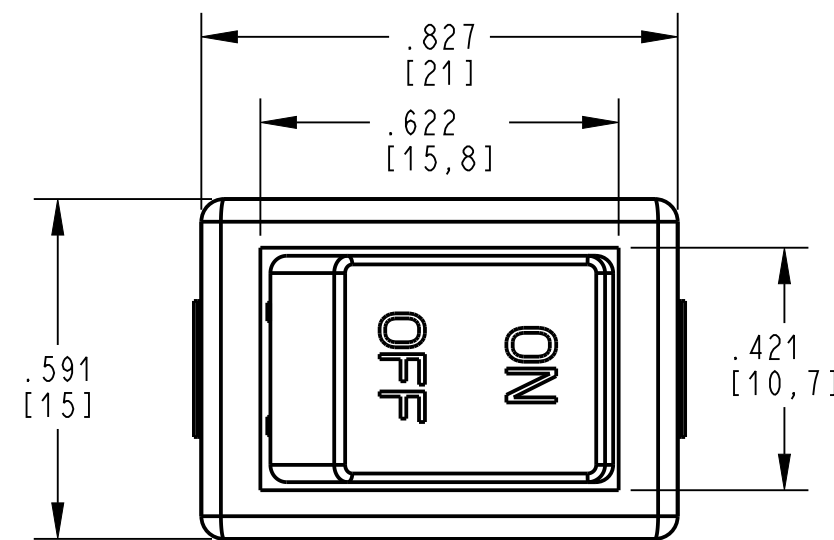

SCALE 2:1

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ELECTRICAL CHARACTERISTICS:

RATING TO BE MARKED ON HOUSING:

10A 125VAC
8A 250 VAC
1/4 HP 125/250VAC

CE 15 10(4)A 250V~ T125/55



us 15 12(4)A 125/250V~

2. DIELECTRIC WITHSTAND VOLTAGE: 1500 VAC FOR 1 MINUTE
INSULATION RESISTANCE: 100MΩ MIN. AT 500 VDC
INITIAL CONTACT RESISTANCE: 20mΩ MAX.
ELECTRICAL LIFE: 10,000 CYCLES



3. MECHANICAL CHARACTERISTICS:

COLORS: HOUSING - BLACK
ACTUATOR: RED
TERMINAL (4): SOLDER TAG .185+.004/- .002
[4.7+0,1/-0,05 WIDE X .031 ±.001 [0,8±0,03] THK

4. ILLUMINATION: 100-125VAC

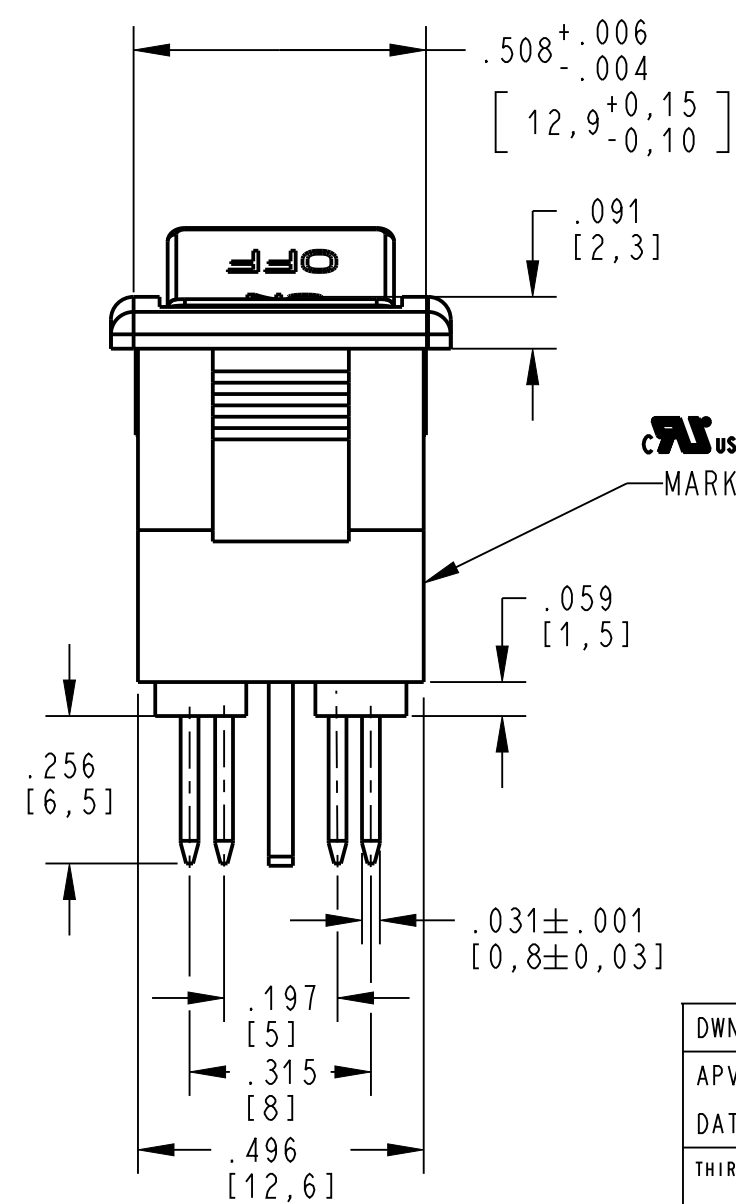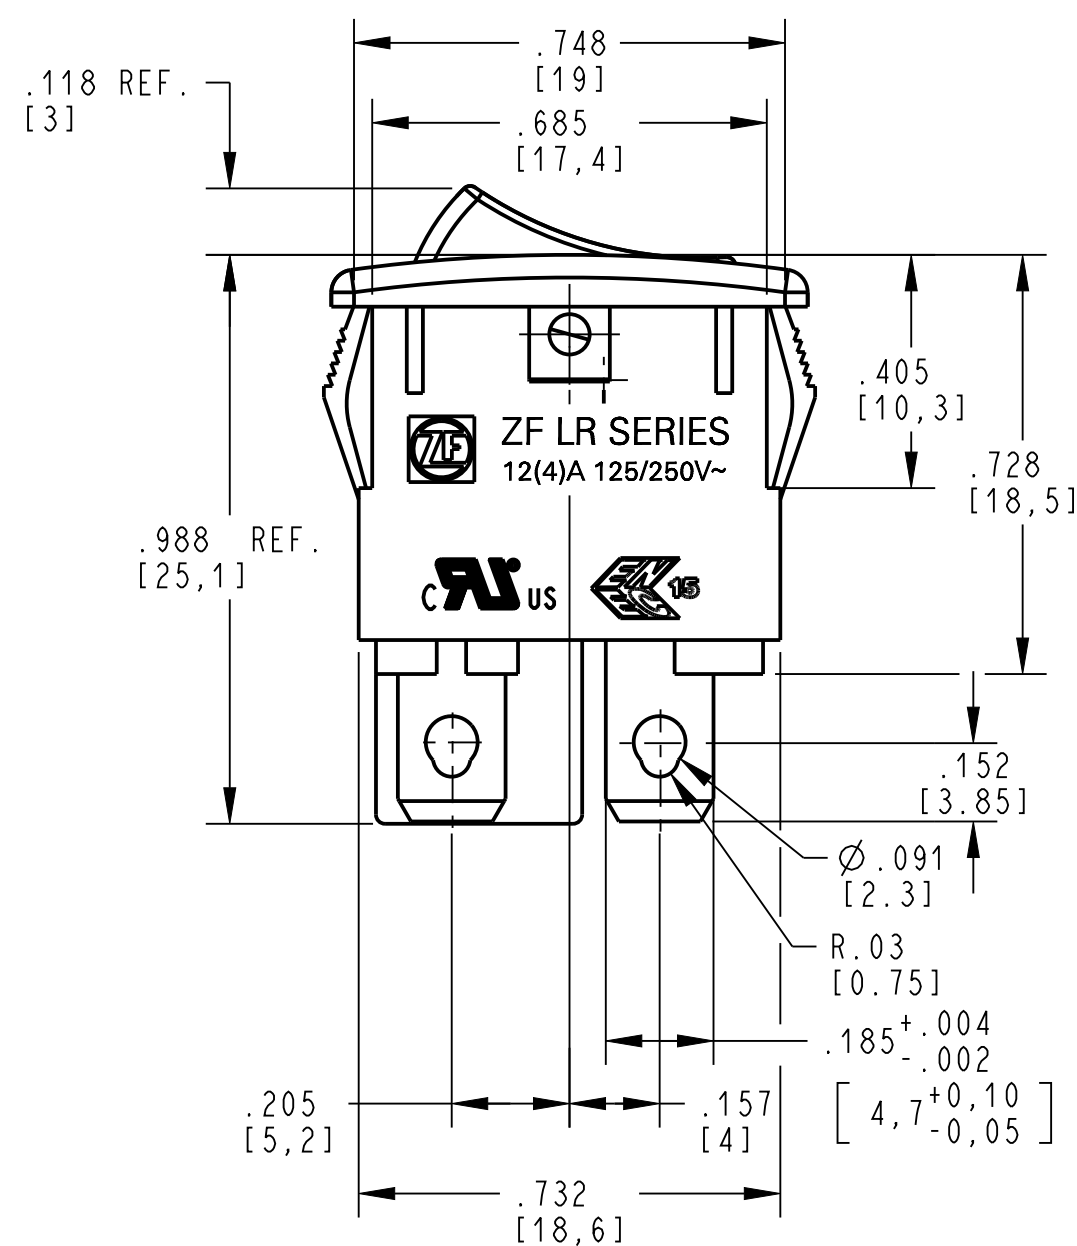


MARKING

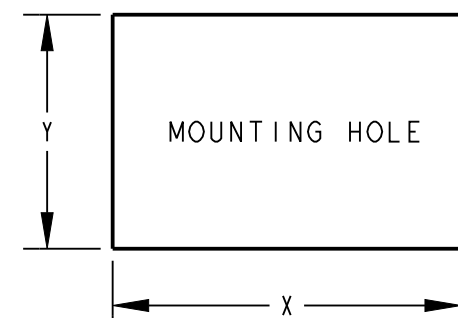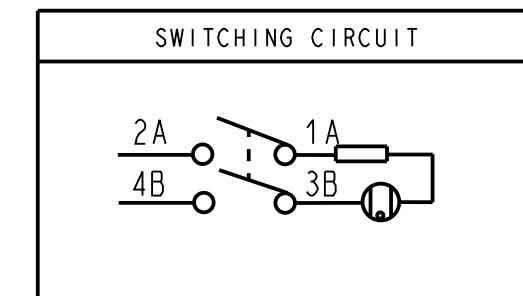

PANEL THICKNESS	DIM. X	DIM. Y
.030 TO .049 [0,75~1,25]	.756+.004/- .000 [19,2+0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]
.049 TO .079 [1,25~2,0]	.764+.004/- .000 [19,4+0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]
.079 TO .118 [2,0~3,0]	.780+.004/- .000 [19,8+0,1/0,0]	.508+.006/- .000 [12,9+0,15/-0,0]

DWN: TLM
APVD: CY
DATE: 18-Sep-09
THIRD ANGLE PROJECTION



CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THEREIN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

H	Z000686755	2023-04-25	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR
N/A

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °

B	ITEM NO. LRA32H2BBRLN
SCALE:	3:1
SH	1 OF 1