
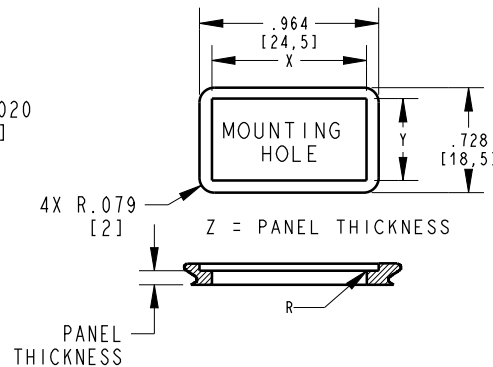
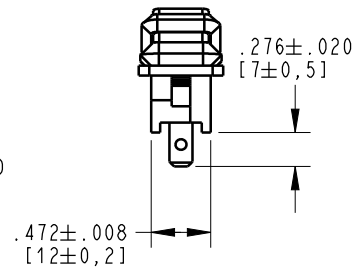

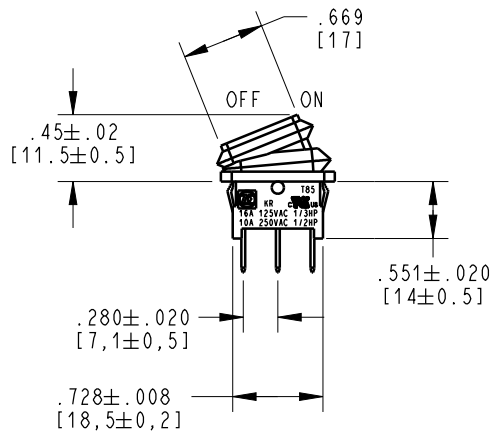
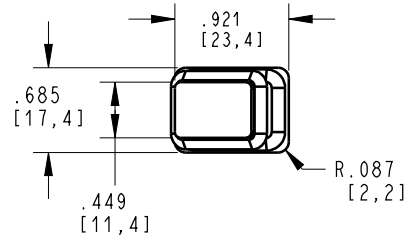


NOTES (UNLESS OTHERWISE SPECIFIED):

- RATING TO BE MARKED ON HOUSING
16A 125VAC, 1/3 HP 
10A 250VAC, 1/2 HP 
U.L. ENDURANCE RATING: 6000 CYCLES.
- INITIAL CONTACT RESISTANCE: 50m Ω MAXIMUM
- INSULATION RESISTANCE: 500VDC 100M Ω MINIMUM
- DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.
- TEMPERATURE: -25°C TO 85°C
- WATERPROOF: IP65 CAPABLE
- ACTUATOR: RED CLEAR PC (94-V2), NO LEGEND.
HOUSING: BLACK, NYLON 66 (94-V2).
WATERPROOF RUBBER BLACK SILICONE.
- DATE CODE FORMAT: YYWW
- LIGHTED: DEPENDENT; NEON BULB RATED AT ~250V.
- TERMINALS: SILVER-PLATED, COPPER ALLOY. TERMINAL 3 (FOR LAMP) IS BRASS CLEAN. .187 $\pm$.004 [4,8 $\pm$ 0,1] X .031 $\pm$.001 [0,8 $\pm$ 0,03] QUICK CONNECT. HOLE DIAMETER .087 $\pm$.008 [2,2 $\pm$ 0,2]
- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.



THICKNESS	DIM. X	DIM. Y
.030 TO .059 [0,75 TO 1,5]	.764+.000/- .004 [19,4+0,0/-0,1]	.512+.004/- .000 [13+0,1/-0,0]
.059 TO .098 [1,5 TO 2,5]	.780+.000/- .004 [19,8+0,0/-0,1]	.512+.004/- .000 [13+0,1/-0,0]

DWN: R. YANEZ
APVD: E. LESLIE
DATE: 11-Mar-14

THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THEREIN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0°



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KR-SPST ON-OFF LIGHTED

B ITEM NO. KRE2AEA2RBB

SCALE: 1:1 SH 1 OF 1

D	ECO NO.	DATE	PREP	APVD
2000438665	10-Jan-18	JPD	ELL	

ORIGINAL ON PRO/E