
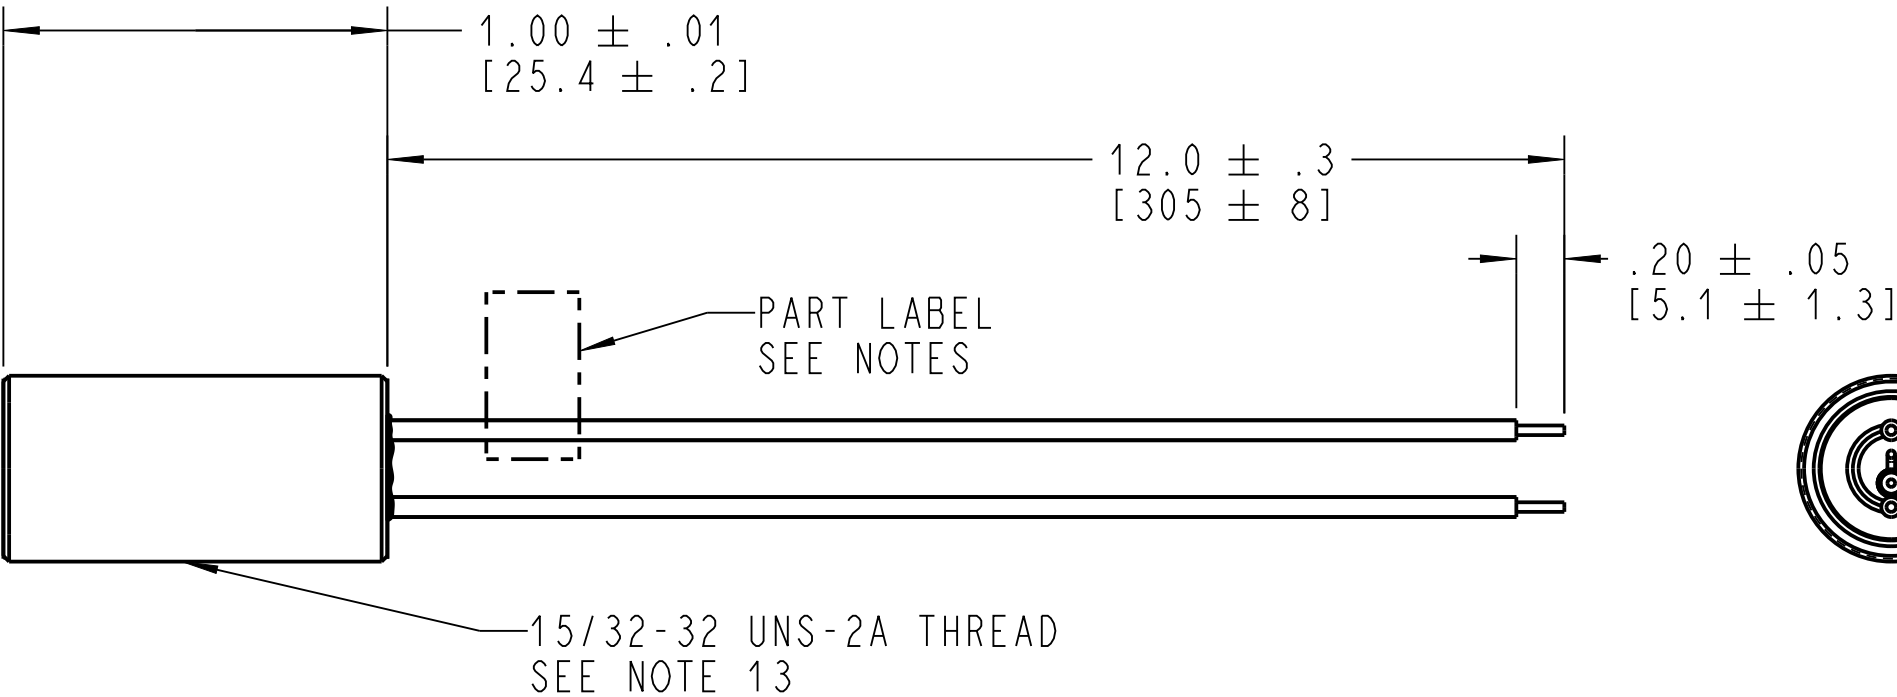




- NOTES:
- 1. ALL SENSORS ARE 100% FUNCTIONAL TESTED.
 - 2. PRODUCT IS ROHS COMPLIANT.
 - 3. OPERATING TEMPERATURE RANGE: -40°C TO 105°C
 - 4. LABEL TO INCLUDE:
 - MEXICO
 - ZF PART NUMBER
 - SERIAL NUMBER (SEE FORMAT BELOW):
 - JULIAN DATE XXXXXXXX-X
 - DAY (3 DIGITS)
 - YEAR (2 DIGITS)
 - CONSECUTIVE NUMBER (4 DIGITS)
 - SEPARATOR (1 DIGIT)
 - TESTER NUMBER (1 DIGIT)

- 5. PART LABEL TO BE PLACED 1 - 1 1/2" FROM END OF HOUSING.
- 6. REFER TO PRODUCT SPECIFICATION DOCUMENT NUMBER PSPEC-00005 FOR ADDITIONAL INFORMATION.
- 7. REED SENSOR: FORM A CONTACT (NORMALLY OPEN)
- 8. BLACK ANODIZE PER MIL-A-8625, CLASS 2, TYPE 2, BRIGHT FINISH PER CURRENT MIL STD.
- 9. LEADS: 24 AWG, 7/32 STR, UL1569 PVC.
- 10. POTTING: EPOXY.
- 11. TWO (2) HEX NUTS SUPPLIED.
- 12. PRIMARY DIMENSIONS ARE INCHES.
- 13. 15/32-32 UNS 2A THREAD SPEC:
 - MAJOR Ø (MAX/MIN) = .4678 / .4618
 - PITCH Ø (MAX/MIN) = .4475 / .4440



DWN: EV		CONFIDENTIAL AND PROPRIETARY: ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THERE IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.				 ZF Electronic Systems	
APVD: GG							
DATE: 12-Mar-01						PLEASANT PRAIRIE, WISCONSIN U.S.A.	
THIRD ANGLE PROJECTION						NAME / DESCRIPTION	
		REED SENSOR ASSEMBLY MP200701					
PROJECT/ CSR		TOLERANCE UNLESS SPECIFIED		B		ITEM NO. ES021098	
		DWG UNITS	X.XX	X.XXX	ANGLES	SCALE: 2:1 SH 1 OF 1	
		mm/ INCH	± 0.25/.01	± 0.13/.005	± 2.0 °		

E	Z000491652	19-Feb-19	CRM	TB
REV	ECO NO.	DATE	PREP	APVD