

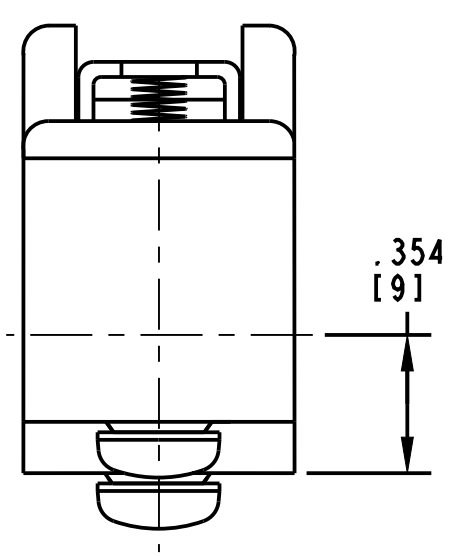


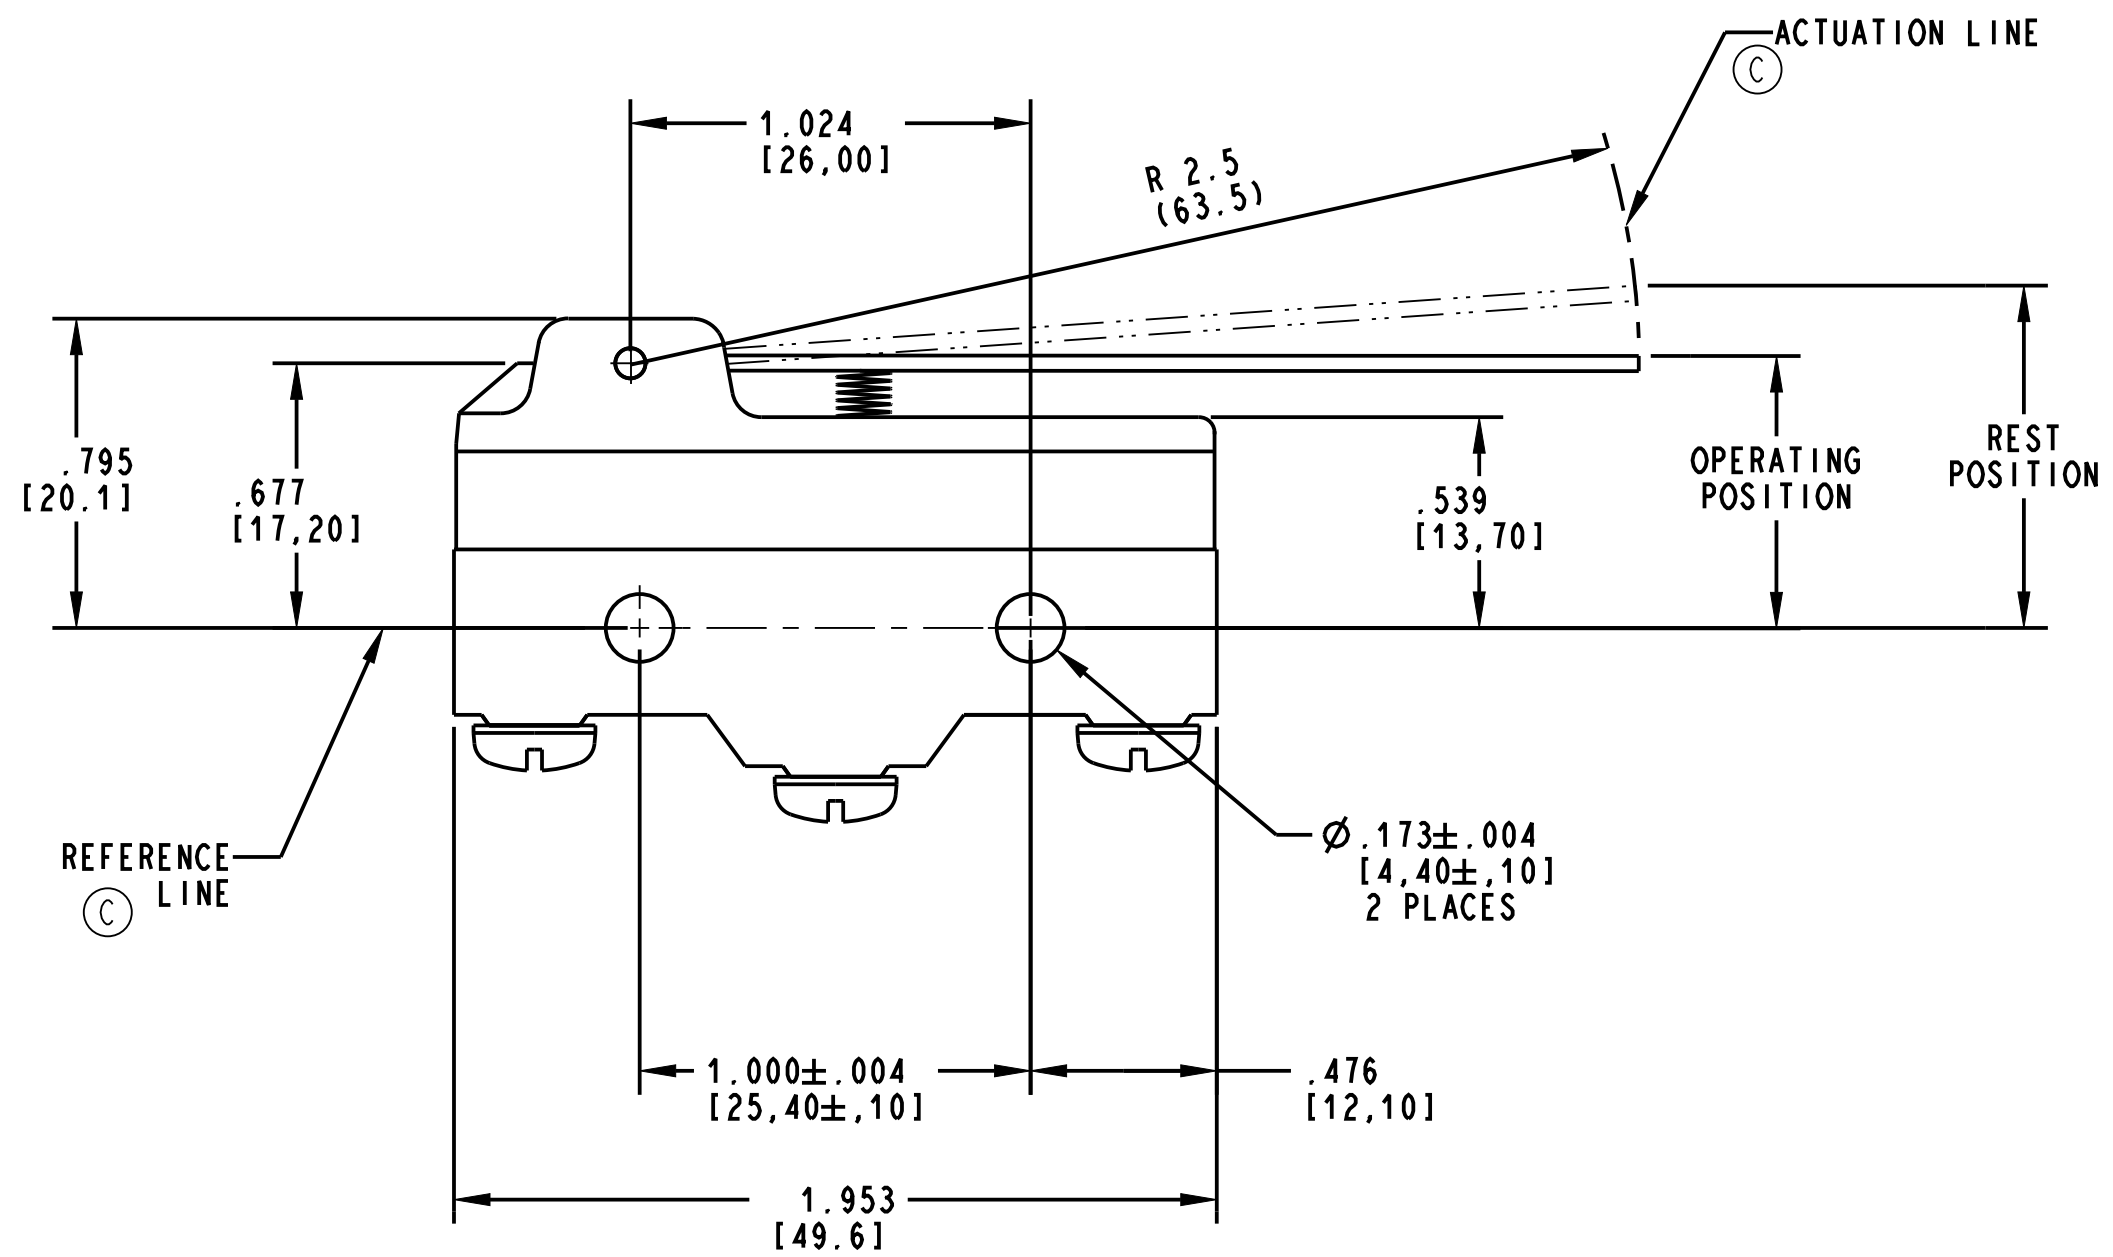

- NOTES (UNLESS OTHERWISE SPECIFIED):
- 1 RECOMMENDED MOUNTING:
M4 FASTENER WITH 6.00 IN-LB (7.00 KGF-CM) OF TORQUE MAXIMUM.
 - 2 RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORITORIES, INC.
 - 3 ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED
FROM THE REFERENCE LINE.
 - 4 FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.

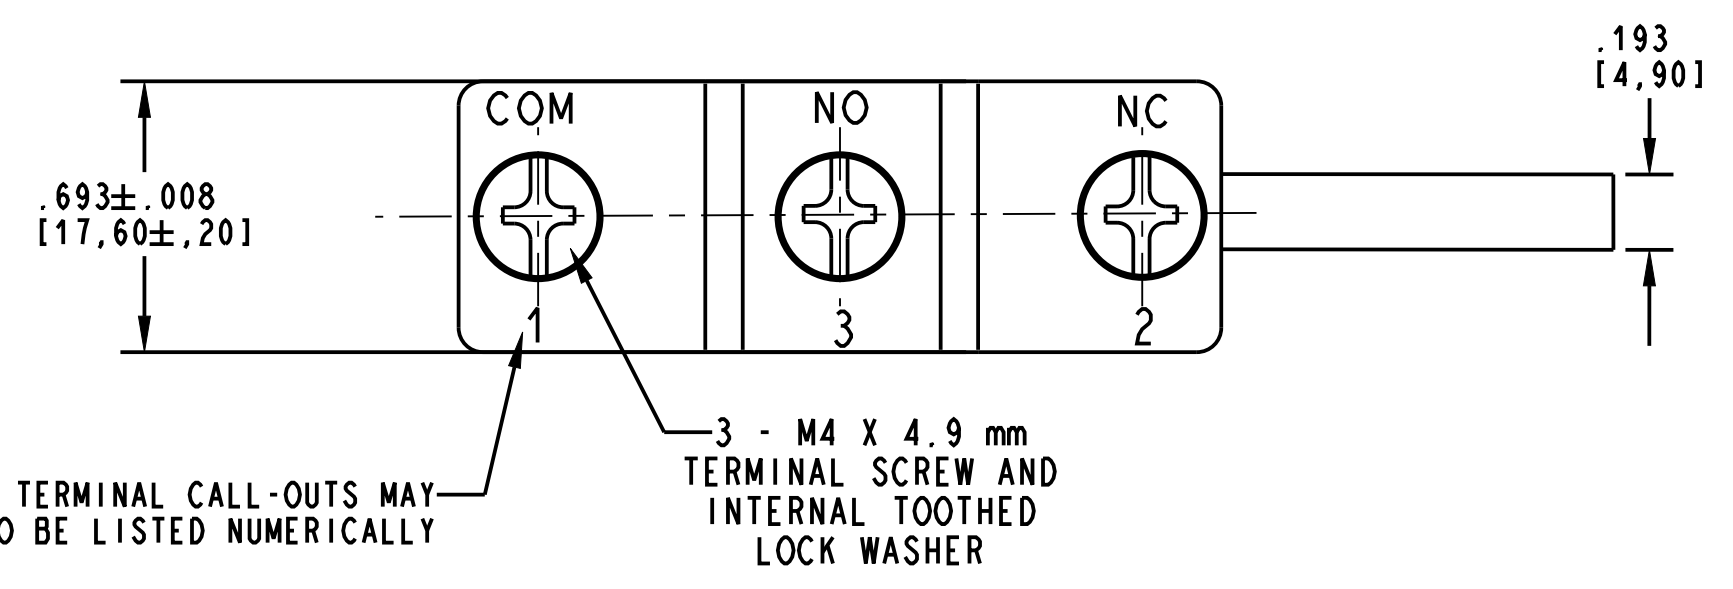

SWITCH CHARACTERISTICS	
ELECTRICAL RATING	20A 250VAC (cULus) T55°C
TERMINAL	SCREW
OPER. FORCE MAX.	80 GMS
RELEASE FORCE MIN.	14 GMS
PRETRAVEL MAX.	.394 [10.0 mm]
OVERTRAVEL MIN.	.220 [5.61 mm]
MOVE. DIFF. MAX.	.050 [1.27 mm]
OPERATING POSITION	.716 TO .780 [18.2 TO 19.8 mm]

DWN: TLM

APVD: S.G.

DATE: 2025-03-27

THIRD ANGLE PROJECTION

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.

ZF Electronic Systems
PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME / DESCRIPTION
SWITCH

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.015	± 5 °

C	Z000359704	2016-04-21	TLM	ELL	PROJECT/ CSR	4000000138
REV	ECO NO.	DATE	PREP	APVD		

C	ITEM NO.	GPTBLS01
SCALE:	2:1	SH 1 OF 1

ORIGINAL ON PROJE