

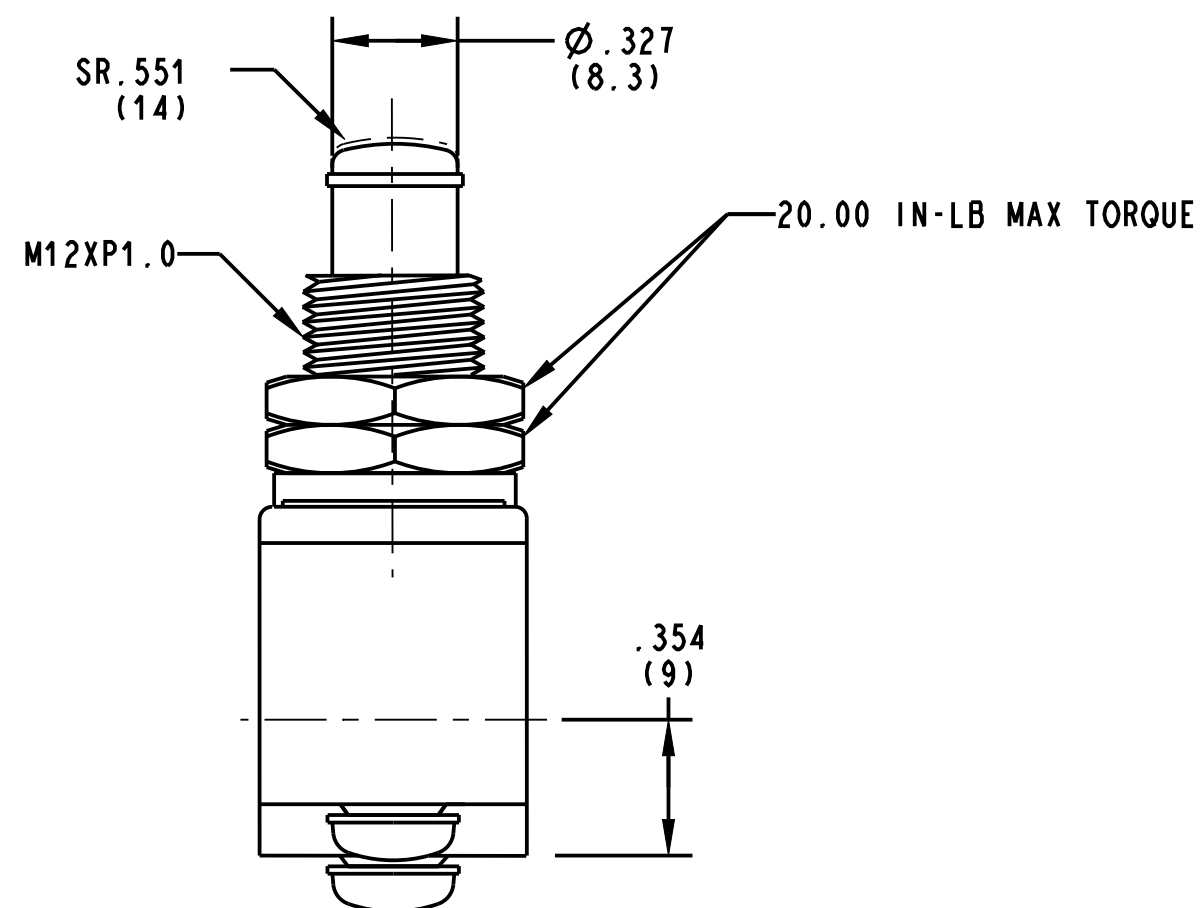


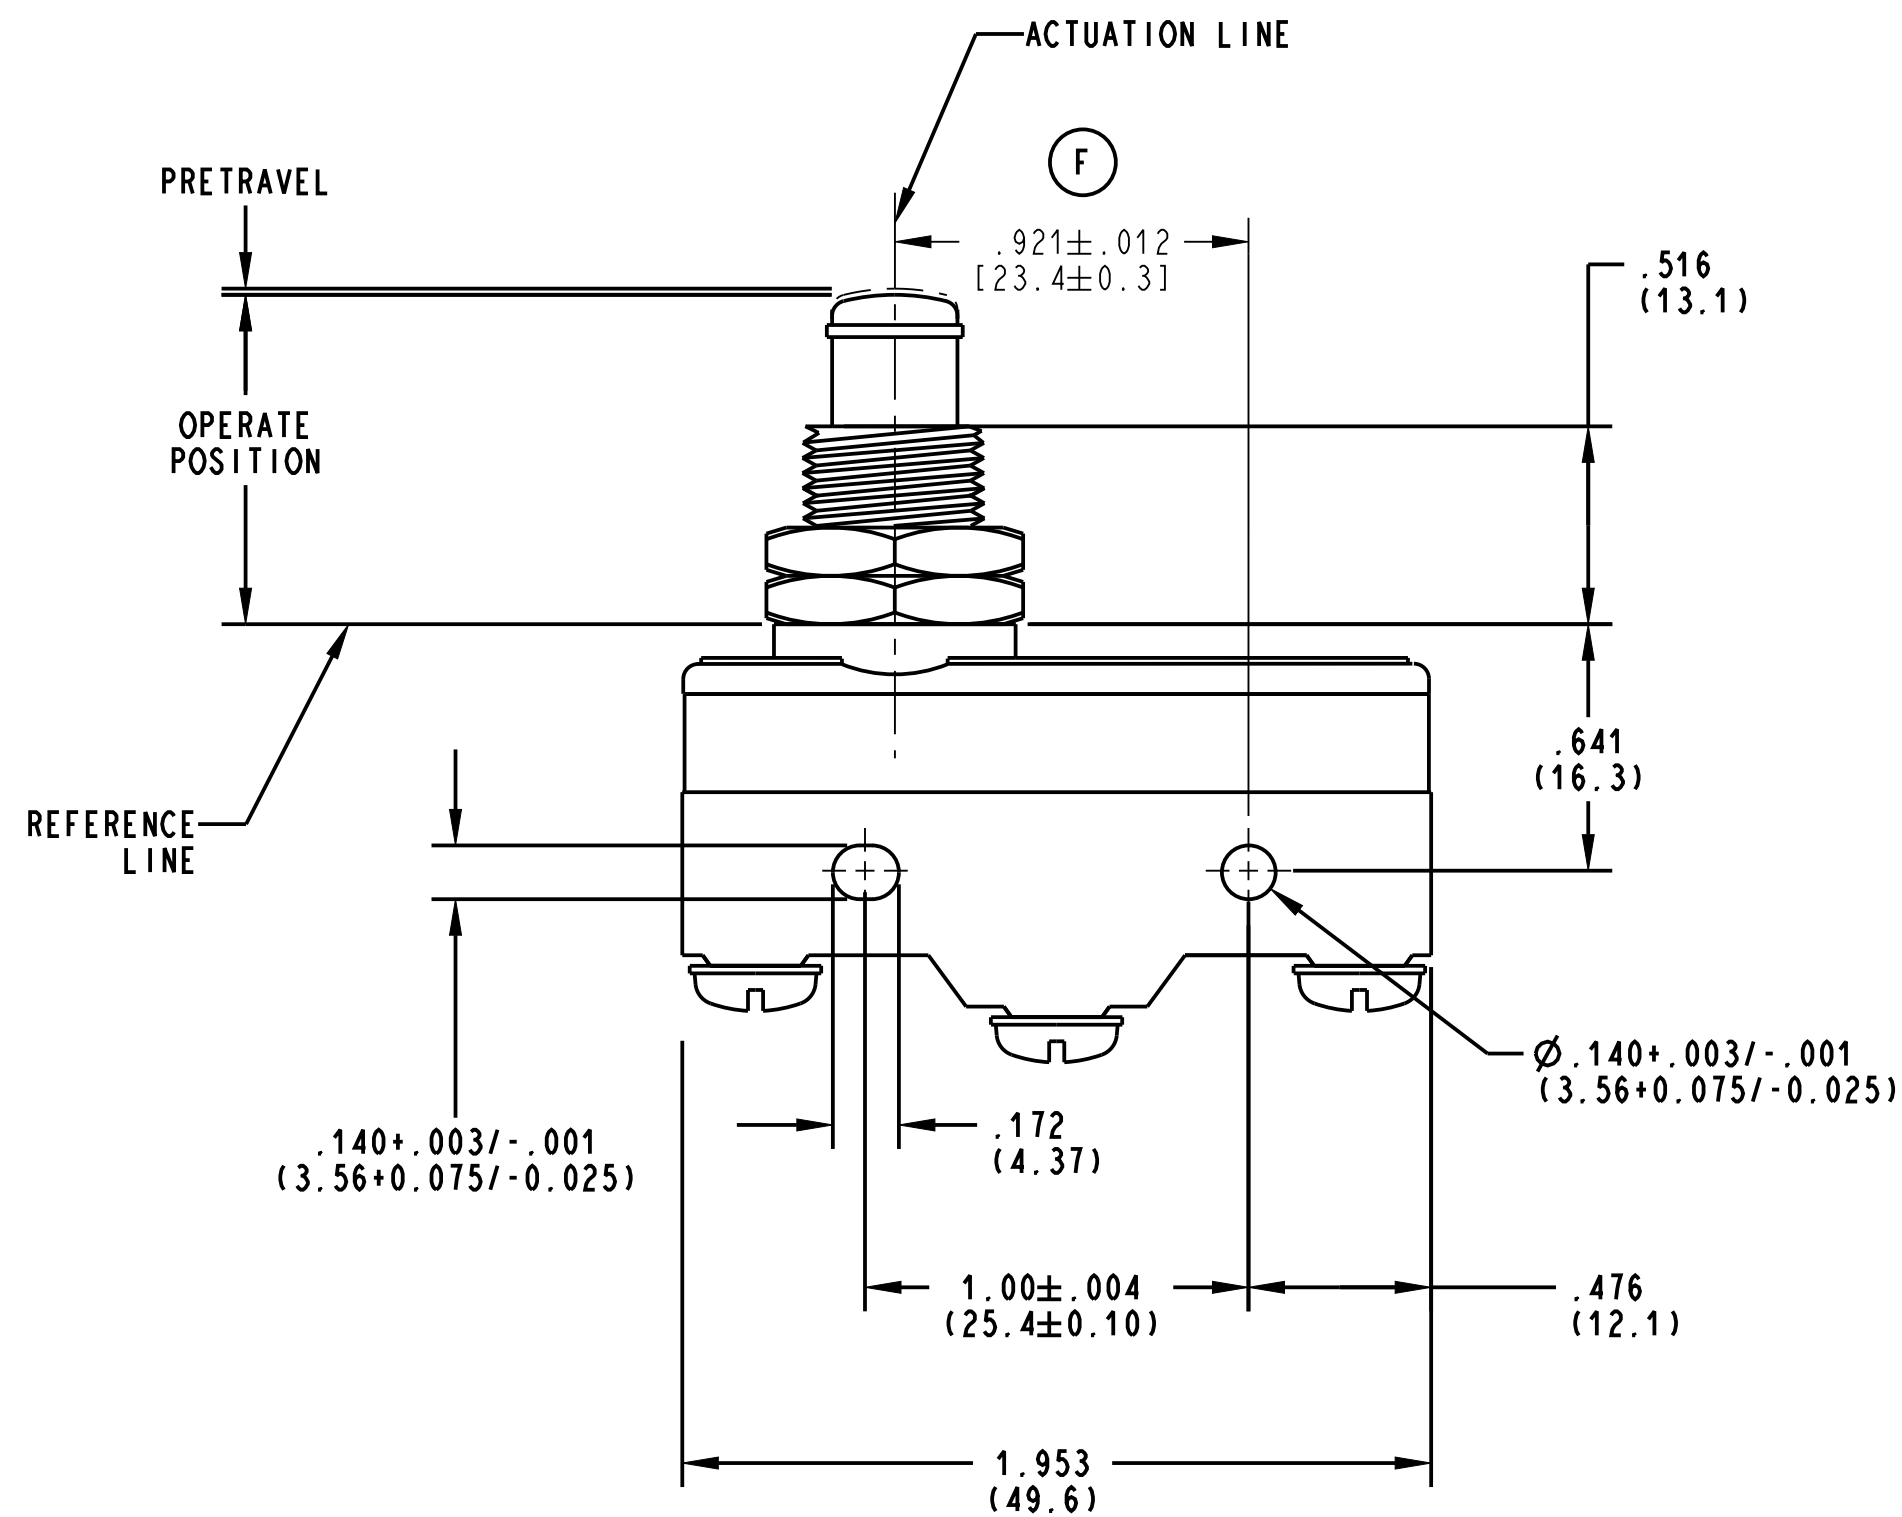

NOTES (UNLESS OTHERWISE SPECIFIED):

- 1 RECOMMENDED MOUNTING:
#6-32 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
- 2 RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
- 3 ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED
FROM THE REFERENCE LINE.
- 4 FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.

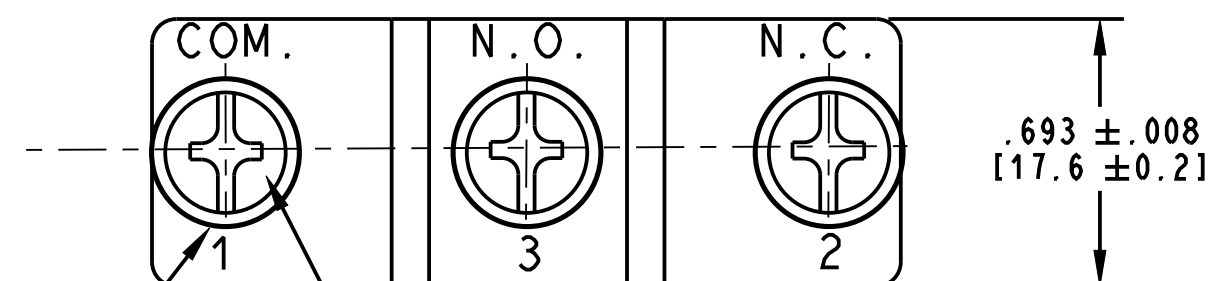

TERMINAL CALL-OUTS MAY
ALSO BE LISTED NUMERICALLY

3 - M4 X 4.9 mm
TERMINAL SCREW AND
INTERNAL TOOTHED
LOCK WASHER

CHARACTERISTICS


ELECTRICAL RATING	20A 250VAC (cULus) T55°C
TERMINAL	SCREW
OPER. FORCE MAX.	650 GMS
RELEASE FORCE MIN.	200 GMS
PRETRAVEL MAX.	.028 [0.7 mm]
OVERTRAVEL MIN.	.217 [5.5 mm]
MOVE. DIFF. MAX.	.008 [0.2 mm]
OPERATING POSITION	.826 TO .890 [21.0 TO 22.6 mm]

DWN: TLM/JED

APVD: SG

DATE: 21-JUN-04

THIRD ANGLE PROJECTION



CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

F	Z000374396	2016-08-08	GP	EL	PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES	C	ITEM NO.	GPTBNH11
REV	ECO NO.	DATE	PREP	APVD	4000000138	INCHES	± 0.02	± 0.015	$\pm 5^\circ$	SCALE:	N.T.S.	SH 1 OF 1