

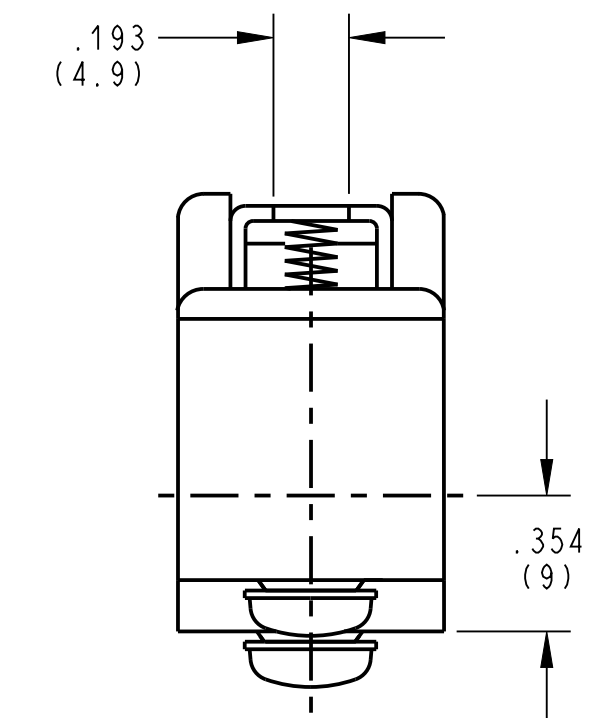


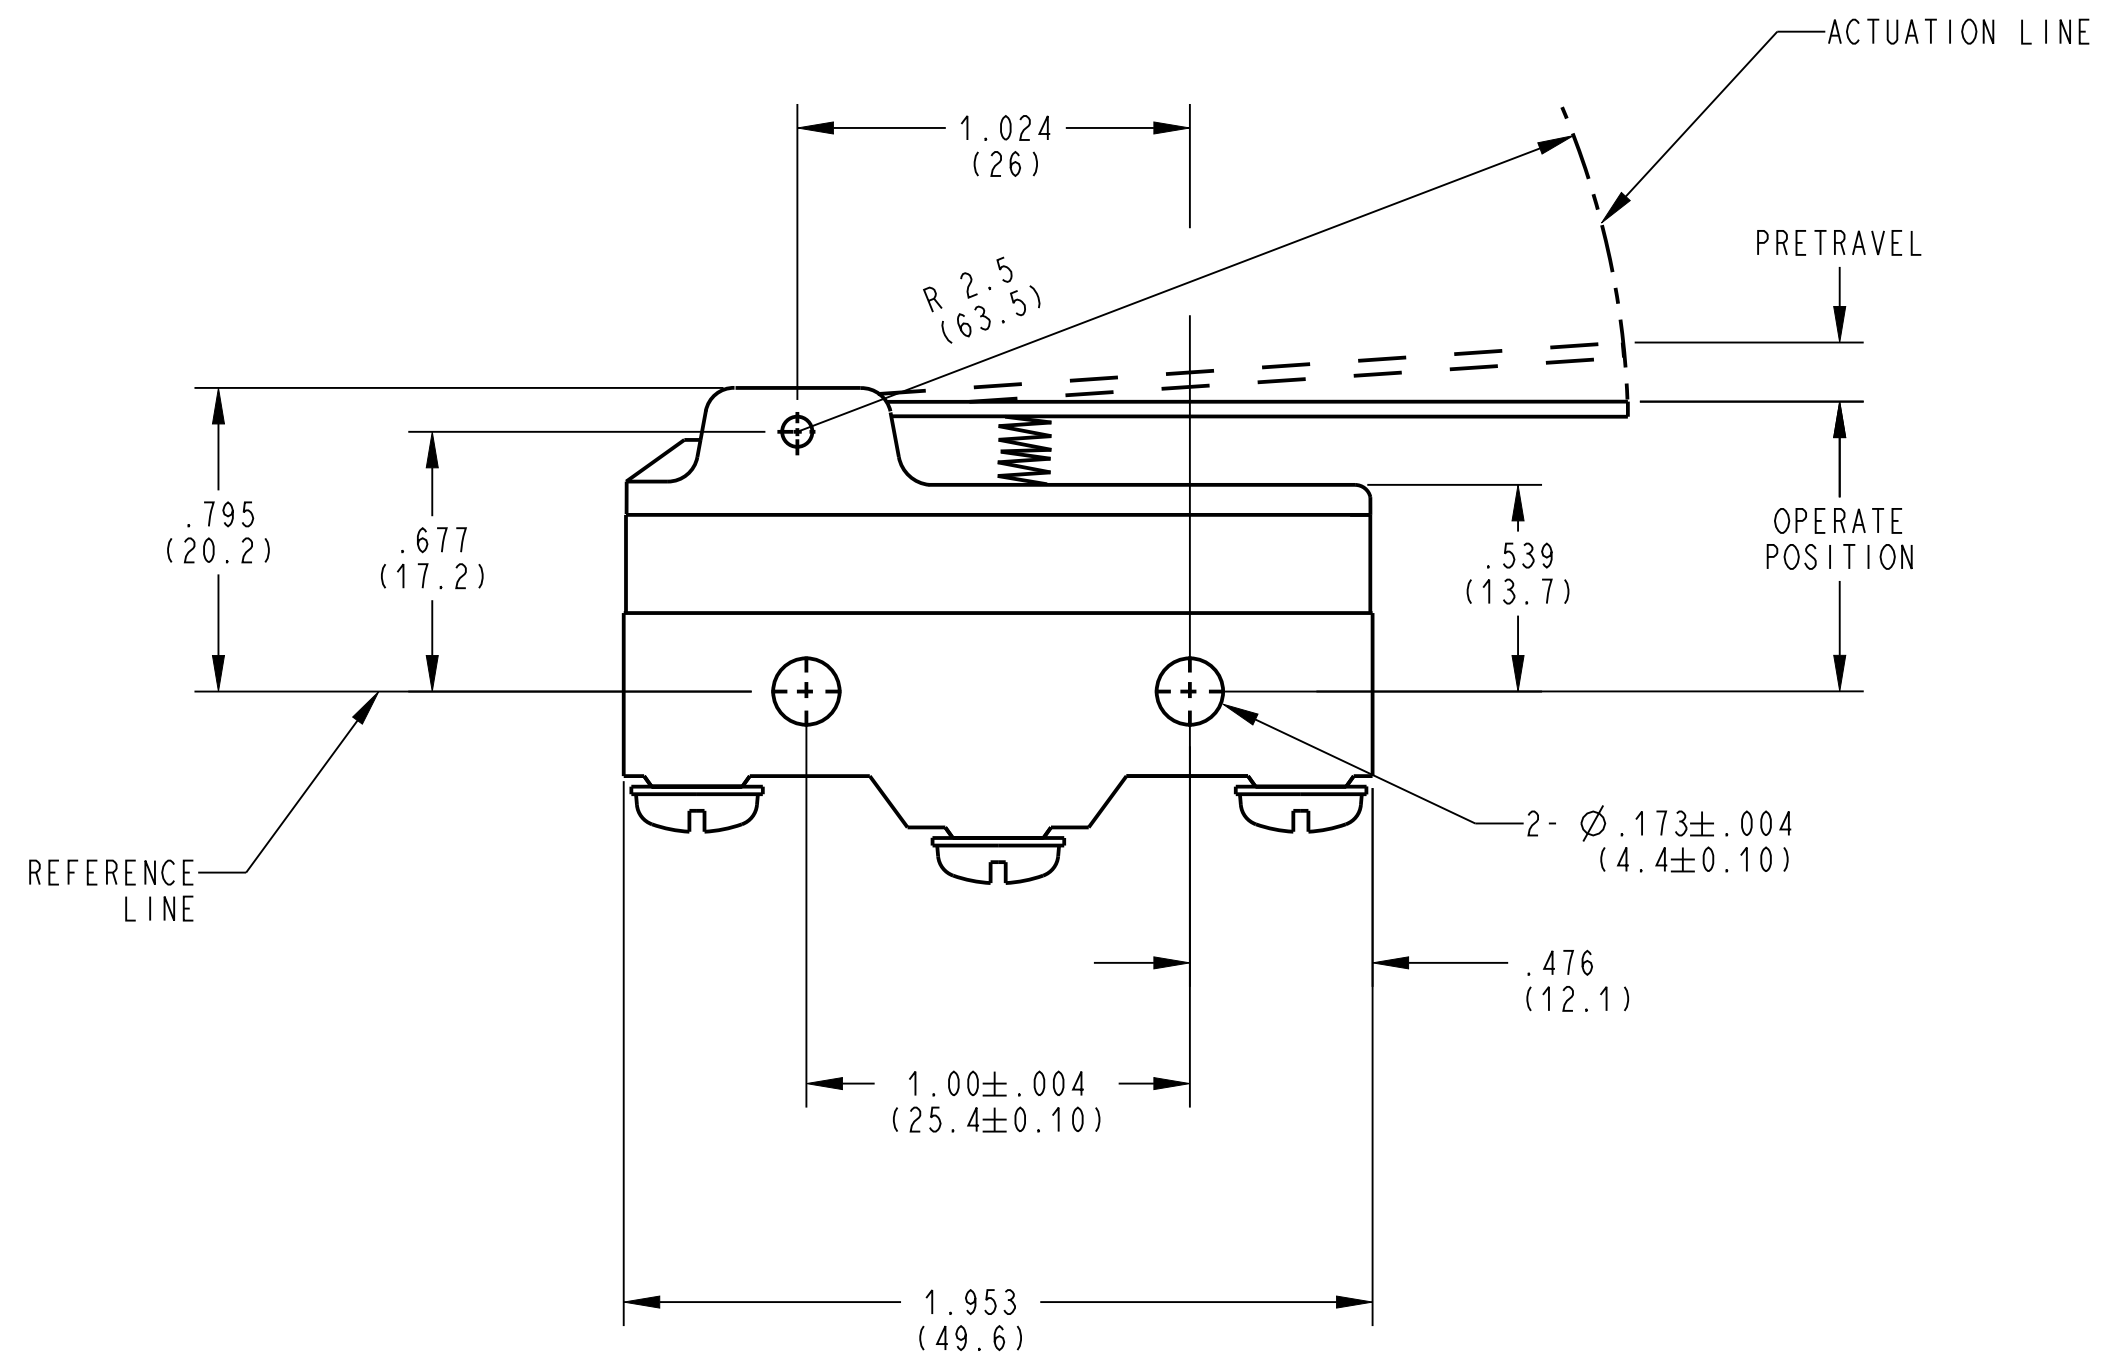


- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. RECOMMENDED MOUNTING:
M4 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
 2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER
THE COMPONENT RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.
 3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE
AND MEASURED FROM THE REFERENCE LINE.
 4. FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.

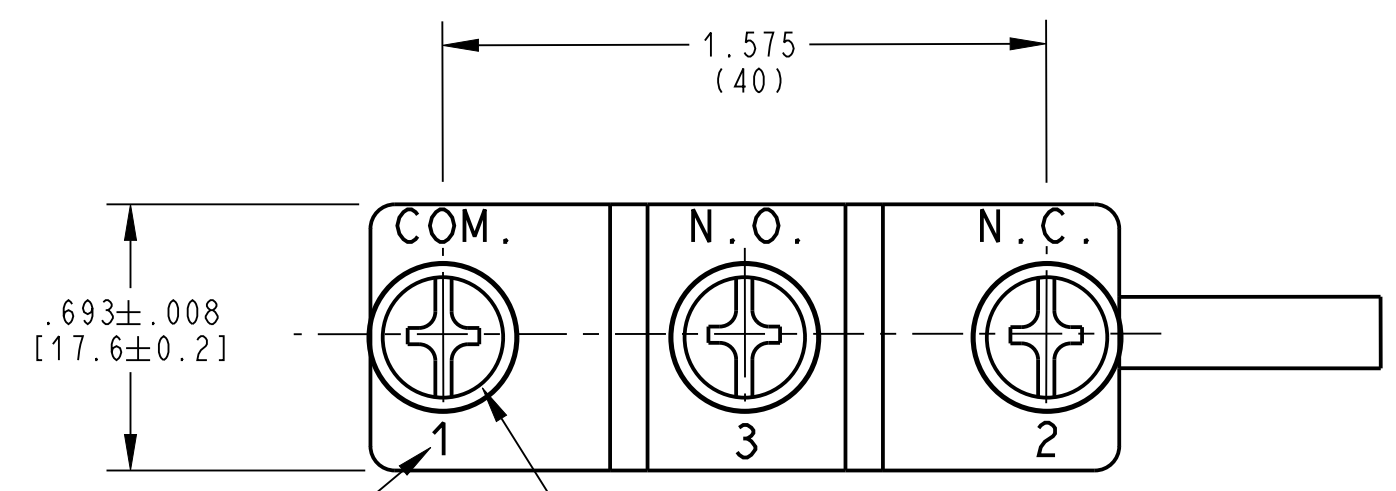

TERMINAL CALL-OUTS MAY
ALSO BE LISTED NUMERICALLY

3 - M4 X 4.9 mm
TERMINAL SCREW AND
INTERNAL TOOTHED
LOCK WASHER

CHARACTERISTICS	
ELECTRICAL RATING	15A 250 VAC (cULus) T55°C 15A 250 V~ (VDE) -5T40
TERMINAL	SCREW
OPER. FORCE MAX.	70 GMS
RELEASE FORCE MIN.	14 GMS
PRETRAVEL MAX.	.394 [10 mm]
OVERTRAVEL MIN.	.220 [5.6 mm]
MOVE. DIFF. MAX.	.050 [1.27 mm]
OPERATING POSITION	.716 TO .780 [18.2 TO 19.8 mm]

DWN: J. DOLNIK		CONFIDENTIAL AND PROPRIETARY: ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THERE IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.				 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION						
APVD: SB												
DATE: 10-Jan-05												
THIRD ANGLE PROJECTION 		TOLERANCE UNLESS SPECIFIED				SPEC DRAWING						
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES	C	ITEM NO.	GPTCLS01				
REV		ECO NO.	DATE	PREP	APVD	INCHES	± 0.02	± 0.015	± 0.5 °	SCALE:	N.T.S.	SH 1 OF 1

E	Z000360145	20-Apr-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD