

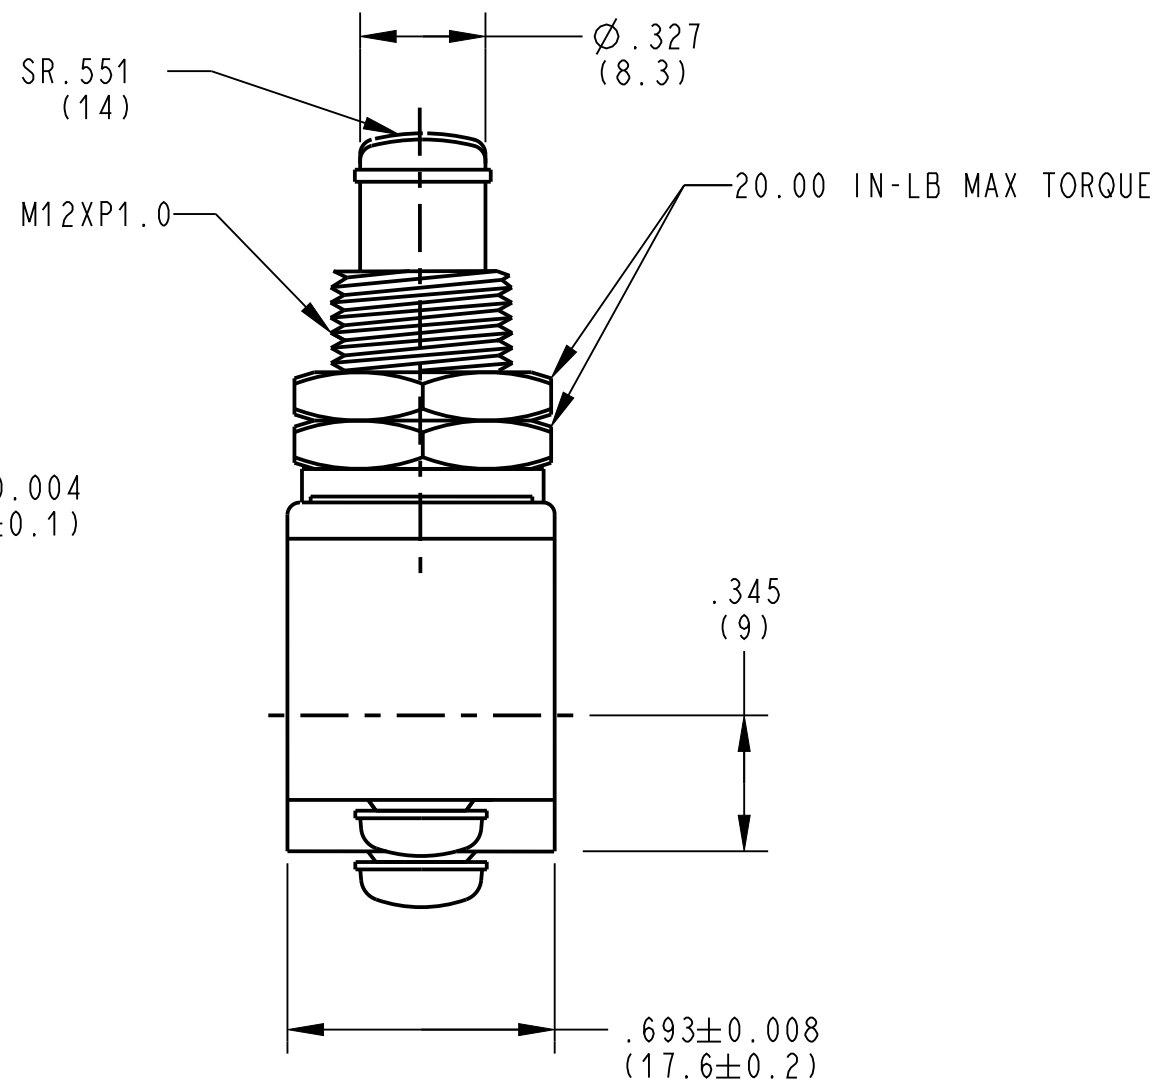


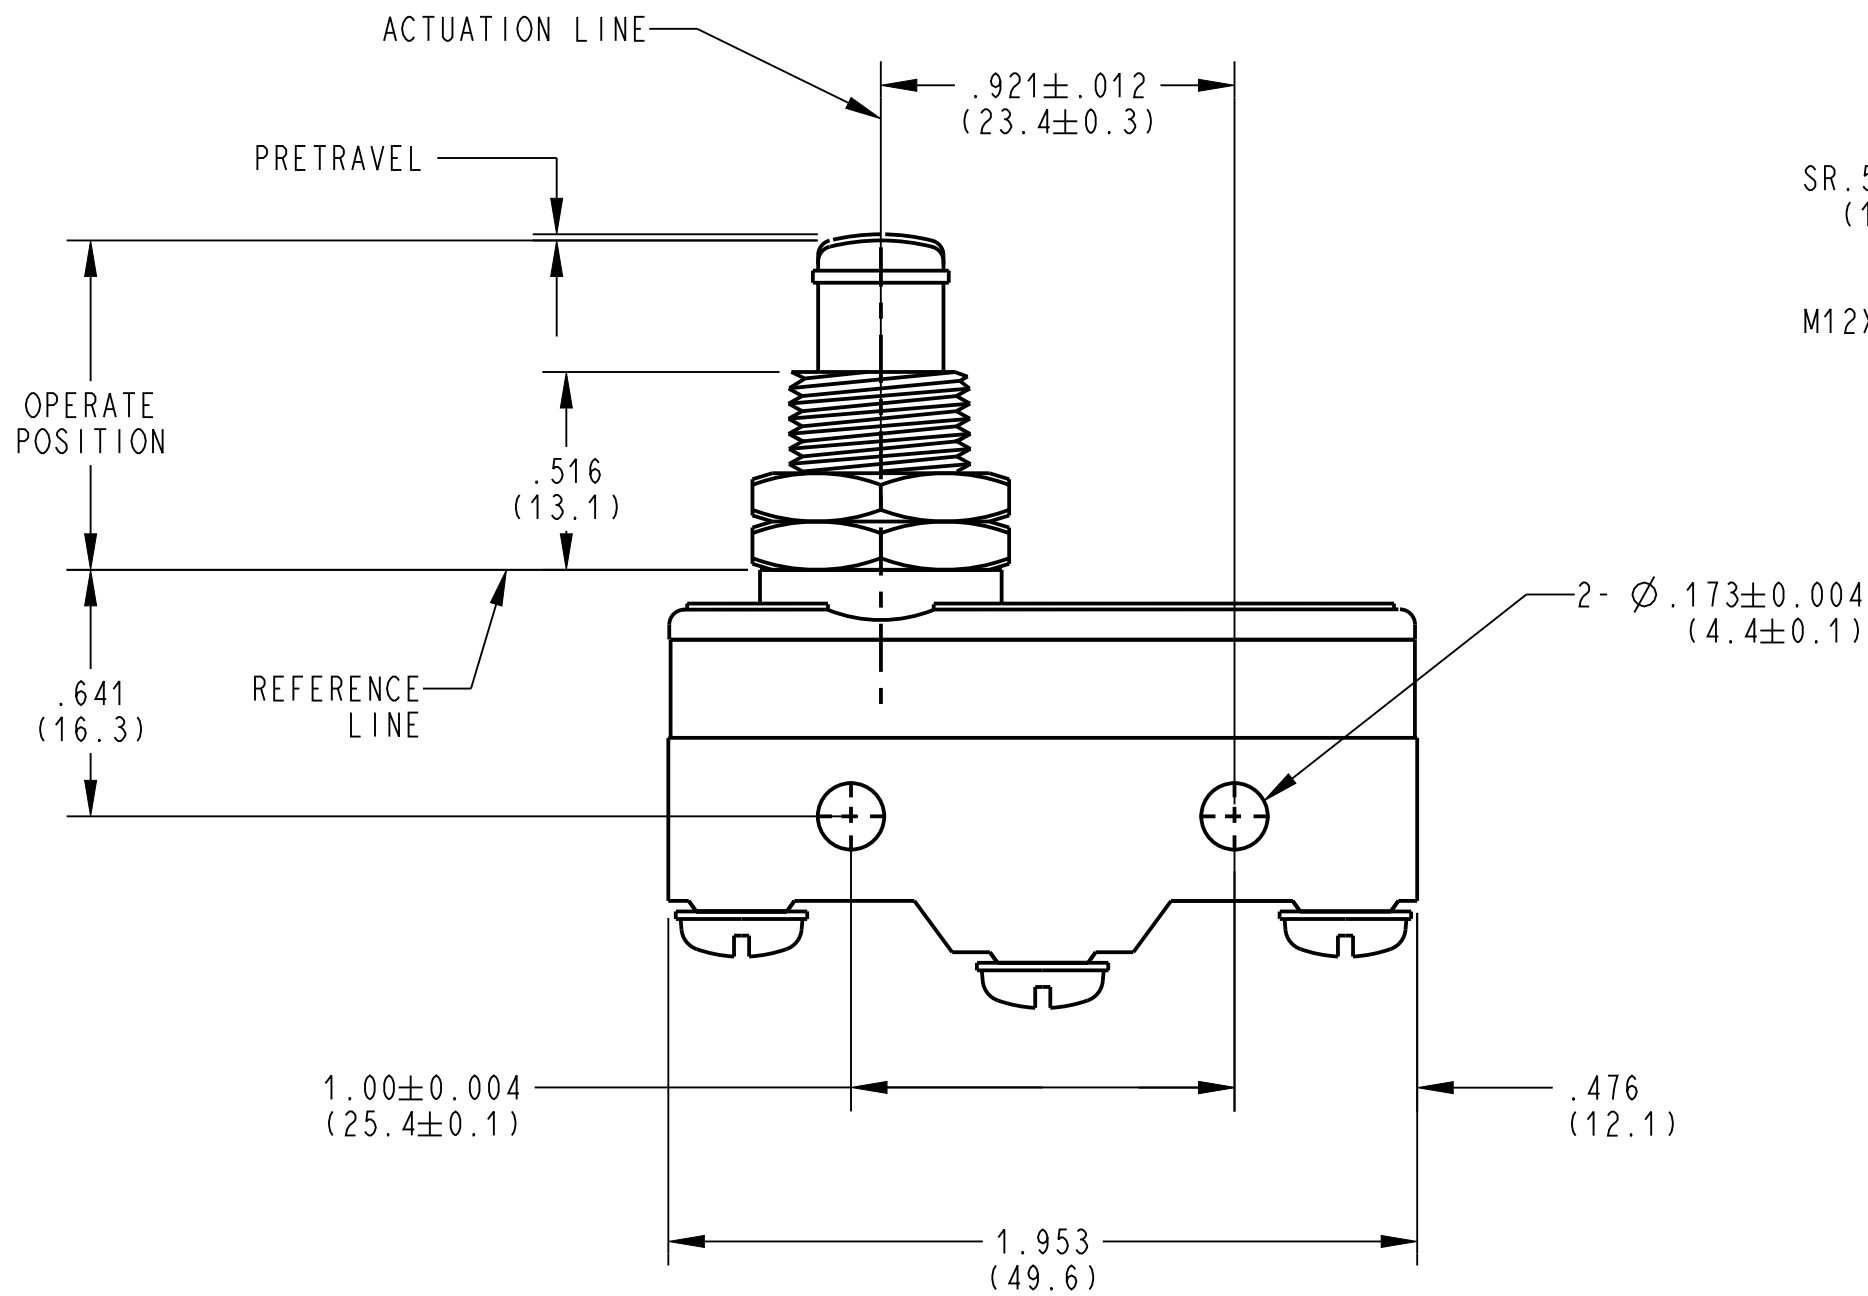

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RECOMMENDED MOUNTING:
M4 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
4. FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.

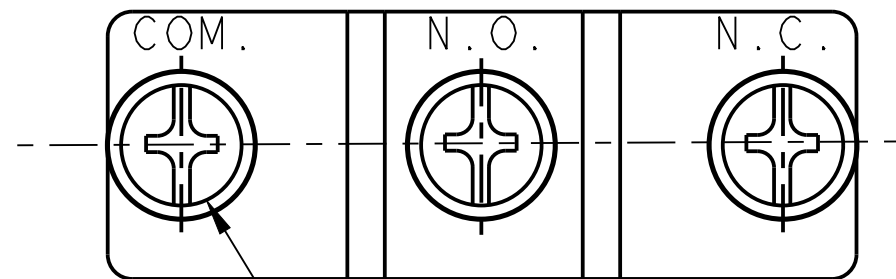


3 - M4 X 4.9 mm
TERMINAL SCREW AND
INTERNAL TOOTHED
LOCK WASHER

CHARACTERISTICS

ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE) -5T40
TERMINAL	SCREW
OPER. FORCE MAX.	350 GMS
RELEASE FORCE MIN.	114 GMS
PRETRAVEL MAX.	.016 [0.4 mm]
OVERTRAVEL MIN.	.216 [5.5 mm]
MOVE. DIFF. MAX.	.002 [0.05 mm]
OPERATING POSITION	.826 TO .890 [21.0 TO 22.6 mm]

DWN: JED
APVD: SB
DATE: 25-May-04

THIRD ANGLE PROJECTION



CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SWITCH

D	Z000360145	20-Apr-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	4000000138
--------------	------------

TOLERANCE UNLESS SPECIFIED	DWG UNITS	X.XX	X.XXX	ANGLES
	INCHES	± 0.02	± 0.015	± 5 °

C	ITEM NO.	GPTCNH01
SCALE:	N.T.S.	SH 1 OF 1

ORIGINAL ON PROJE