

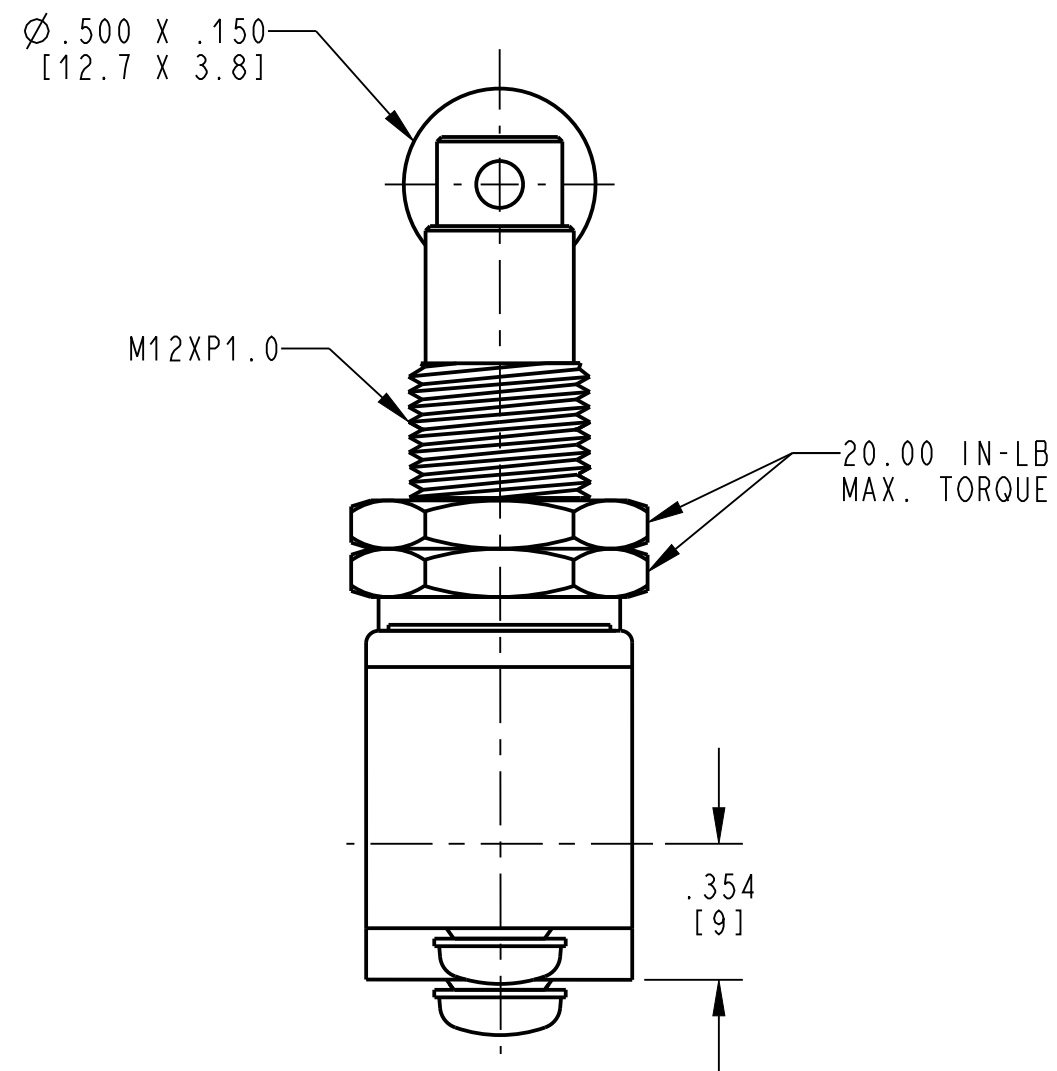


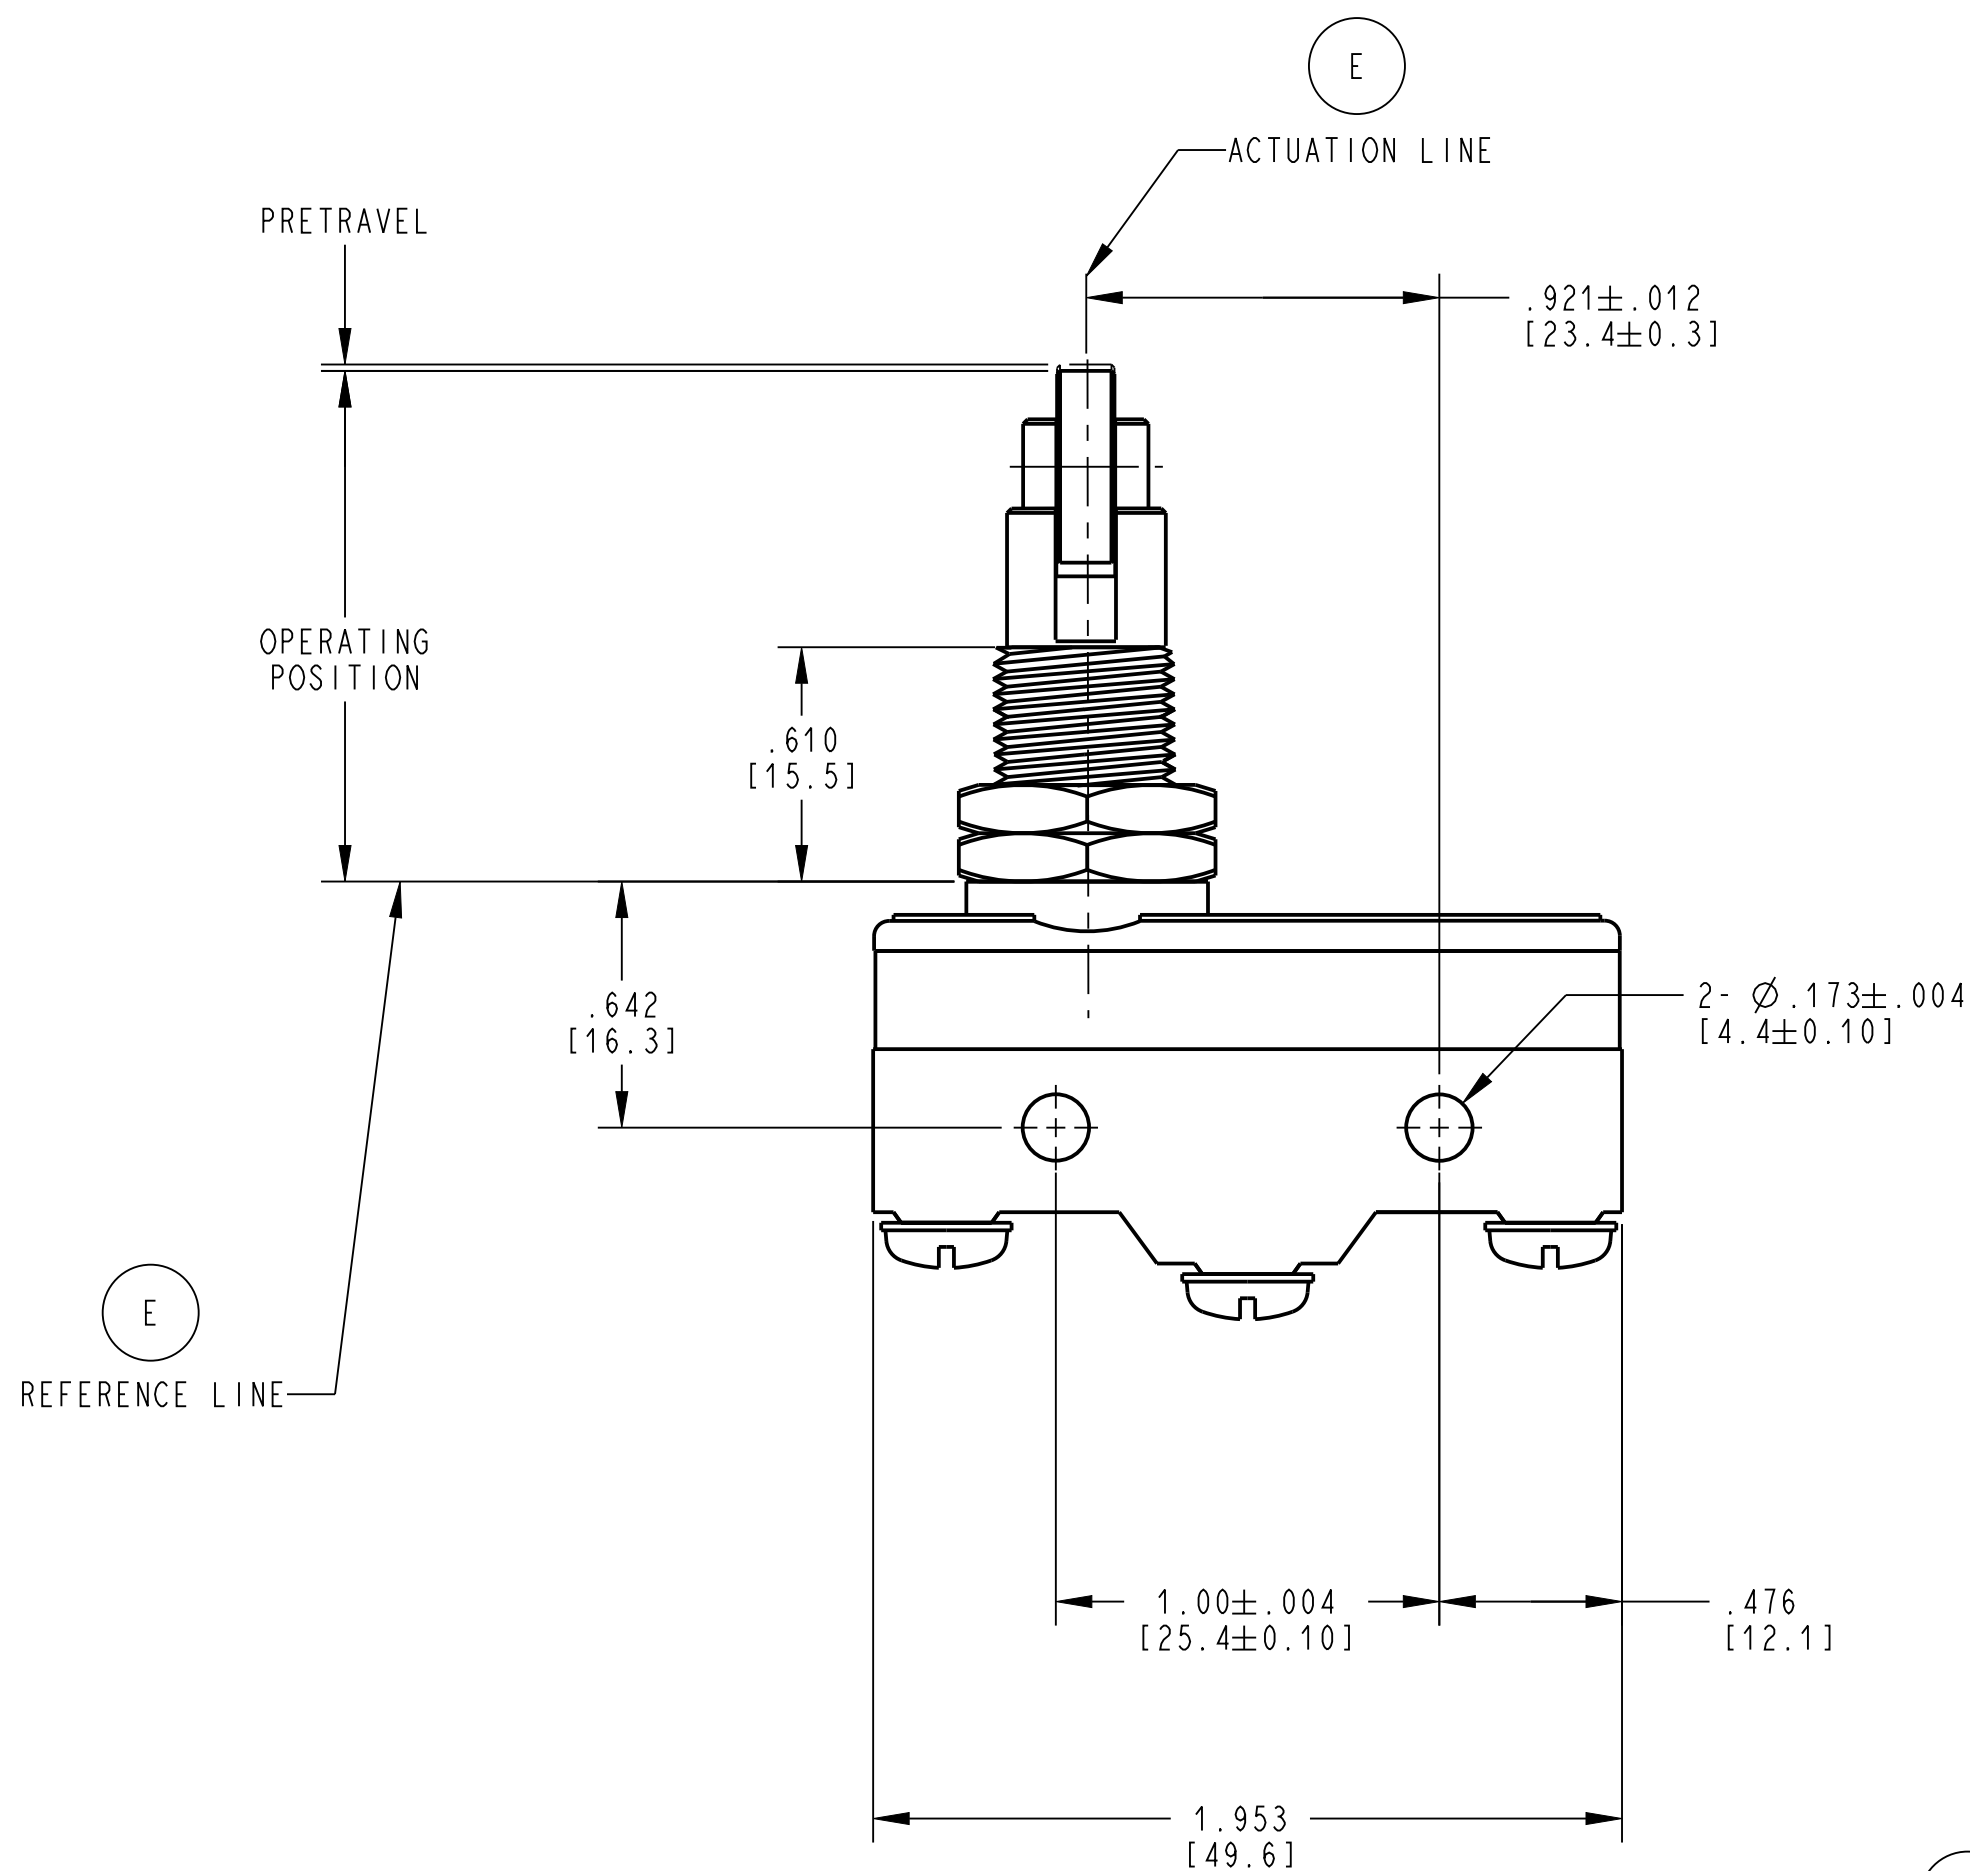

NOTES (UNLESS OTHERWISE SPECIFIED):

1. RECOMMENDED MOUNTING: M4 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
4. FOR MARKING AND NAMING SPECIFICATION SEE ES021295.

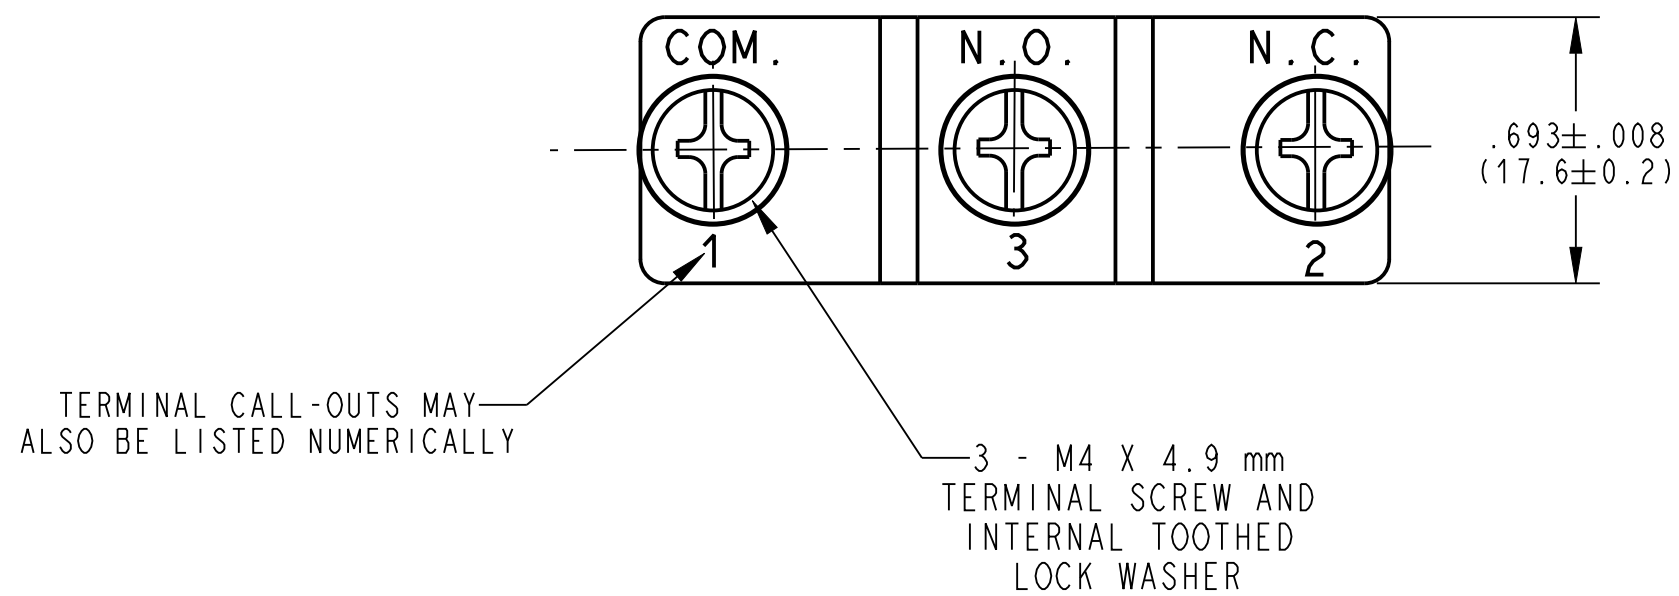


CHARACTERISTICS

ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE)-5T40
TERMINAL	SCREW
OPER. FORCE MAX.	350 GMS
RELEASE FORCE MIN.	114 GMS
PRETRAVEL MAX.	.016 [0.4 mm]
OVERTRAVEL MIN.	.140 [3.58 mm]
MOVE. DIFF. MAX.	.002 [0.05 mm]
OPERATING POSITION	1.268 TO 1.362 [32.2 TO 34.6 mm]

DWN: JED
APVD: SB
DATE: 25-May-04

THIRD ANGLE PROJECTION



CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SWITCH

TOLERANCE UNLESS SPECIFIED

DWG UNITS X.XX X.XXX ANGLES

PROJECT/ CSR

4000000138

INCH

± 0.02

± 0.015

± 5 °

C ITEM NO.

GPTCRH02

SCALE: DO NOT SCALE

SH 1 OF 1

E	Z0003600152	2016-04-20	GP	EL
REV	ECO NO.	DATE	PREP	APVD