
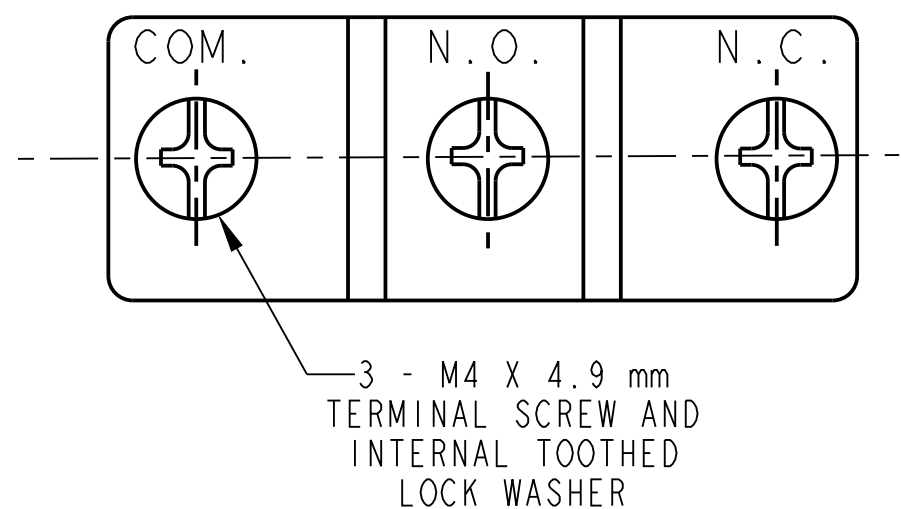
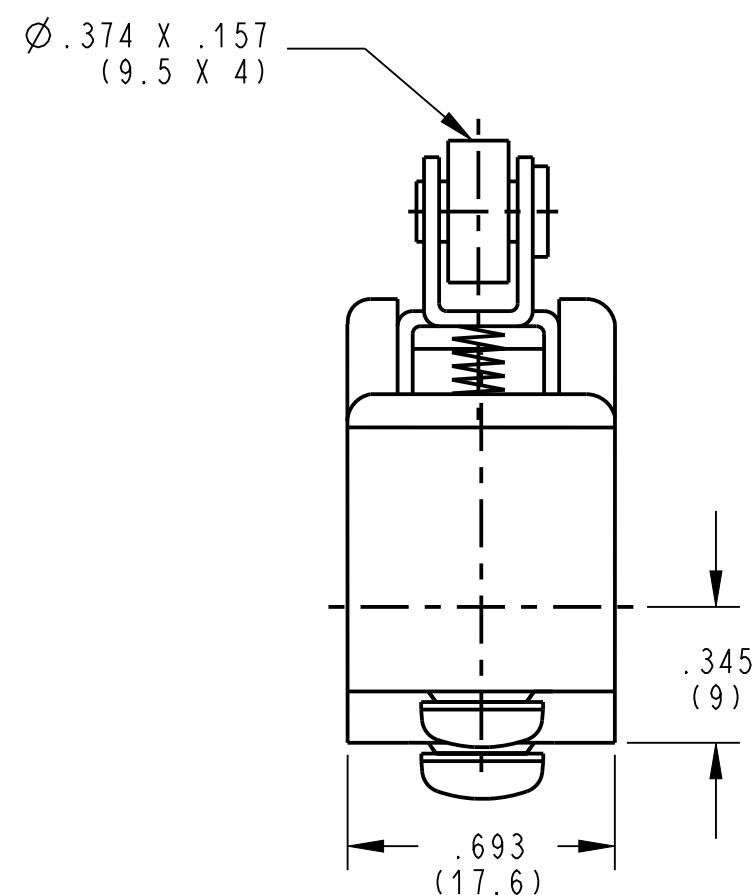


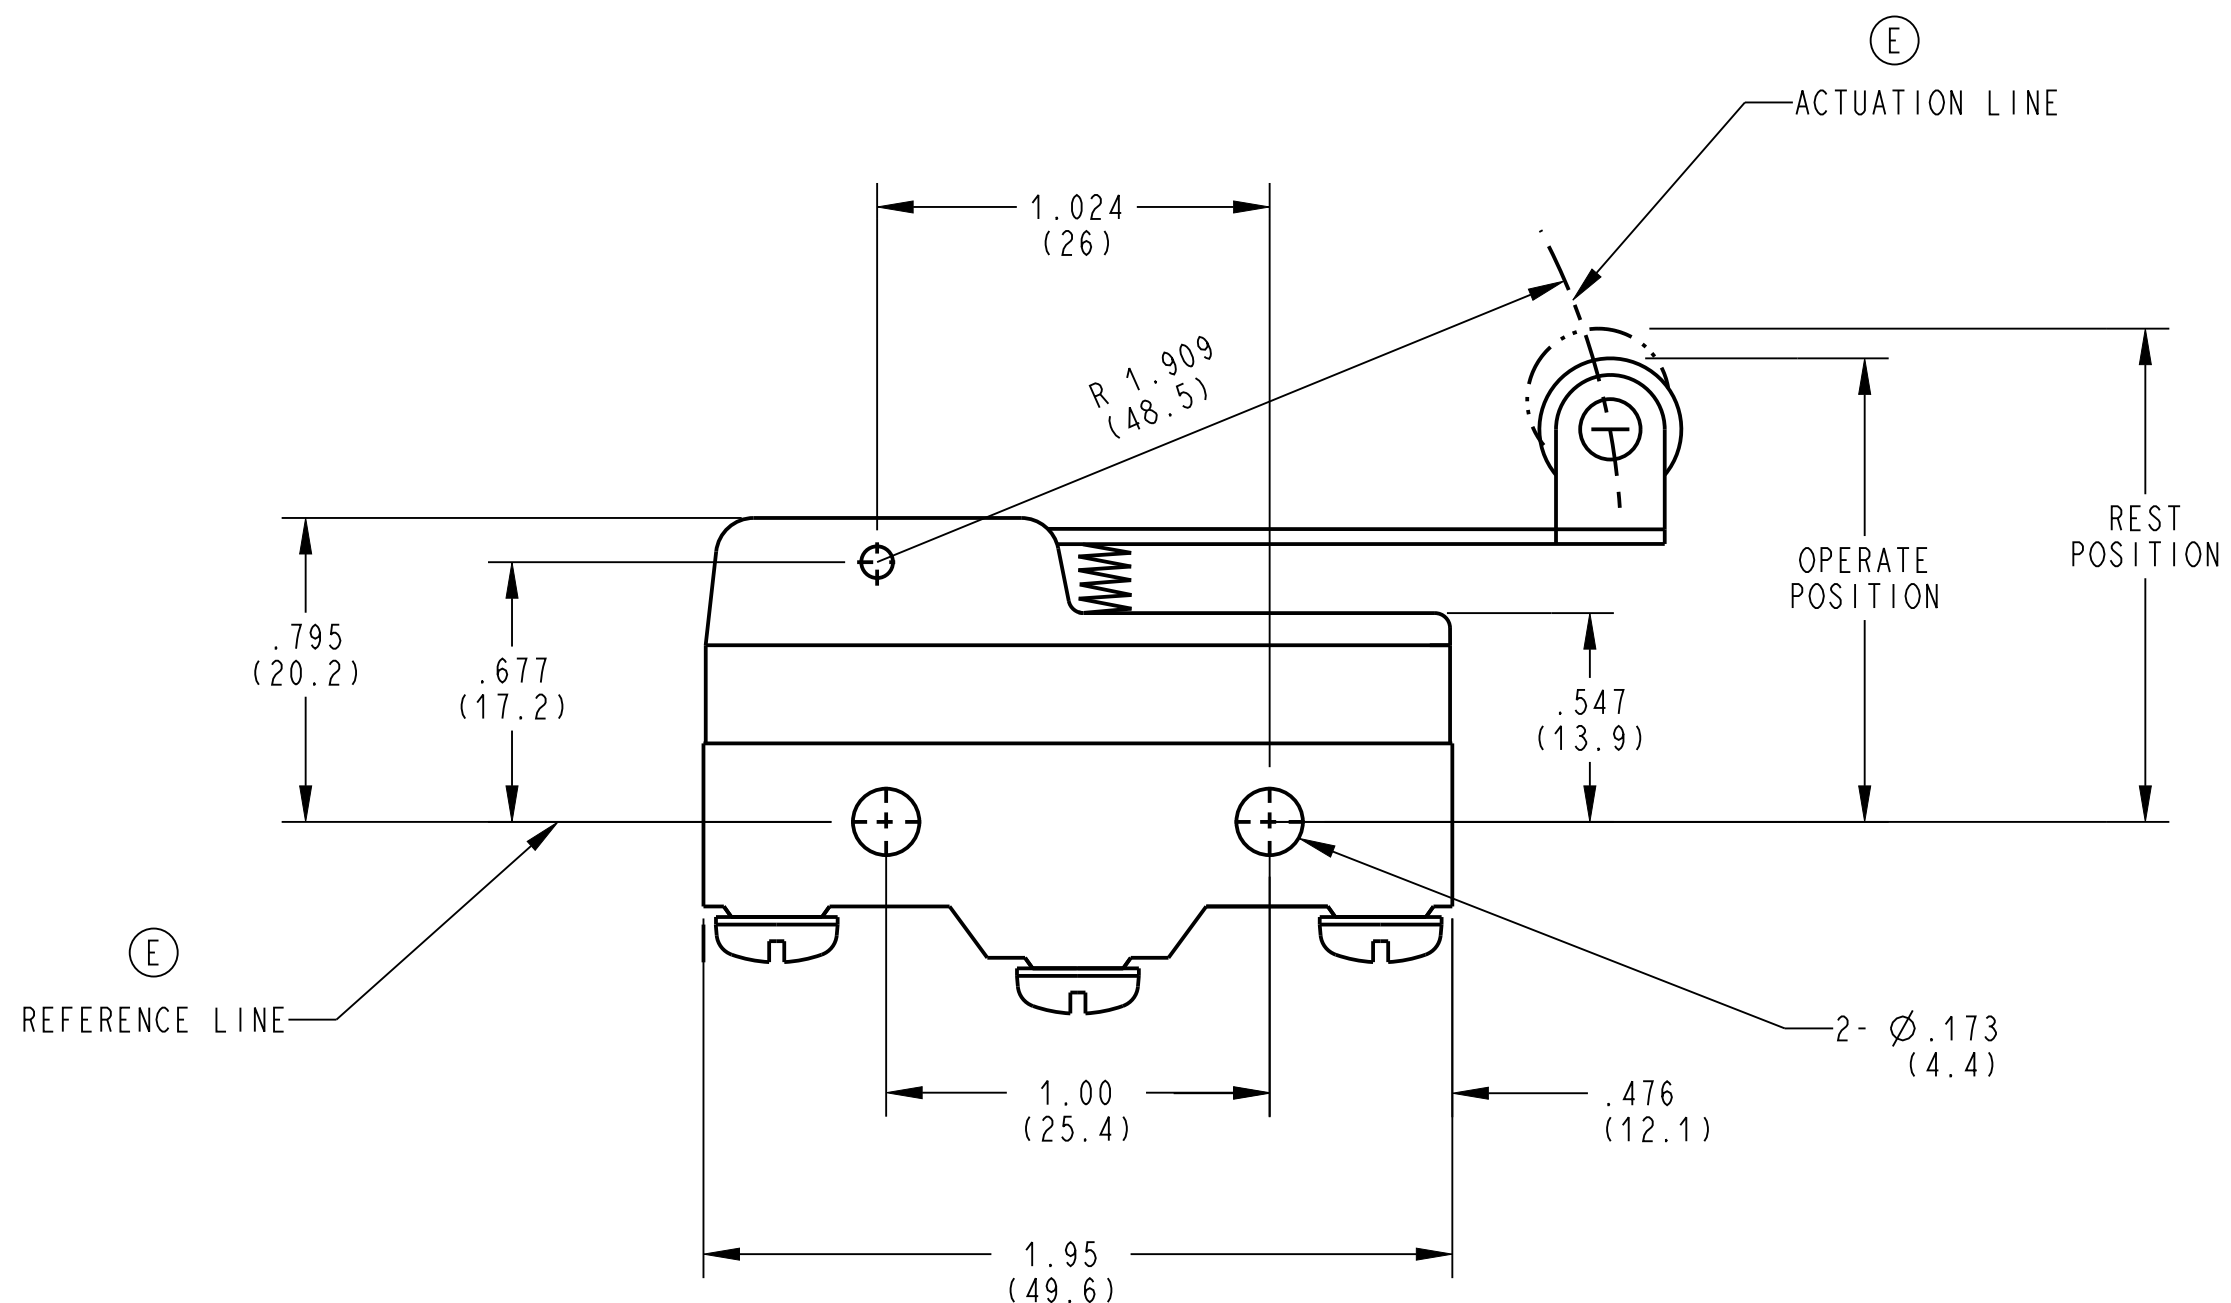


NOTES (UNLESS OTHERWISE SPECIFIED):

1. RECOMMENDED MOUNTING: M4 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
4. FOR MARKING AND NAMING SPECIFICATION SEE ES021295.

CHARACTERISTICS	
ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE) 5T40
TERMINAL	SCREW
OPER. FORCE MAX.	100 GMS
RELEASE FORCE MIN.	22 GMS
PRETRAVEL MAX.	.280 [7.1 mm]
OVERTRAVEL MIN.	.157 [4 mm]
MOVE. DIFF. MAX.	.040 [1.02 mm]
REST POSITION MAX.	1.437 (36.5 mm)
OPERATING POSITION	1.157 TO 1.575 [29.4 TO 40.0 mm]

DWN: JED
APVD: SB
DATE: 11-Aug-04

THIRD ANGLE PROJECTION



CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SWITCH

E	Z000360152	2016-04-21	GP	EL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	4000000138
--------------	------------

TOLERANCE UNLESS SPECIFIED	DWG UNITS	X.XX	X.XXX	ANGLES
	INCH	± 0.02	± 0.015	± 5 °

C	ITEM NO.	GPTCRS01
SCALE:	NOT TO SCALE	SH 1 OF 1

ORIGINAL ON PROJE