
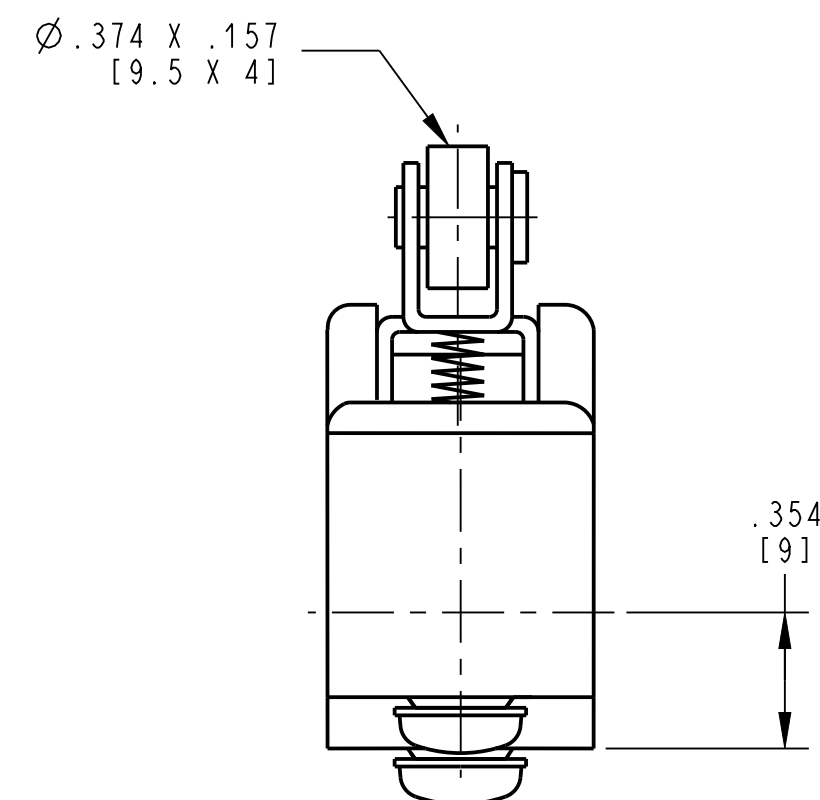


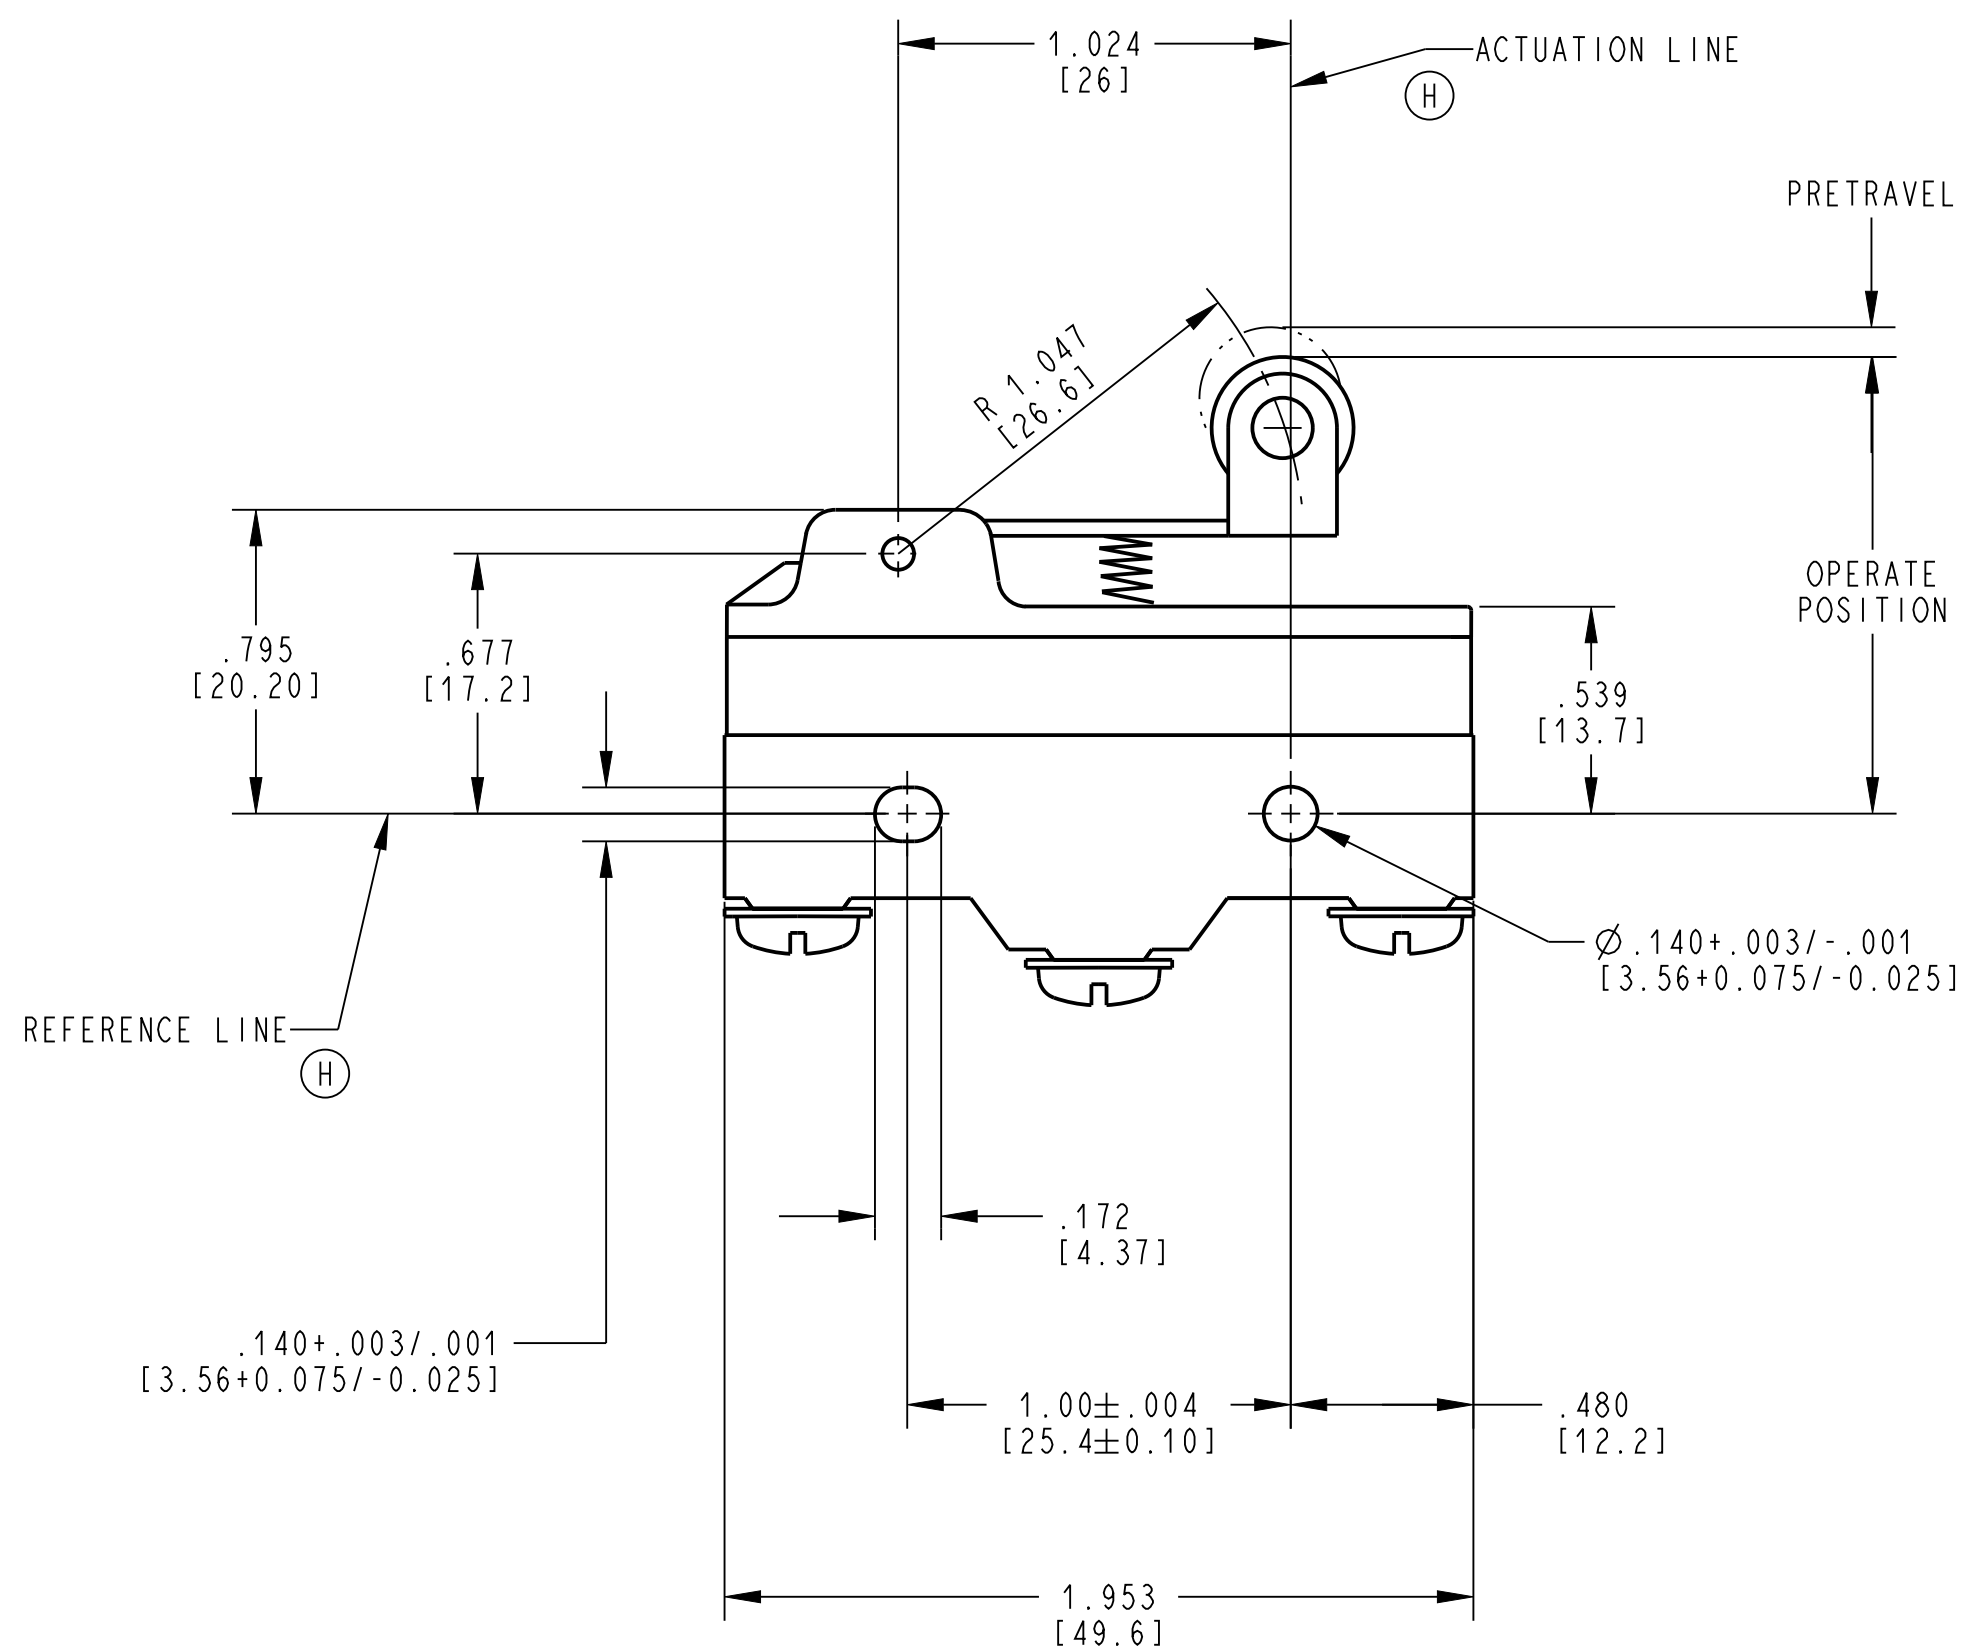


NOTES (UNLESS OTHERWISE SPECIFIED): (H)

- 1 RECOMMENDED MOUNTING:
#6-32 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
- 2 RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
- 3 ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED
FROM THE REFERENCE LINE.
- 4 FOR MARKING AND NAMING SPECIFICATIONS SEE ES021295.


CHARACTERISTICS (H)

ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE) -5T40
TERMINAL	SCREW
ROLLER	ACUMEN ACETAL F20-03
OPER. FORCE MAX.	160 GMS
RELEASE FORCE MIN.	42 GMS
PRETRAVEL MAX.	.106 [2.7 mm]
OVERTRAVEL MIN.	.094 [2.4 mm]
MOVE. DIFF. MAX.	.019 [0.5 mm]
REST POSITION MAX.	1.280 (32.5 mm)
OPERATING POSITION	1.173 TO 1.205 [29.8 TO 30.6 mm]

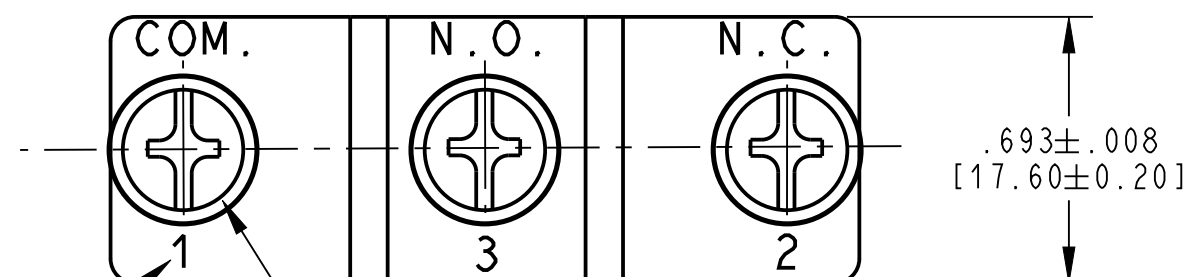

TERMINAL CALL-OUTS MAY
ALSO BE LISTED NUMERICALLY

3 - M4 X 4.9 mm
TERMINAL SCREW AND
INTERNAL TOOTHED
LOCK WASHER

DWN: JED		CONFIDENTIAL AND PROPRIETARY: ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THERE IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.				 ZF Electronic Systems	
APVD: SG							
DATE: 21-JUL-04							
THIRD ANGLE PROJECTION						PLEASANT PRAIRIE, WISCONSIN U.S.A.	
						NAME / DESCRIPTION	
		TOLERANCE UNLESS SPECIFIED				SPECIFICATION DRAWING	
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES	C	ITEM NO. GPTCRM11
4000000138	INCHES	± .02	± .015	± 5 °	SCALE: 2:1	SH 1	OF 1

ORIGINAL ON PROJE