

RATING: 20A 125VAC, 10A 250 VAC 

⑤ UL ENDURANCE RATING: 6000 CYCLES

INITIAL CONTACT RESISTANCE: 50m  $\Omega$  (MAX)





INSULATION RESISTANCE: 500VDC 100 M $\Omega$  (MIN)

DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF: IP56 CAPABLE

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS  
UNDER THE COMPONENT RECOGNITION PROGRAM  
OF UNDERWRITERS LABORATORIES, INC. (AC ONLY)

DATE CODE FORMAT: YYWW

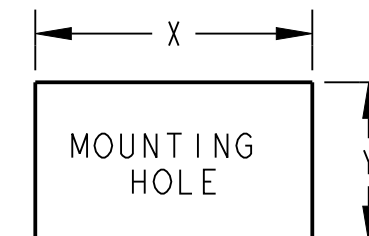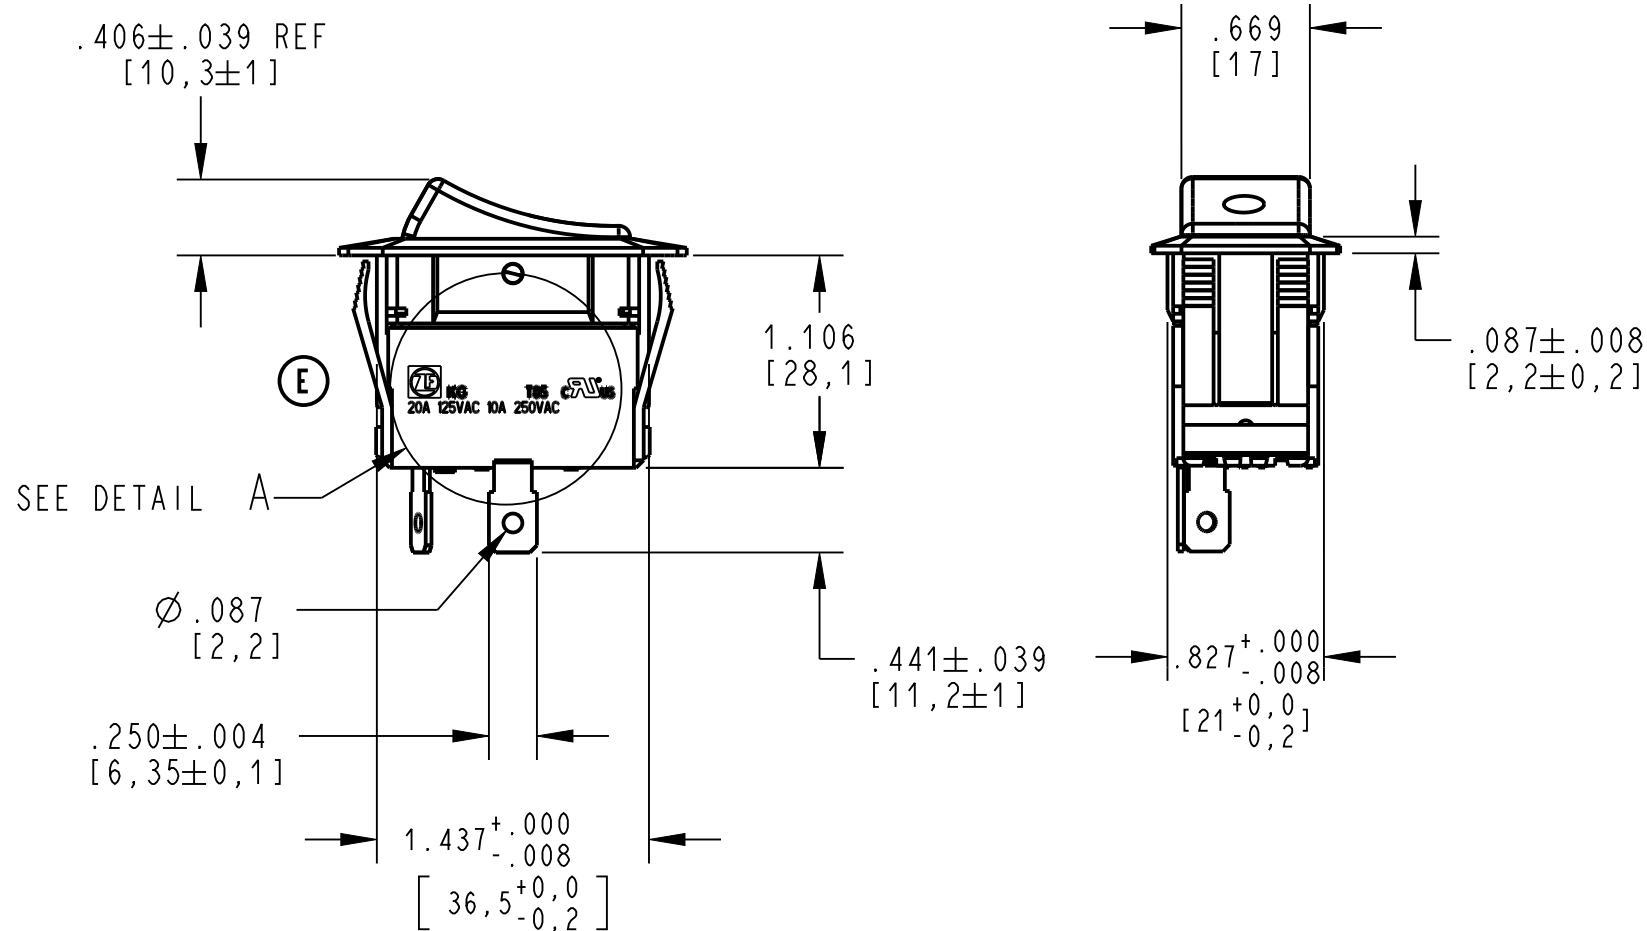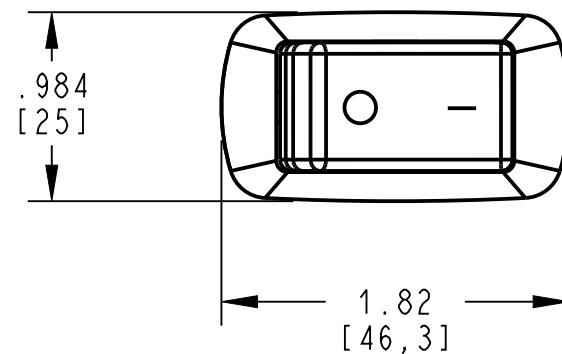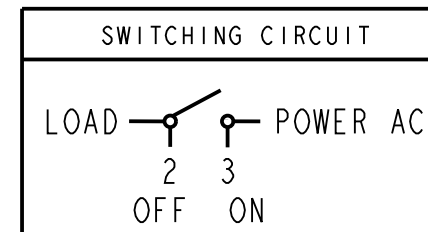

Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0.75 TO 1.25]	1.441.008/-0.000 [36.6+0.2/-0.0]	.835+.004/-0.000 [21.2+0.1/-0.0]
.049 TO .079 [1.25 TO 2.00]	1.449+.008/-0.000 [36.8+0.2/-0.0]	.835+.004/-0.000 [21.2+0.1/-0.0]
.079 TO .118 [2.00 TO 3.00]	1.457+.008/-0.000 [37.0+0.2/-0.0]	.835+.004/-0.000 [21.2+0.1/-0.0]



DETAIL A  
SCALE 2:1

E	Z000374406	19-Aug-16	GP	EL
REV	ECO NO.	DATE	PREP	APVD

DWN: J DOLNIK  
APVD: JR  
DATE: 4-JUN-08

THIRD ANGLE PROJECTION



PROJECT/ CSR  
4000000138

CONFIDENTIAL AND PROPRIETARY:  
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS  
DOCUMENT OR DERIVED FROM THE INFORMATION THERE  
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS  
CONFIDENTIAL AND PROPRIETARY. REVIEW OR  
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT  
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE  
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY  
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN  
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC  
SYSTEMS.

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.012	± 5 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME/ DESCRIPTION

KG-SPST ON-OFF NON-LIGHTED

B ITEM NO. KGC2ANB1BBD

SCALE: 1:1 SH 1 OF 1