
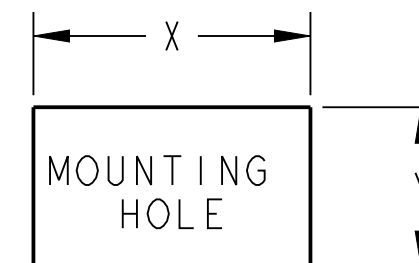




- RATING: 20A 125VAC, 10A 250 VAC 
- (E) UL ENDURANCE RATING: 6000 CYCLES
- INITIAL CONTACT RESISTANCE: 50m Ω (MAX)
- (E) INSULATION RESISTANCE: 500VDC 100 M Ω (MIN)
- DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.
- WATERPROOF: IP56 CAPABLE
- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC. (AC ONLY)

DATE CODE FORMAT: YYWW



Z = PANEL THICKNESS

| DIM. Z | DIM. X | DIM. Y |
|--------------------------------|--------------------------------------|-------------------------------------|
| .030 TO .049 [0.75 TO 1.25] | 1.441+.008/- .000 [36.6+0.2/-0.0] | .835+.004/- .000 [21.2+0.1/-0.0] |
| .049 TO .079 [1.25 TO 2.00] | 1.449+.008/- .000 [36.8+0.2/-0.0] | .835+.004/- .000 [21.2+0.1/-0.0] |
| .079 TO .118 [2.00 TO 3.00] | 1.457+.008/- .000 [37.0+0.2/-0.0] | .835+.004/- .000 [21.2+0.1/-0.0] |

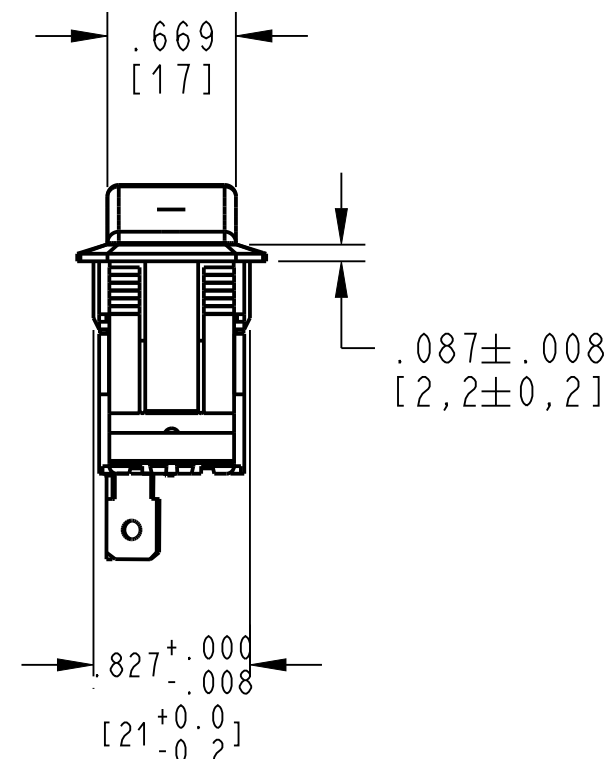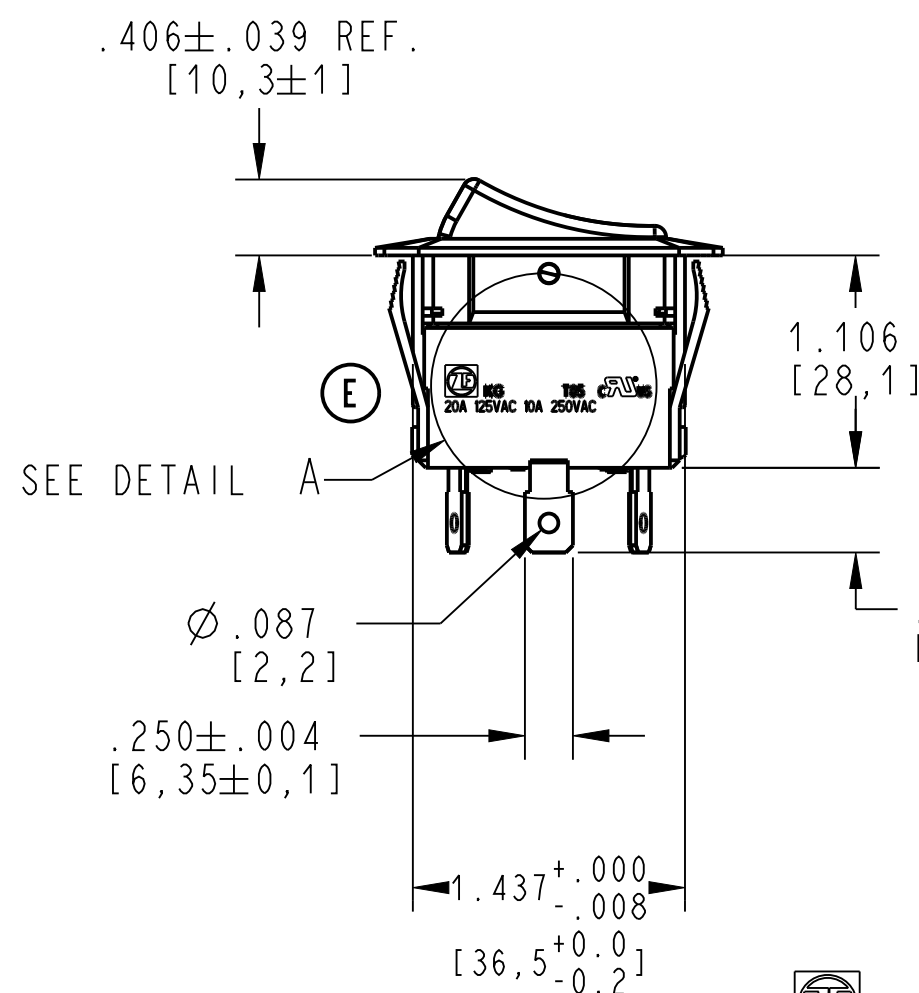


(E)  **KG** **T85** 
20A 125VAC 10A 250VAC

DETAIL A
SCALE 2:1

DWN: J DOLNIK
APVD: JR
DATE: 04-Jun-08

THIRD ANGLE PROJECTION



PROJECT/ CSR

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KGSPDT ON-OFF NON-LIGHTED

B ITEM NO. **KGC2CNB1BBN**

SCALE: 1:1 SH 1 OF 1

| | | | | |
|-----|------------|-----------|------|------|
| E | Z000374406 | 19-Aug-16 | GP | EL |
| REV | ECO NO. | DATE | PREP | APVD |

| TOLERANCE UNLESS SPECIFIED | | | |
|----------------------------|--------|---------|--------|
| DWG UNITS | X.XX | X.XXX | ANGLES |
| INCH | ± 0.02 | ± 0.012 | ± 5 ° |