
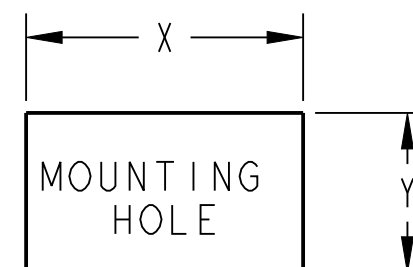


- RATING: 20A 125VAC, 10A 250 VAC
- ⓔ UL ENDURANCE RATING: 6000 CYCLES
- INITIAL CONTACT RESISTANCE: 50m Ω (MAX)
- INSULATION RESISTANCE: 500VDC 100 M Ω (MIN)
- ⓔ DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.
- WATERPROOF: IP56 CAPABLE



RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC. (AC ONLY)

DATE CODE FORMAT: YYWW

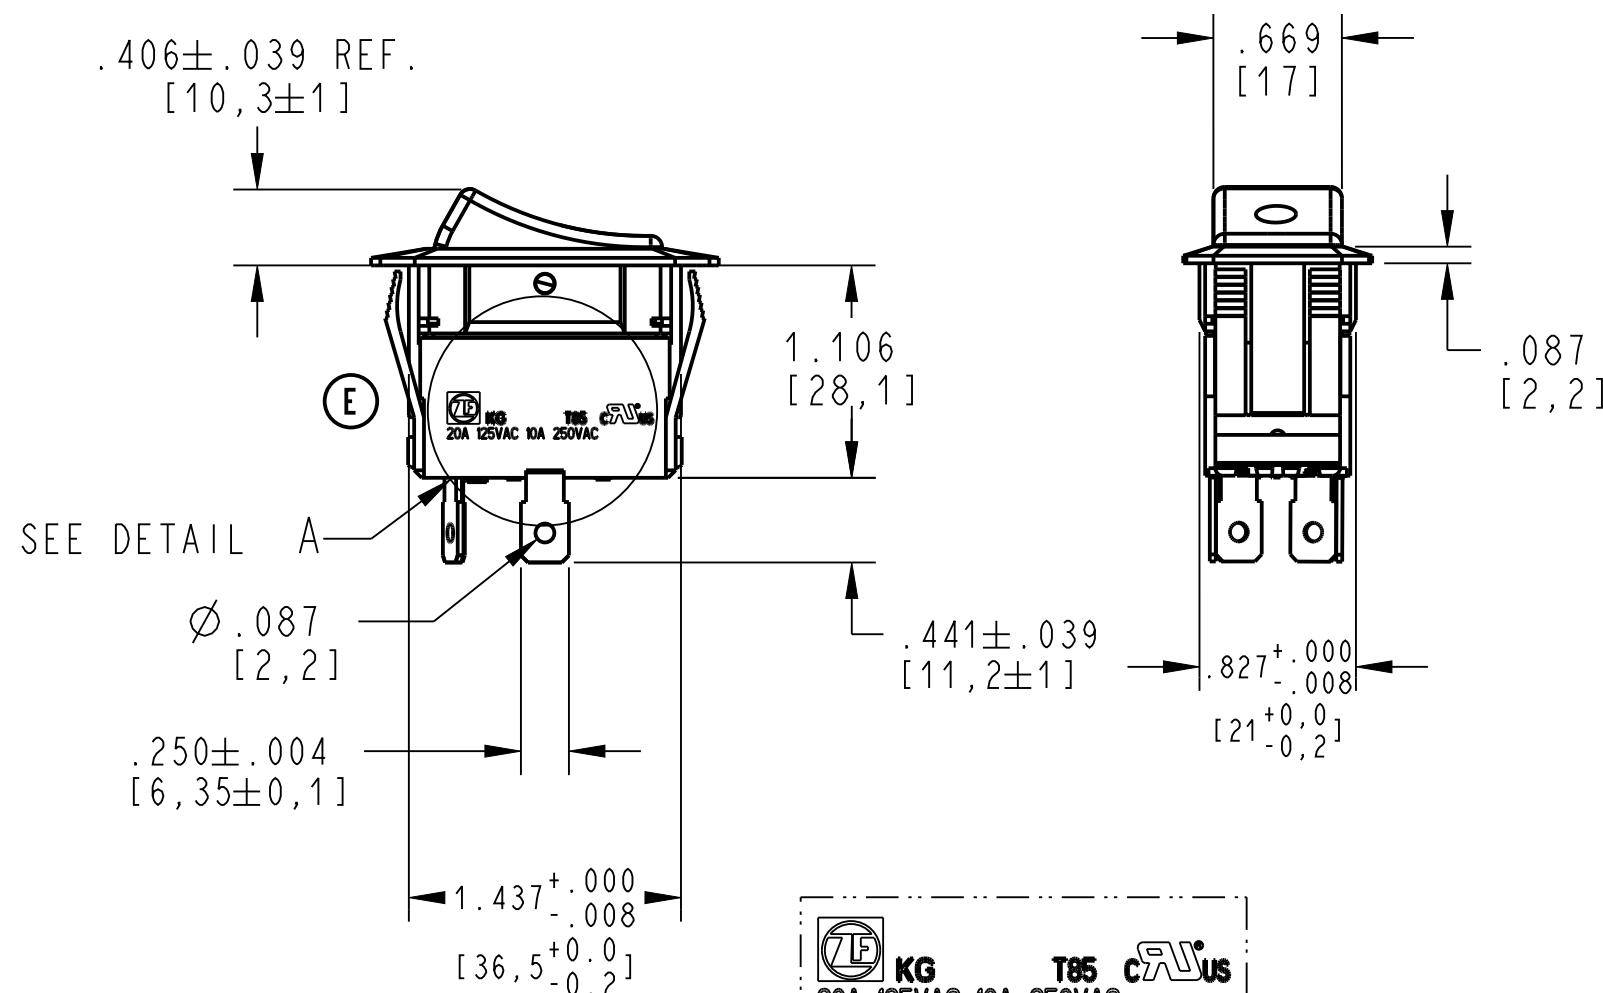

Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0.75 TO 1.25]	1.441+.008/- .000 [36.6+0.2/-0.0]	.835+.004/- .000 [21.2+0.1/-0.0]
.049 TO .079 [1.25 TO 2.00]	1.449+.008/- .000 [36.8+0.2/-0.0]	.835+.004/- .000 [21.2+0.1/-0.0]
.079 TO .118 [2.00 TO 3.00]	1.457+.008/- .000 [37.0+0.2/-0.0]	.835+.004/- .000 [21.2+0.1/-0.0]

DWN: J DOLNIK		<div>CONFIDENTIAL AND PROPRIETARY: ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THEREIN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.</div>				<div><div></div><div>ZF Electronic Systems</div></div>		
APVD: JR						PLEASANT PRAIRIE, WISCONSIN U.S.A.		
DATE: 04-JUN-08						NAME / DESCRIPTION		
THIRD ANGLE PROJECTION		<div></div>				KG-DPST ON-OFF NON-LIGHTED		
PROJECT/ CSR		TOLERANCE UNLESS SPECIFIED				B	ITEM NO. KGC3ANB1BBD	
DWG UNITS		X.XX	X.XXX	ANGLES				
4000000138		INCH	± 0.02	± 0.012	± 5 °	SCALE: 1:1		SH 1 OF 1

E	Z000374406	19-Aug-16	GP	EL
REV	ECO NO.	DATE	PREP	APVD