
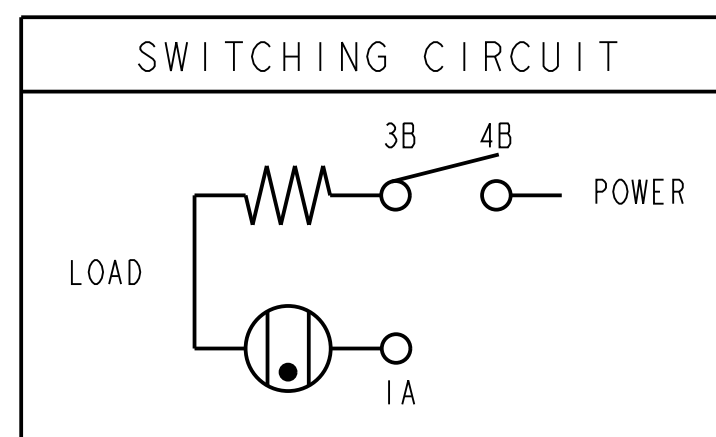


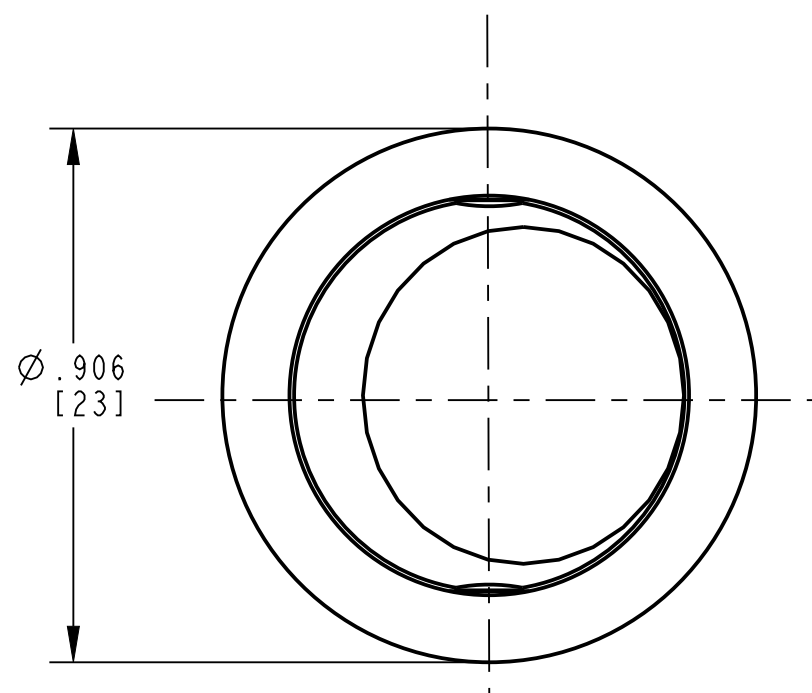

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RATING TO BE MARKED ON ROCKER:

10A 125VAC  
8A 250VAC  
1/4HP 125/250VAC

CE 10(4)A 250V~T125/55 10E3

c 12(4)A 125/250V~




2. INITIAL CONTACT RESISTANCE: 20m  $\Omega$  (MAX.)

3. INSULATION RESISTANCE: 100M  $\Omega$  MIN. AT 500VDC.


4. DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

5. TERMINALS (3): .185+.004/- .002 [4,7+0,1/-0,05]  
X .031 $\pm$ .001 [0,8 $\pm$ 0,03].

6. ILLUMINATED: 100~125VAC.

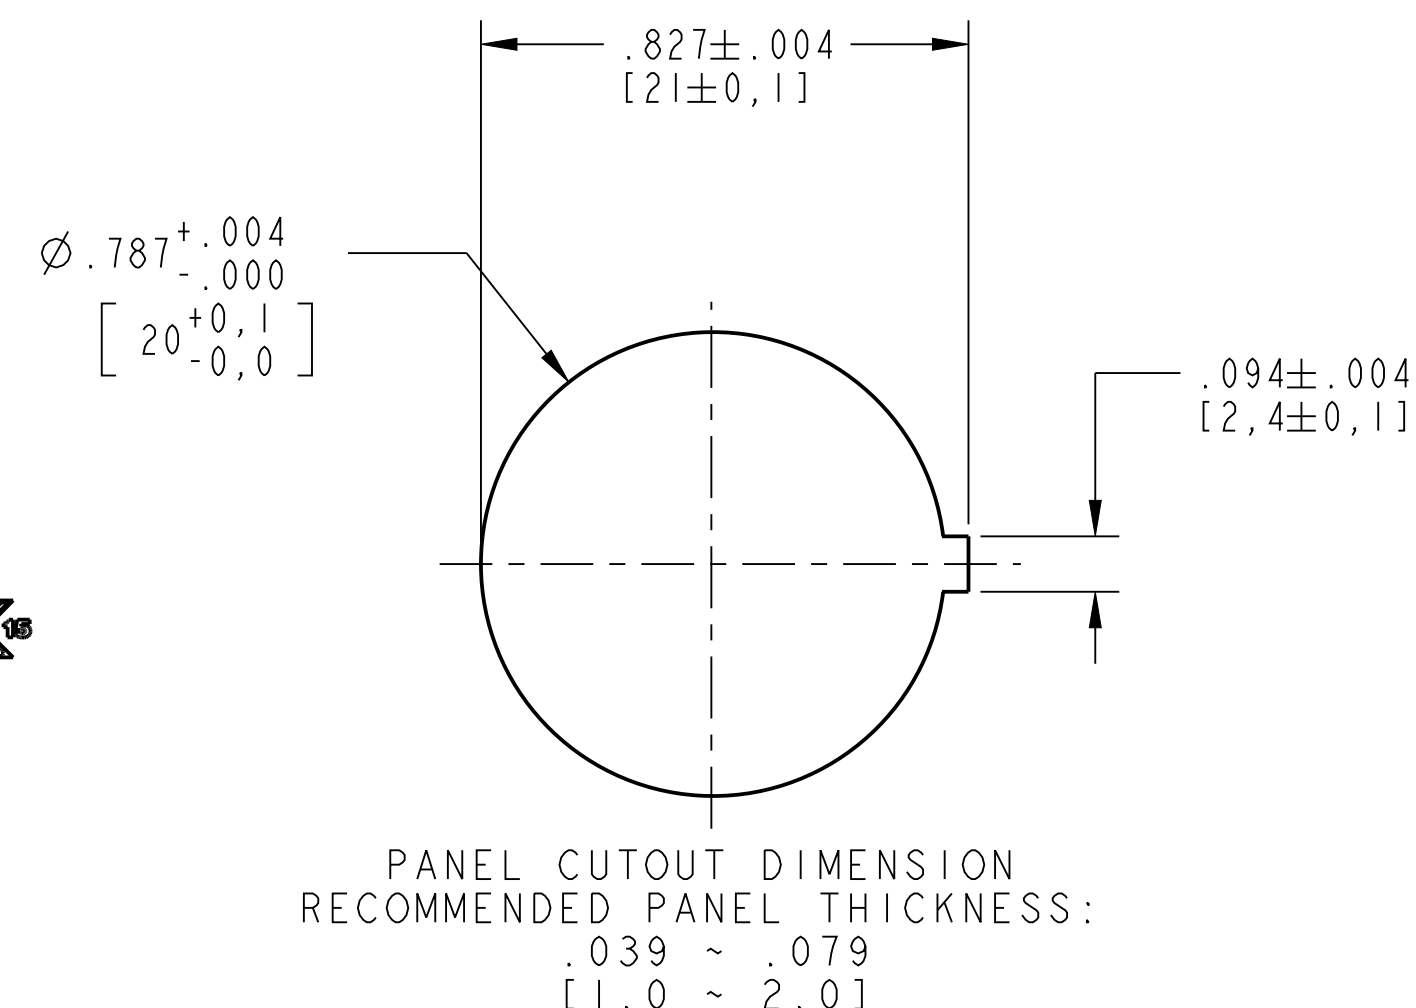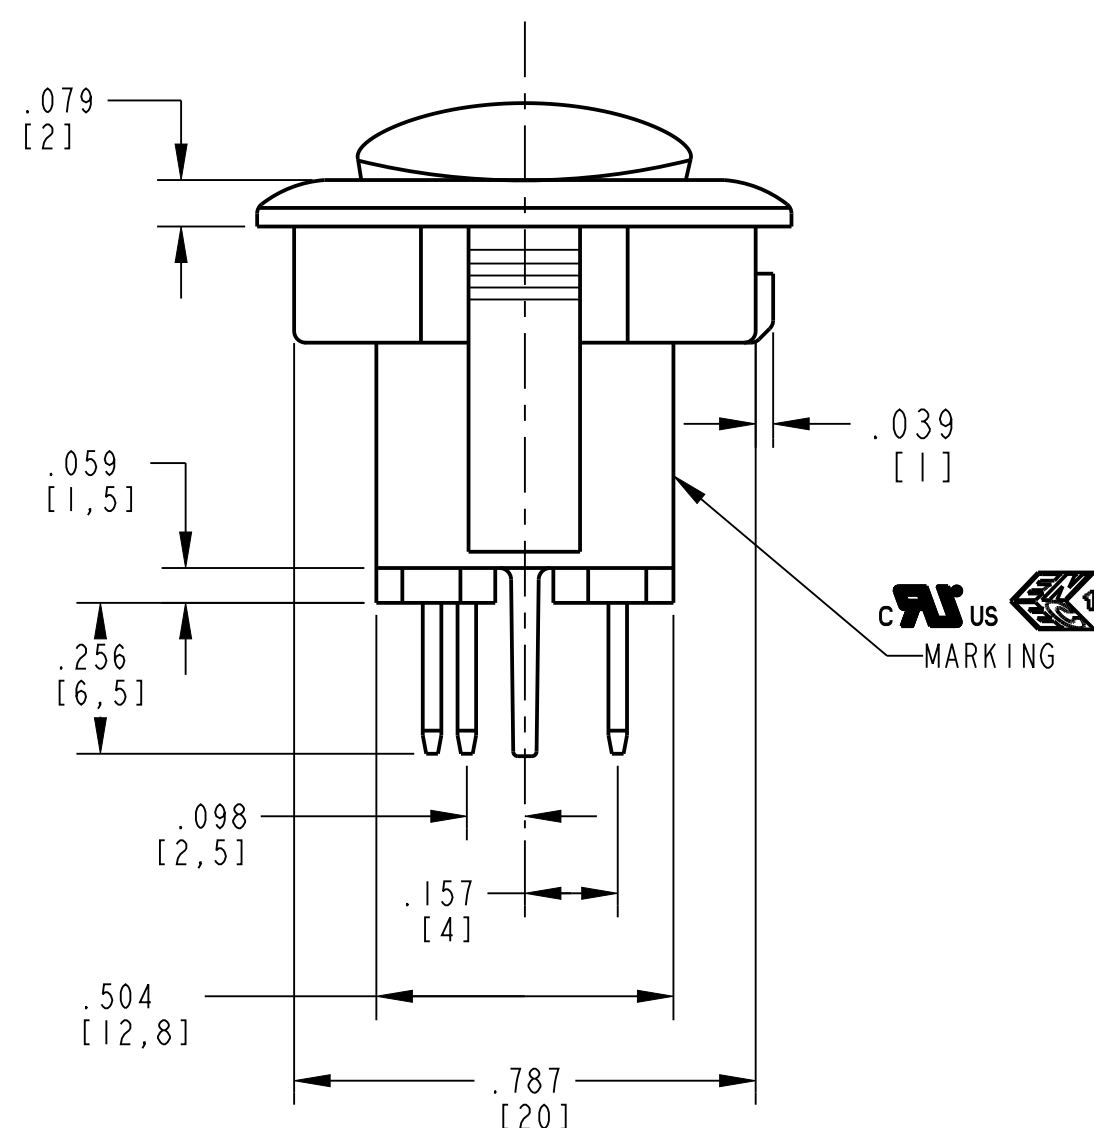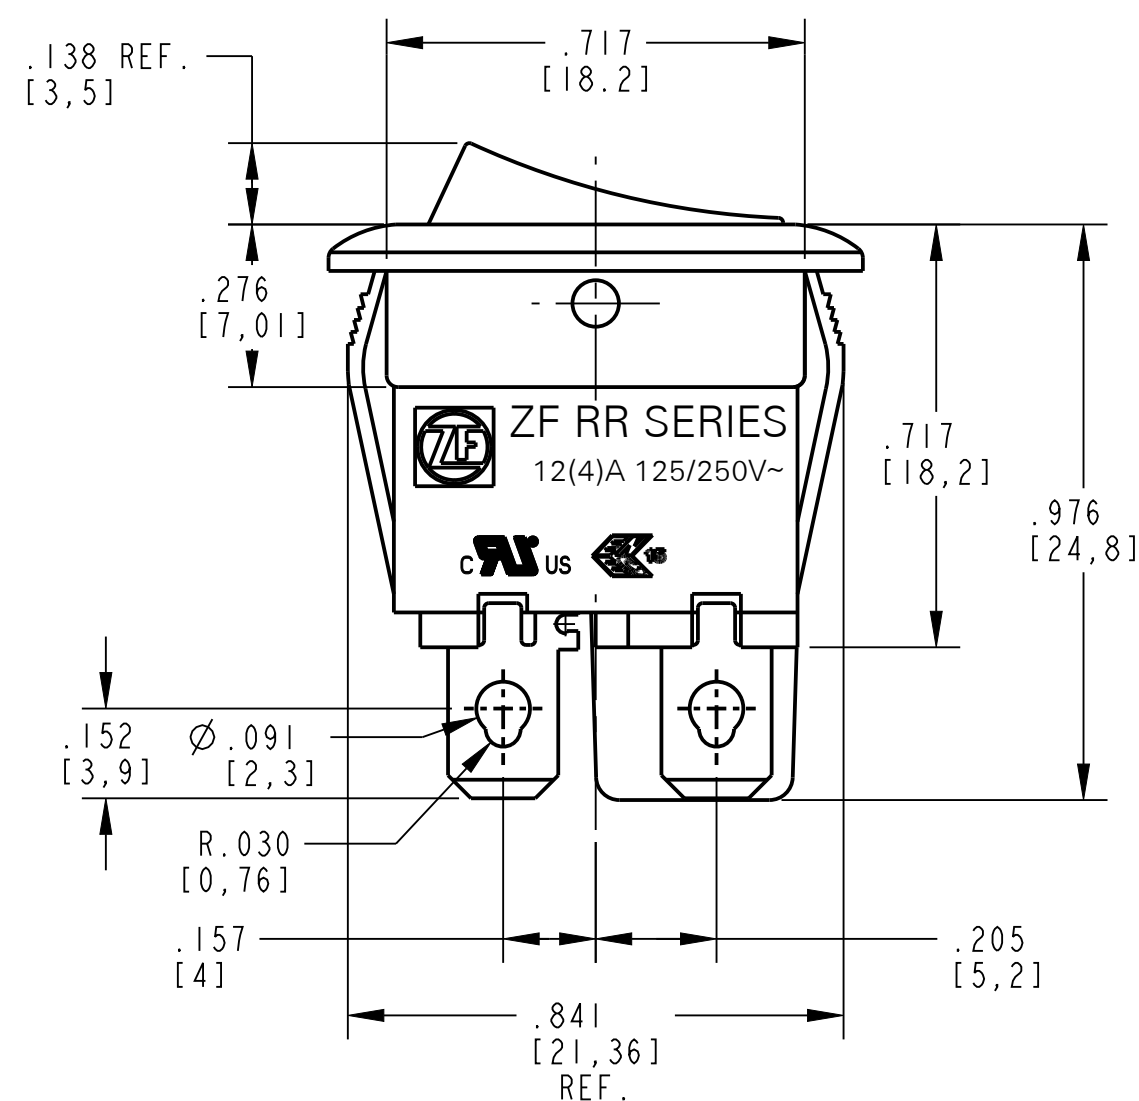

DWN: TLM  
APVD: SG  
DATE: 03-Jul-03  
THIRD ANGLE PROJECTION



CONFIDENTIAL AND PROPRIETARY:  
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS  
DOCUMENT OR DERIVED FROM THE INFORMATION THERE  
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS  
CONFIDENTIAL AND PROPRIETARY. REVIEW OR  
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT  
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE  
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY  
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN  
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC  
SYSTEMS.



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

|     |           |            |      |      |
|-----|-----------|------------|------|------|
| A   | Z00000000 | 05-08-2023 | ELL  | ELL  |
| REV | ECO NO.   | DATE       | PREP | APVD |

|              |           |            |             |             |
|--------------|-----------|------------|-------------|-------------|
| PROJECT/ CSR | DWG UNITS | X.XX       | X.XXX       | ANGLES      |
| N/A          | INCHES    | $\pm$ 0.02 | $\pm$ 0.012 | $\pm$ 5.0 ° |

|        |          |               |
|--------|----------|---------------|
| C      | ITEM NO. | RR A22H3BBALN |
| SCALE: | 3:1      | SH 1 OF 1     |

ORIGINAL ON PRO/E