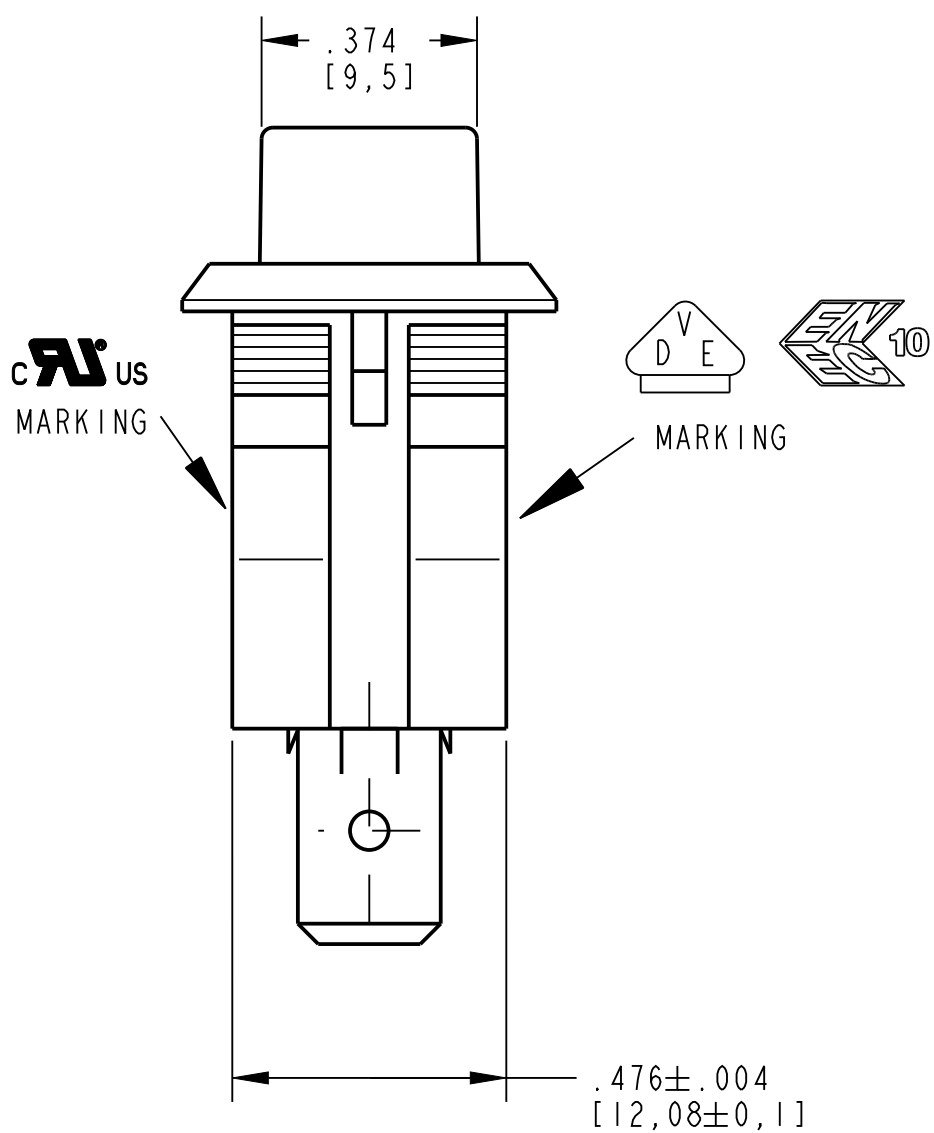
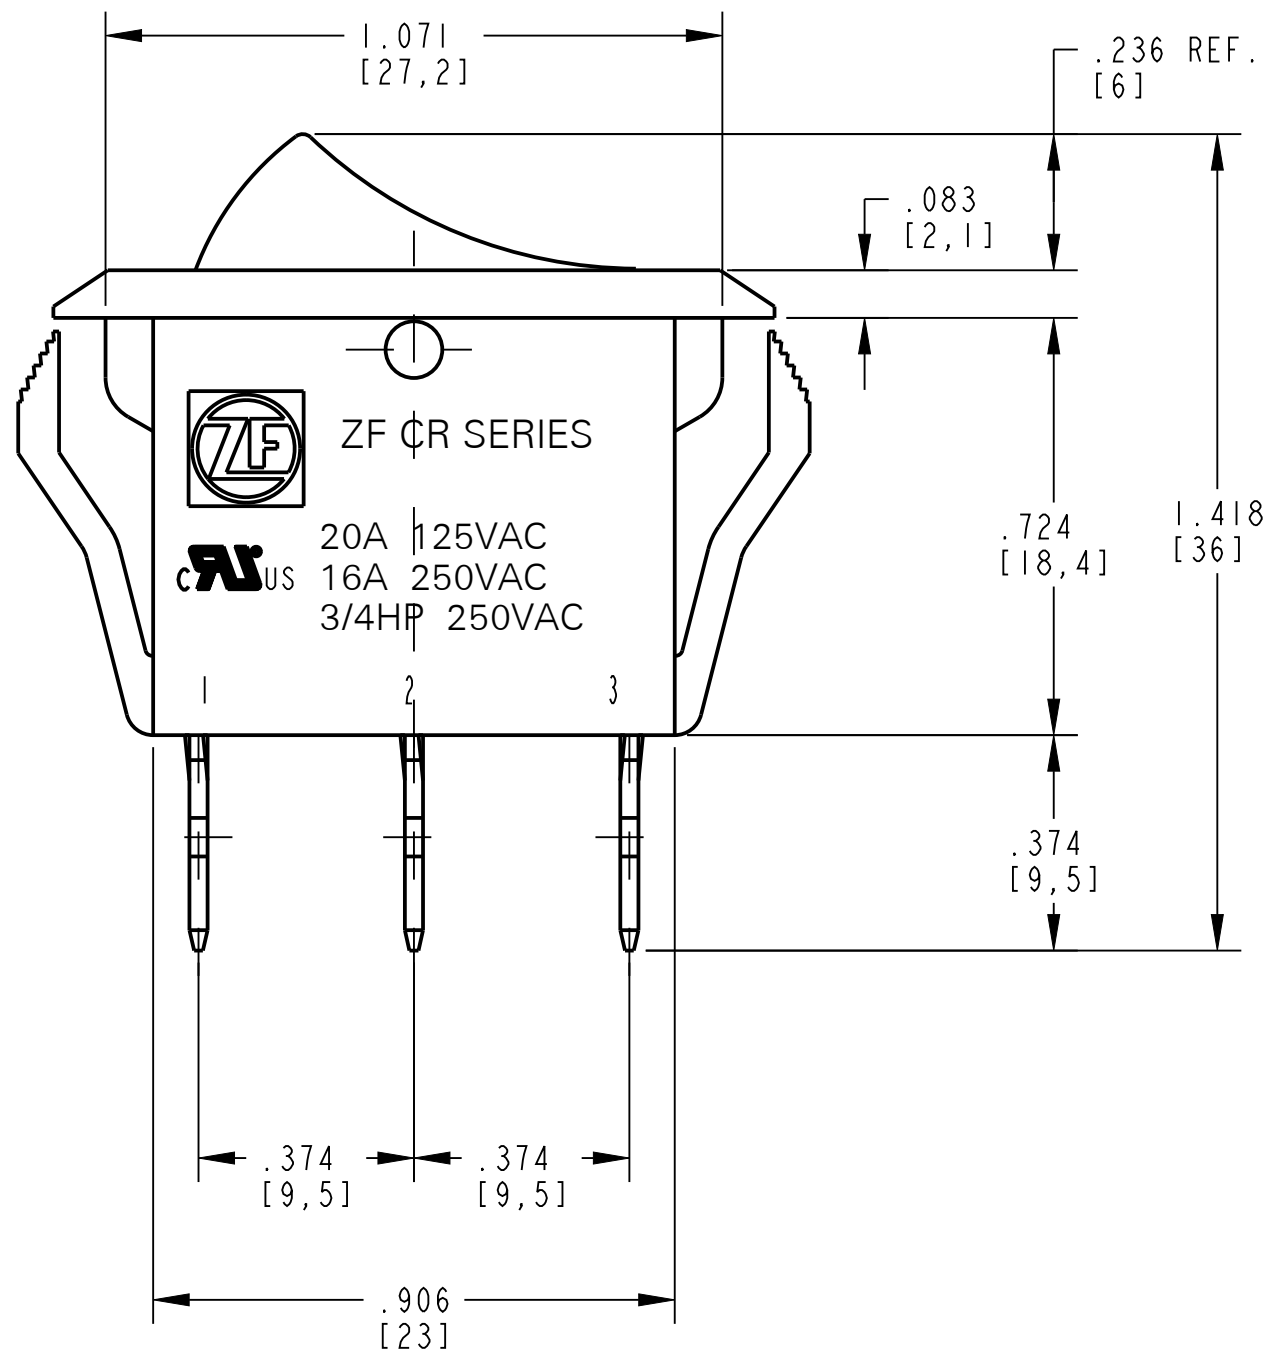
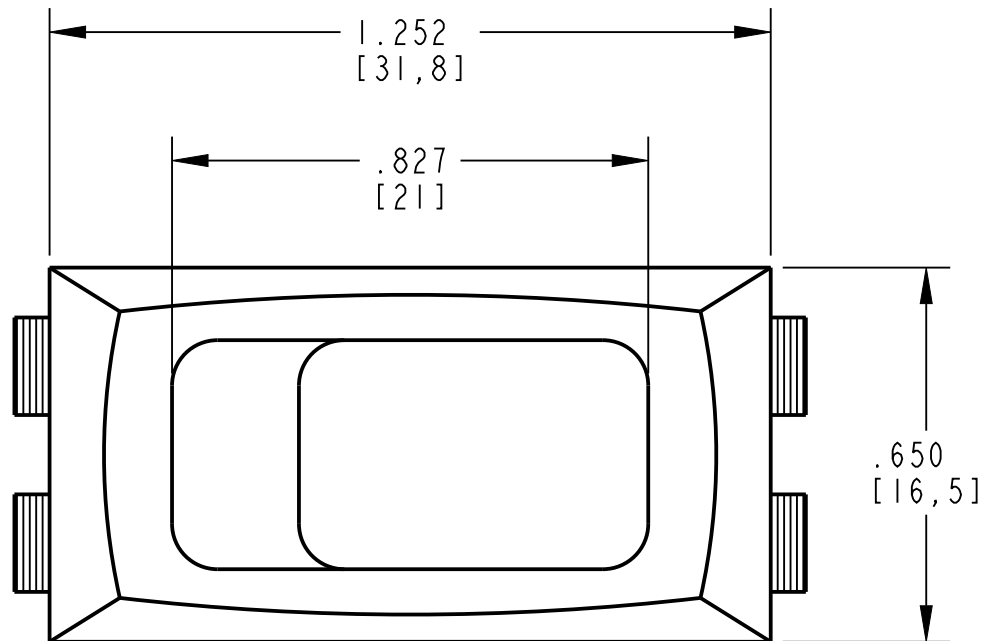




RECOMMENDED PANEL THICKNESS
.030 TO .049
[.75mm TO 1.25mm]



NOTES (UNLESS OTHERWISE SPECIFIED):

- RATING TO BE MARKED ON HOUSING:
20A 125 VAC
16A, 250 VAC
3/4 HP 250 VAC
16(4)A 250V ~ T125/55
- WITHSTAND VOLTAGE: 1000 VAC FOR 1 MINUTE
- INSULATION RESISTANCE: 100MΩ MIN. AT 500 VDC.
- INITIAL CONTACT RESISTANCE: 20mΩ MAX.
- ACTUATOR COLOR: RED
HOUSING COLOR: BLACK
- TERMINALS (3): QUICK CONNECT,
.250 [6.3] WIDE x .031 [0.8] THICK, HOLE DIAMETER .067 [1.7].
- NEON BULB ILLUMINATION: 100~125 VAC.
- FOR NAMING AND MARKING SPECIFICATIONS SEE ES021255.
- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWITERS LABORATORIES, INC.

DWN: ELL		<div>CONFIDENTIAL AND PROPRIETARY: ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THERE IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.</div>				<div> ZF Electronic Systems</div> <div>PLEASANT PRAIRIE, WISCONSIN U.S.A.</div>									
APVD: ELL						NAME / DESCRIPTION <div>SPEC DRAWING</div>									
DATE: 2025-08-14															
THIRD ANGLE PROJECTION <div></div>															
PROJECT/ CSR		TOLERANCE UNLESS SPECIFIED				C	ITEM NO. CRE22F2BBRLE								
N/A		DWG UNITS	X.XX	X.XXX	ANGLES										
REV		ECO NO.	DATE	PREP	APVD	INCH	± 0.02	± 0.012	± 5 °	SCALE:	3:1	SH	1	OF	1