



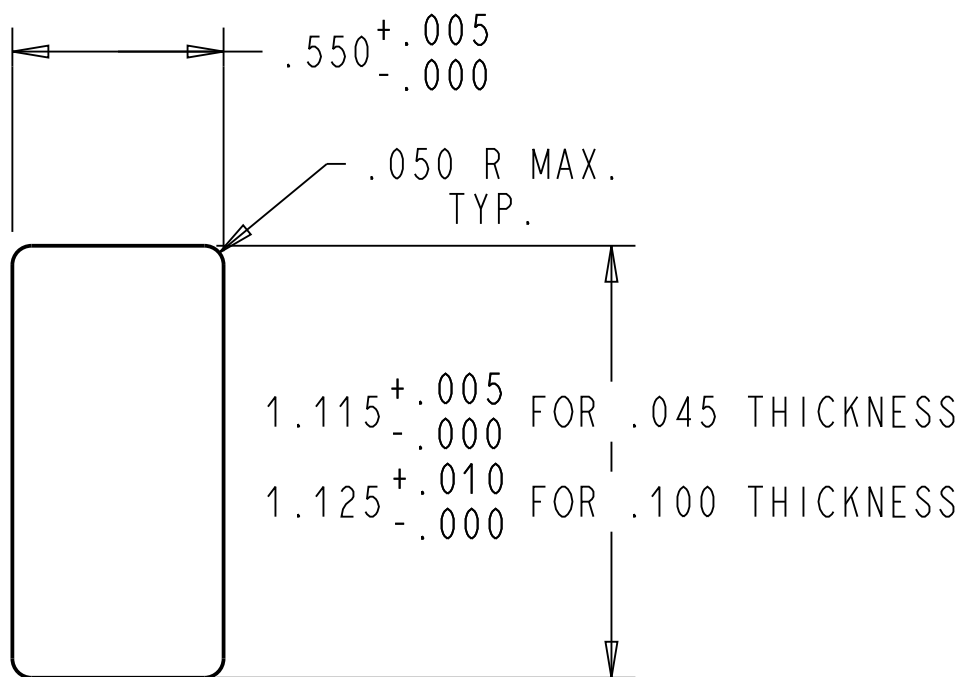

PANEL CUTOUT DETAIL
RECOMMENDED
PANEL THICKNESS
.045-.100

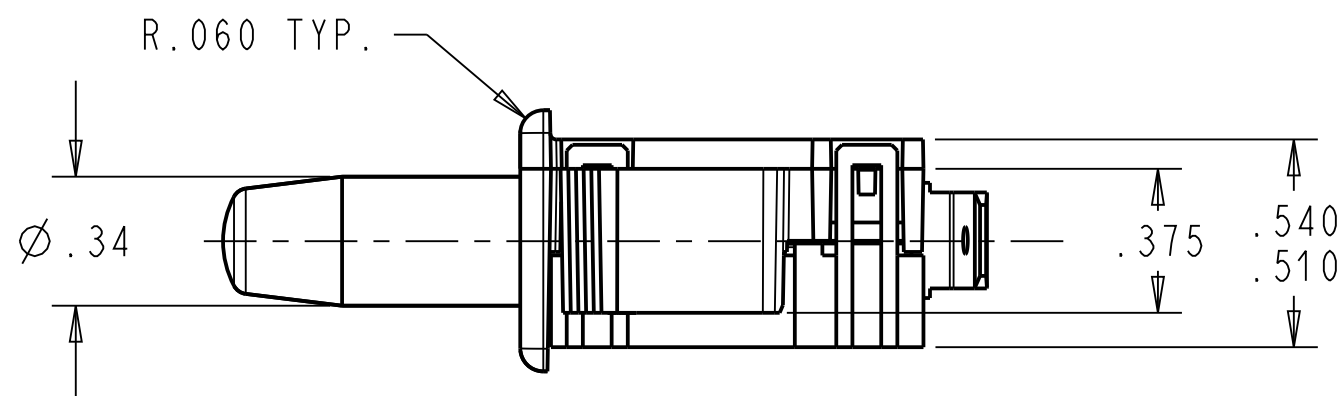

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. SWITCH CHARACTERISTICS:

REST POSITION .815 TO .875
PRETRAVEL: .125 MAX.
OPERATING POSITION .720 TO .820
OVER-TRAVEL: .375 MIN.
MOVEMENT DIFFERENTIAL: .045 MAX.
OPERATING FORCE grams: 708 MAX.

BUTTON POSITION
AT FULL OVERTRAVEL. .358 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
LINE AND MEASURED FROM THE REFERENCE LINE.

2. **UL** ELECTRICAL RATING:

16 A, 125/250 VAC
1/3HP, 125/250 VAC




3. TERMINALS:

ARE .250 WIDTH x .032 THICKNESS.


4. RECOGNIZED TO U.S. AND CANADIAN
REQUIREMENTS UNDER THE COMPONENT
RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.

5. TEMPERATURE RATINGS: -40°C TO +85°C.

6. PLUNGER AND HOUSING COLOR: WHITE.

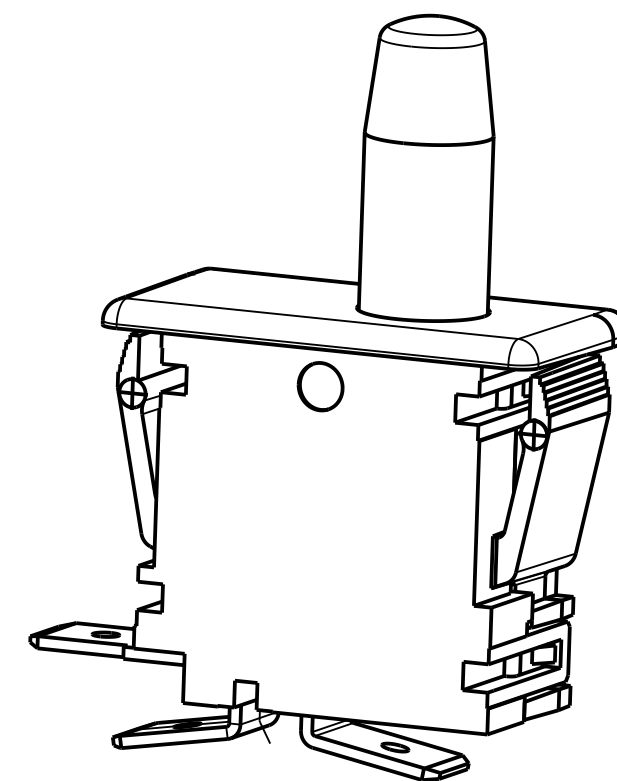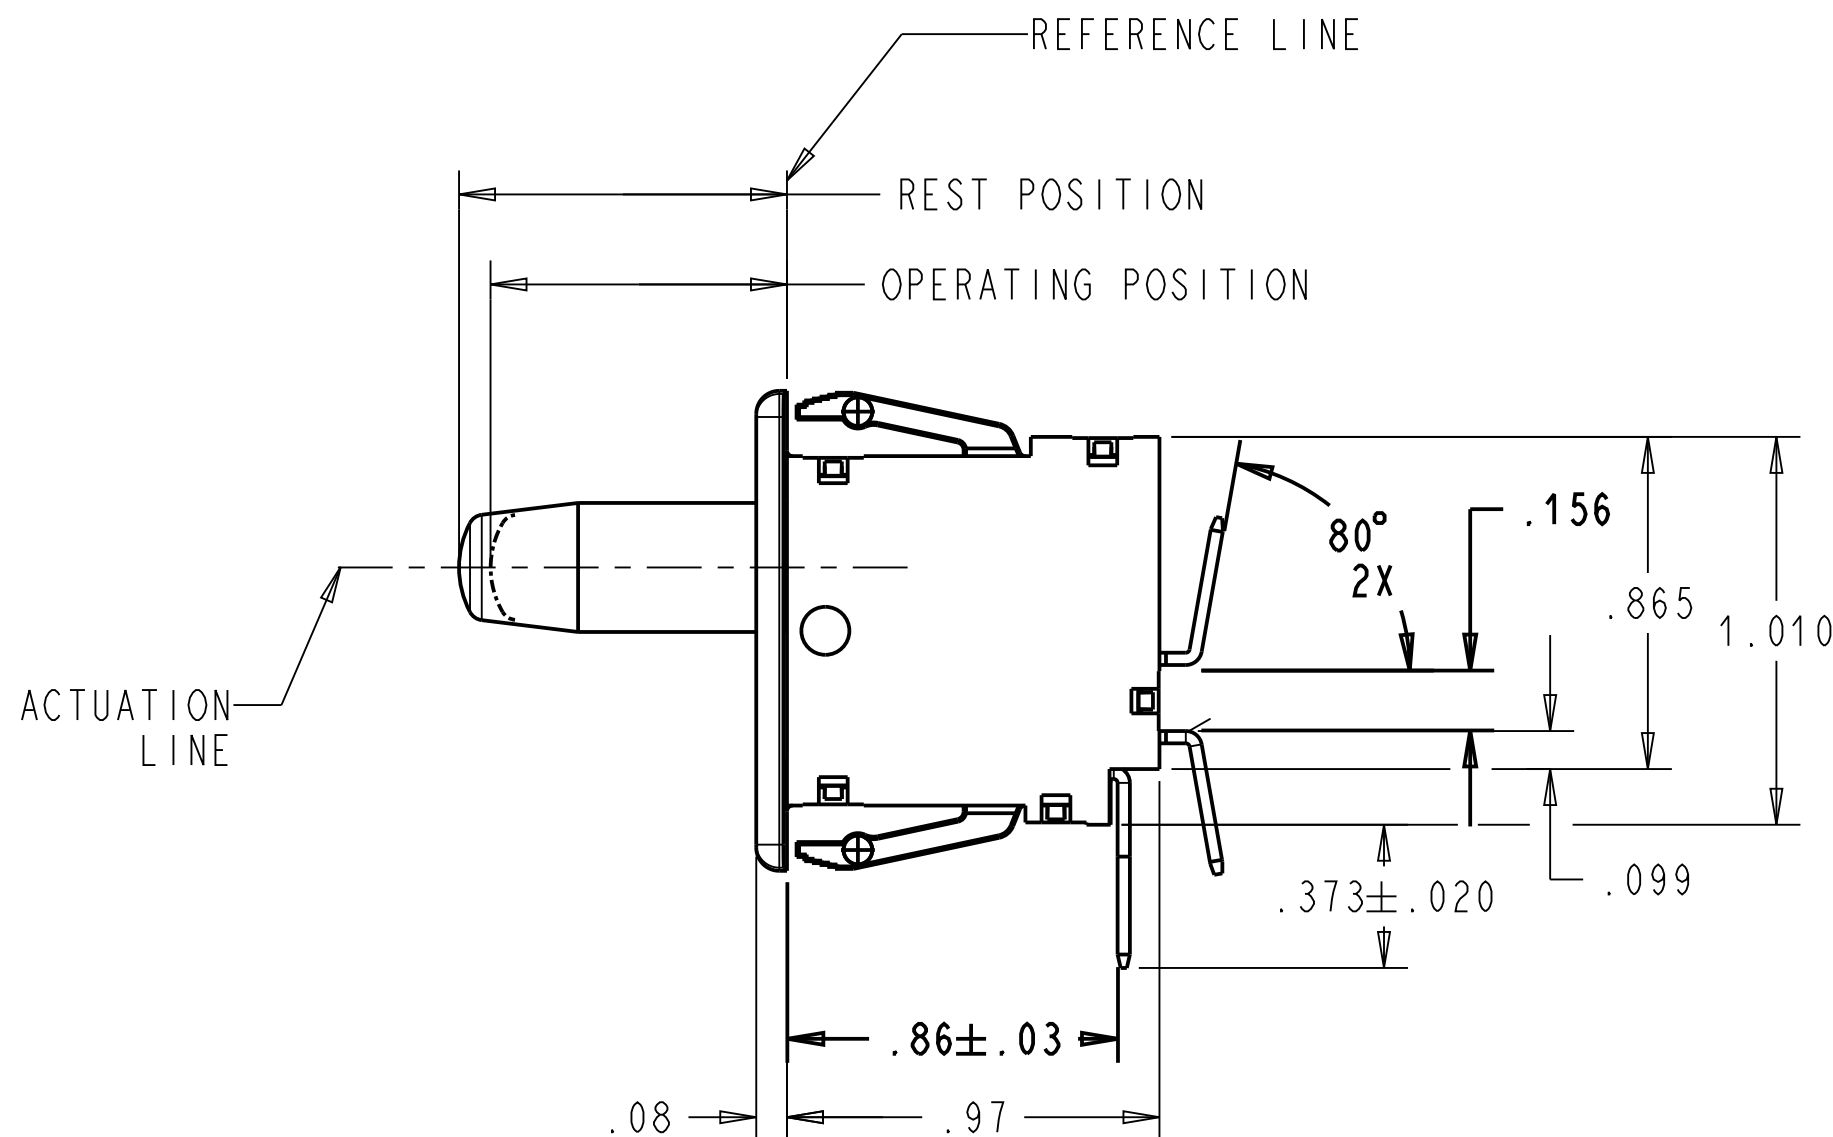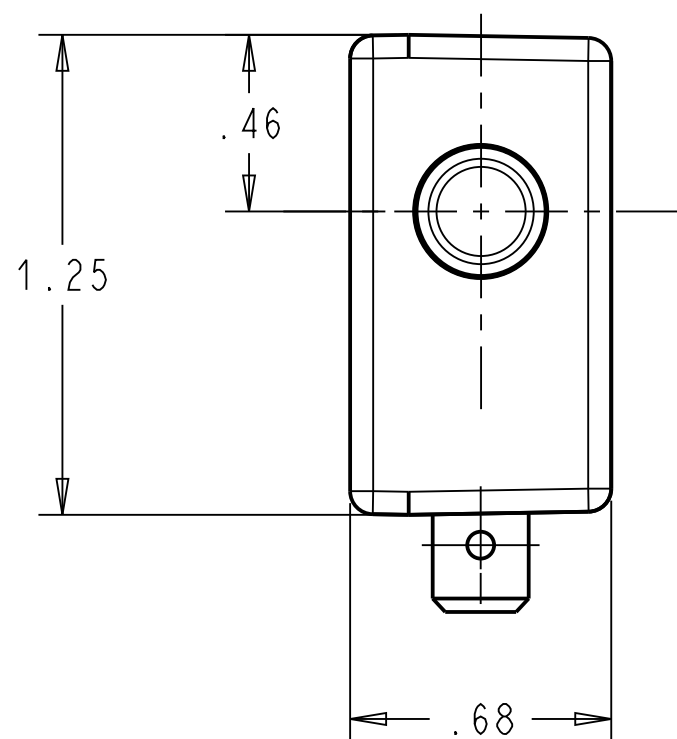

DWN: TLM
APVD: ELL
DATE: 06-Oct-09
THIRD ANGLE PROJECTION



PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

C	Z000375028	10-Aug-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
4000000138	INCH	± 0.02	± 0.015	± 5.0 °

C	ITEM NO.	0E65-00A0
SCALE:	2.000	SH 1 OF 1

ORIGINAL ON PROJE