

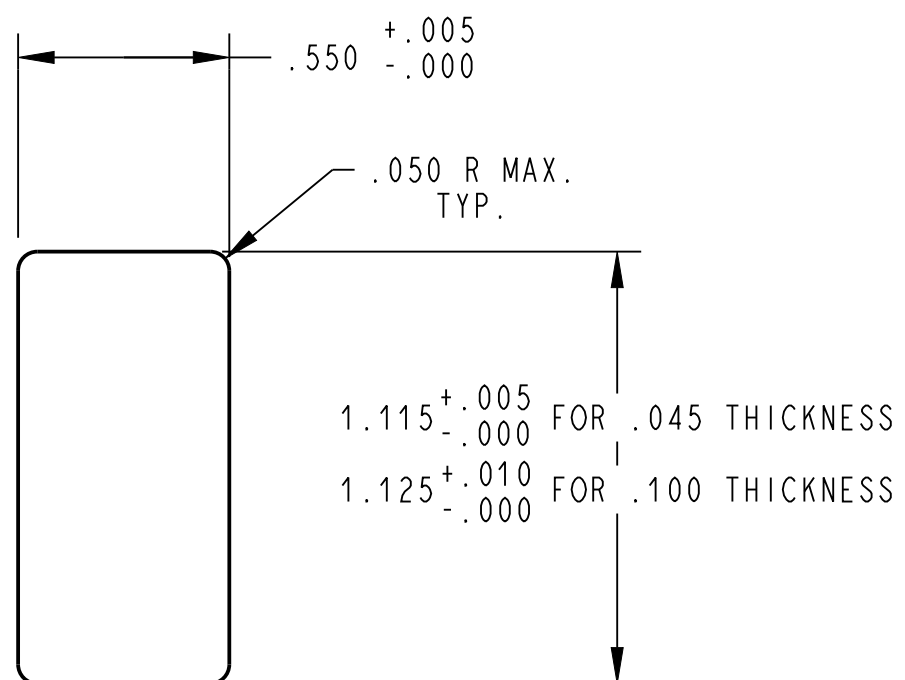
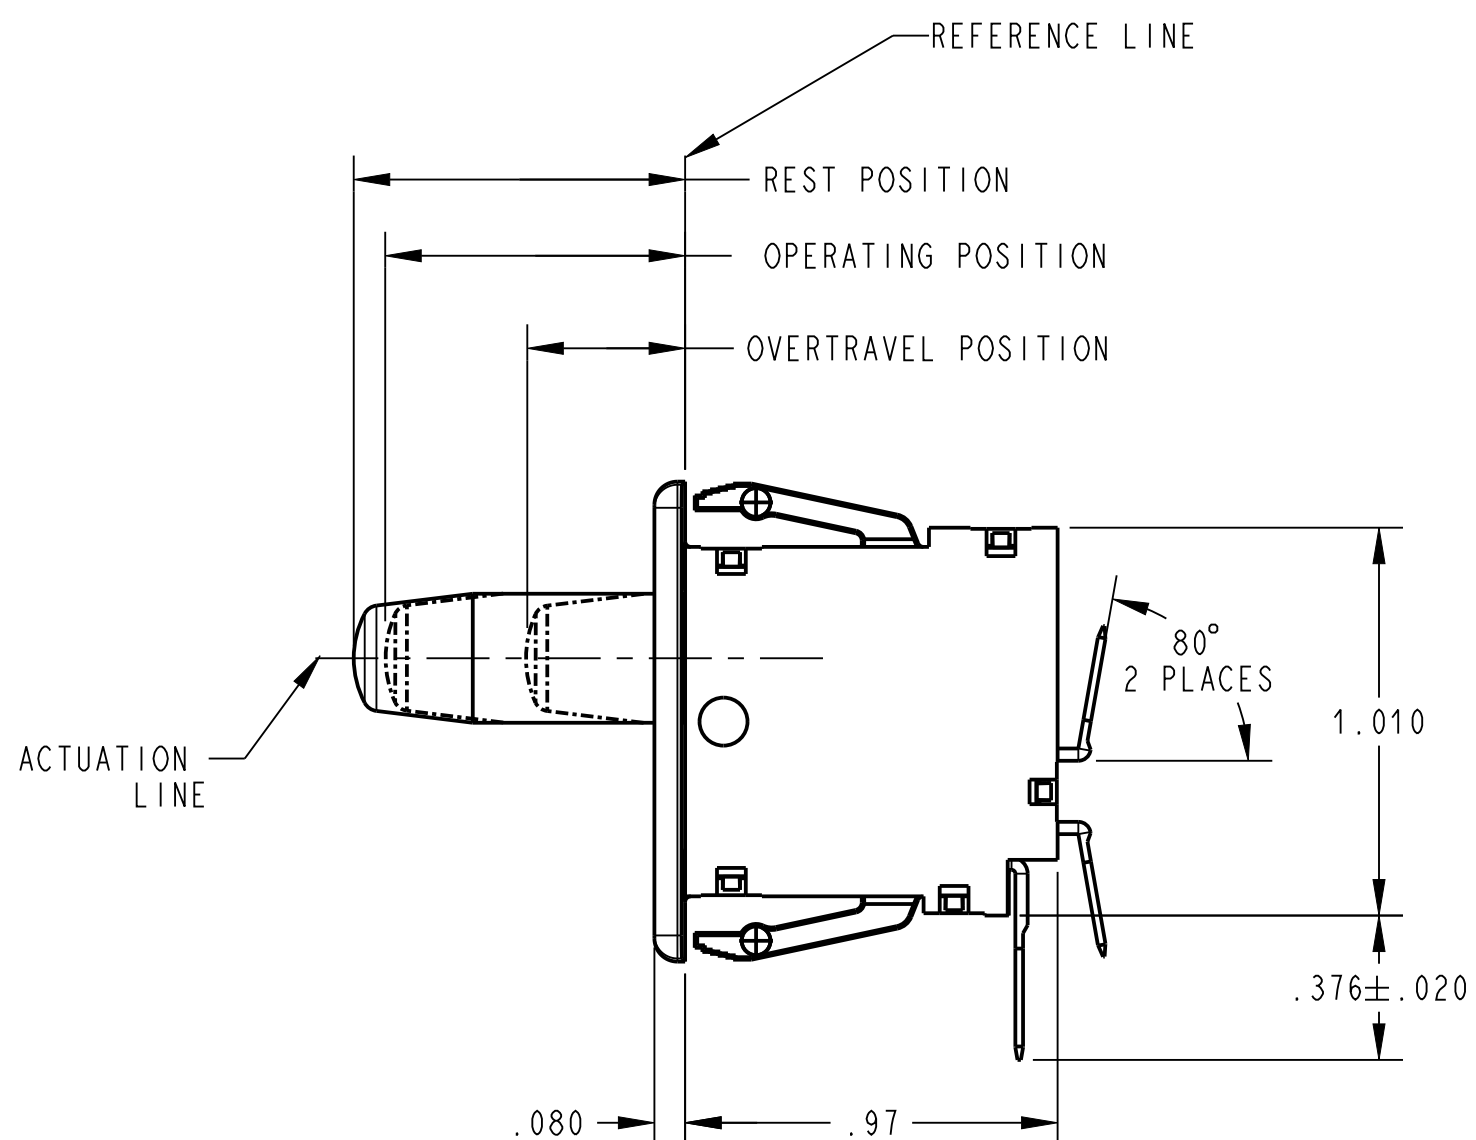


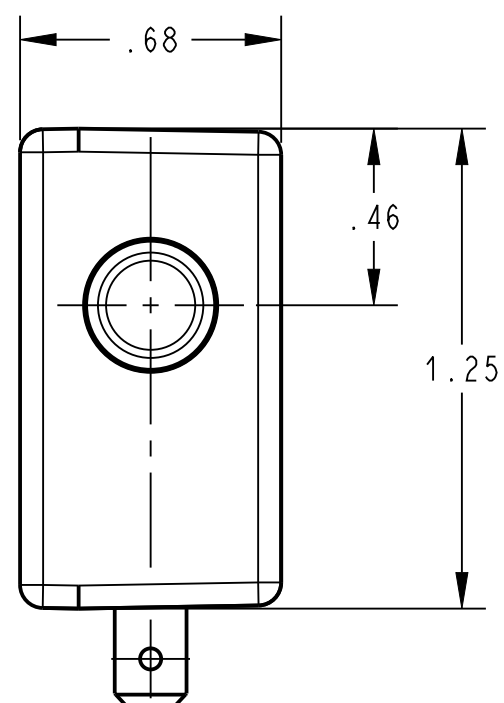

PANEL CUTOUT DETAIL
RECOMMENDED
PANEL THICKNESS
.045 - .100

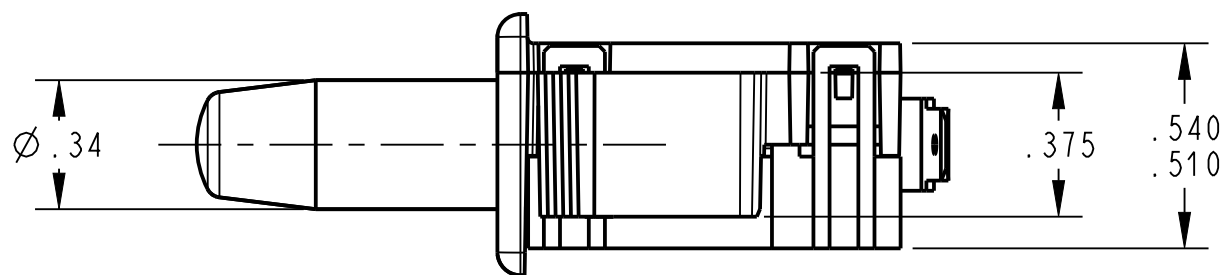

NOTES (UNLESS OTHERWISE SPECIFIED):

1. SWITCH CHARACTERISTICS:

REST POSITION: .845 TO .905
PRETRAVEL: .125 MAX.
OPERATING POSITION: .720 TO .820
OVER-TRAVEL: .375 MIN.
MOVEMENT DIFF: .045 MAX.
OPERATING FORCE grams 425 MAX.
RELEASE FORCE grams 85 MIN.

BUTTON POSITION
AT FULL OVERTRAVEL. .358 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
LINE AND MEASURED FROM THE REFERENCE LINE.


2. **us** ELECTRICAL RATINGS:
0.1 A, 125 VAC.
0.1A, 30 VDC


3. TERMINALS:
ARE .187 WIDE x .020 THICKNESS.

4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.

5. TEMPERATURE RATING: -40°C TO +85°C

6. ELECTRICAL LIFE AT RATED LOAD; 100,000 CYCLES
SIGNIFIED BY (L).

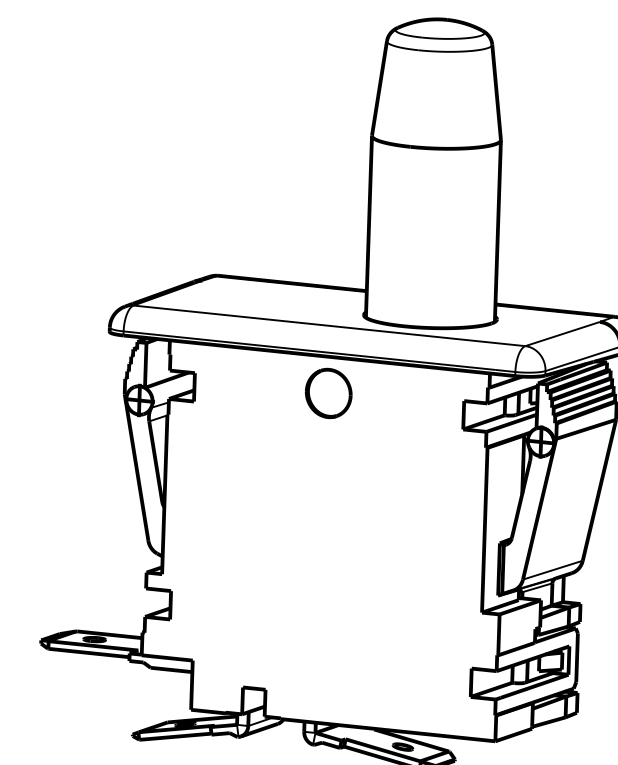

DWN: TLM		ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION SPECIFICATION DRAWING						
APVD: ELL								
DATE: 26-Sep-12								
THIRD ANGLE PROJECTION								
		TOLERANCE UNLESS SPECIFIED						
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES	C	ITEM NO. 0E68-00A0	
4000000138		INCH	± 0.02	± 0.015	± 5.0 °	SCALE: 2:1		SH 1 OF 1
4		3			2		1	