
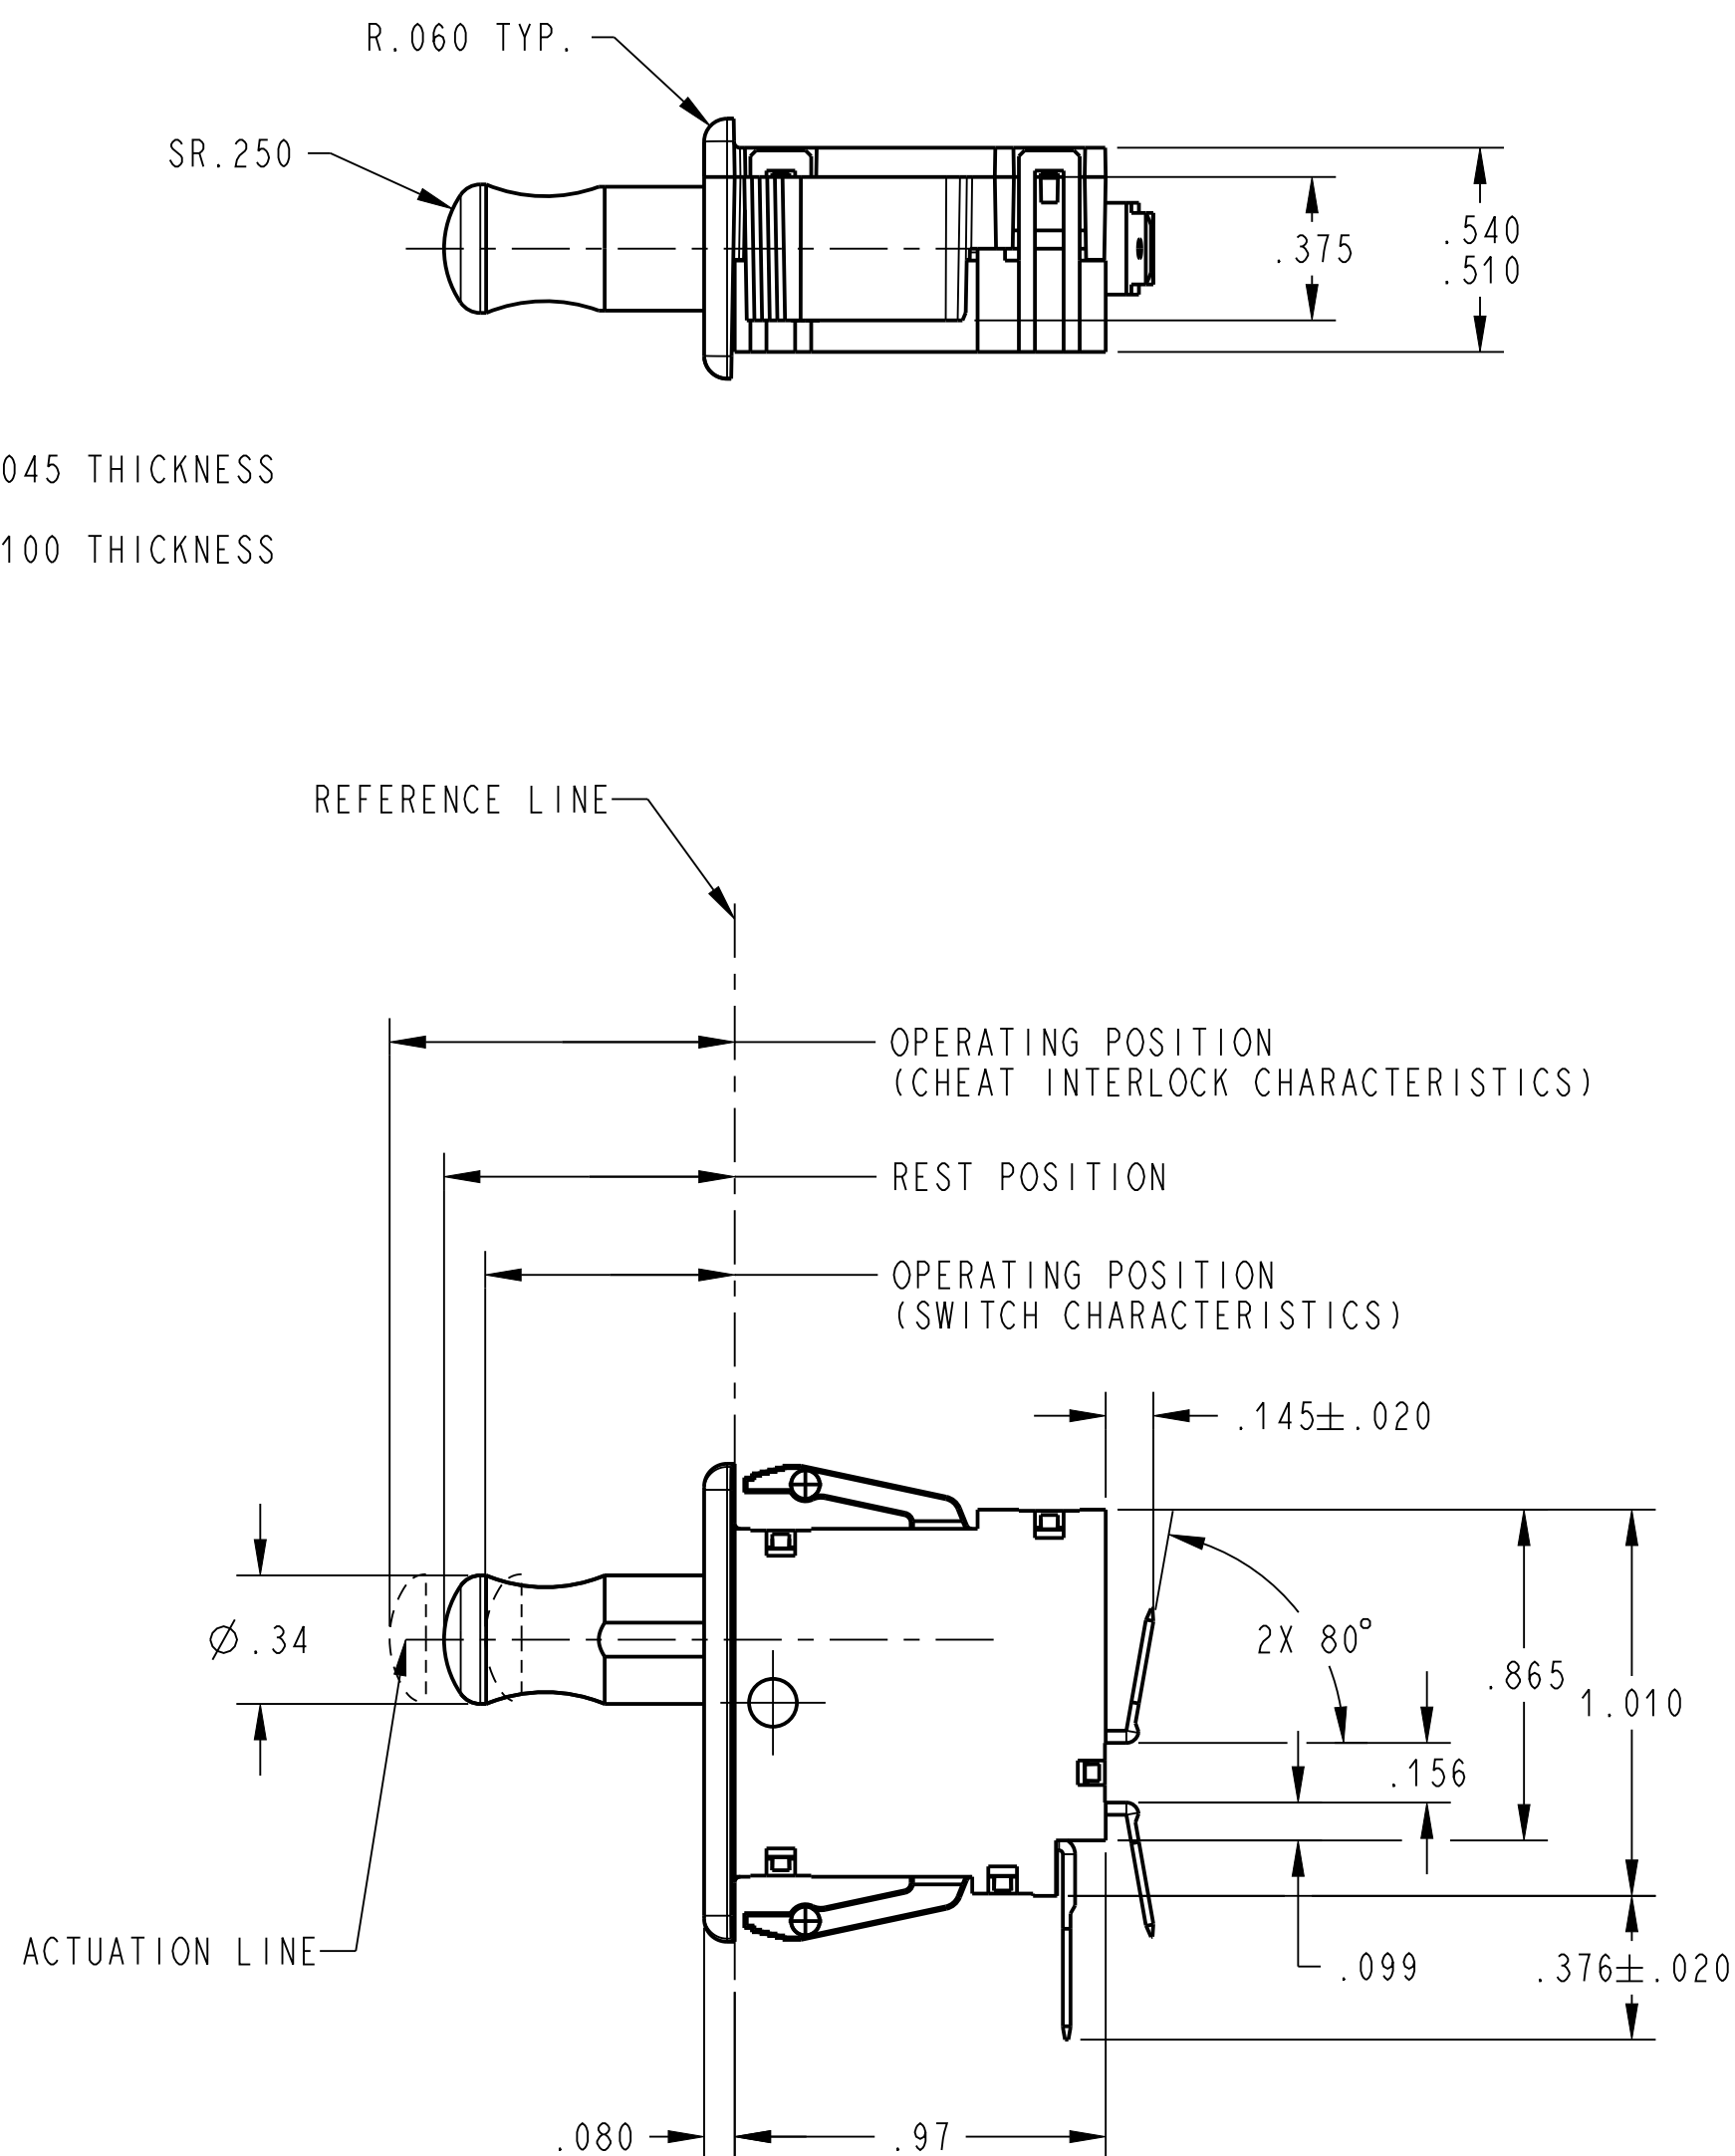


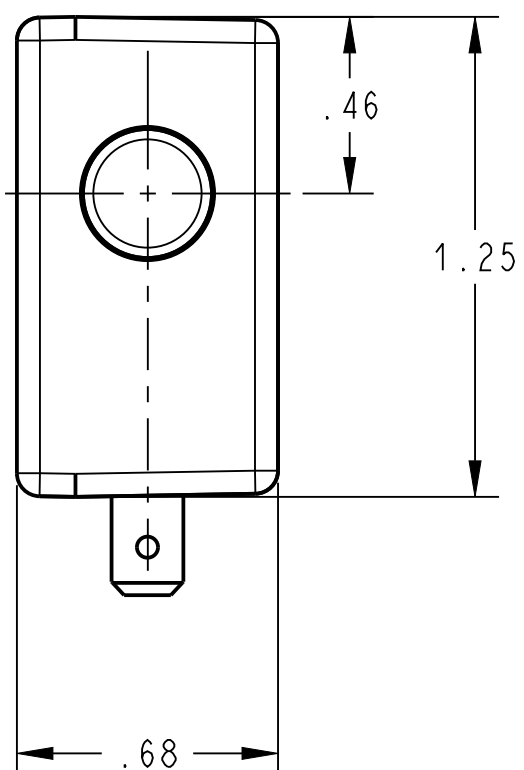

NOTES (UNLESS OTHERWISE SPECIFIED):

1. SWITCH CHARACTERISTICS:

```

REST POSITION:                .730 TO.790
PRETRAVEL:                   .125 MAX.
OPERATING POSITION:           .610 TO.710
OVER-TRAVEL:                 .100 MIN.
MOVEMENT DIFF:               .045 MAX.
OPERATING FORCE grams        425 MAX.

```

BUTTON POSITION
 AT FULL OVERTRAVEL. .520 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE
AND MEASURED FROM THE REFEREN

CHEAT INTERLOCK CHARACTERISTICS:

```

REST POSITION:                .730 TO .790
PRETRAVEL:                   .125 MAX.
OPERATING POSITION:           .800 TO .900
OVER-TRAVEL:                 .050 MIN.
MOVEMENT DIFF:               .060 MAX.
OPERATING FORCE grams        585 MAX.
FULL OVERTRAVEL:            .980 MAX.

```

2. **cRA** US ELECTRICAL RATING

0.1 A, 125 VAC.
0.1A, 30 VDC

3. TERMINALS:

ARE .187 WIDTH x .020 THICKNESS.

4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.


5. TEMPERATURE RATING:


-40°C TO +85°C

6. COLORS:

FACEPLATE WHITE
BUTTON WHITE

7. ELECTRICAL LIFE AT RATED LOAD; 100,000 CYCLES
SIGNIFIED BY (1).

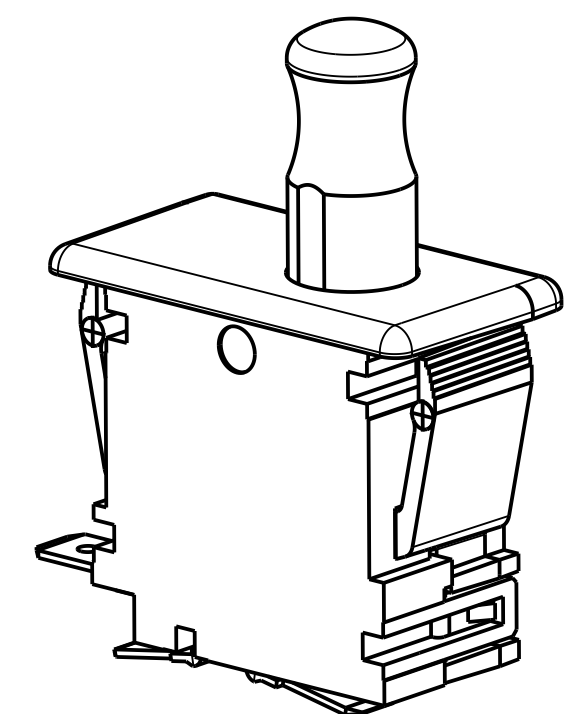

DWN: J. DOLNIK		 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION SPECIFICATION DRAWING			C		ITEM NO.		0E68-30A0		
APVD: ELL											
DATE: 18-Apr-07											
THIRD ANGLE PROJECTION											
		TOLERANCE UNLESS SPECIFIED									
PROJECT/CSR		DWG UNITS	X.XX	X.XXX	ANGLES						
4000000138		INCH	± 0.02	± 0.015	± 5.0 °	SCALE:		2:1	SH 1	OF 1	