

NOTES (UNLESS OTHERWISE SPECIFIED):

1. SWITCH CHARACTERISTICS:

REST POSITION: .730 TO .790
PRETRAVEL: .125 MAX.
OPERATING POSITION: .610 TO .710
OVER-TRAVEL: .100 MIN.
MOVEMENT DIFF: .045 MAX.
OPERATING FORCE grams 425 MAX.

BUTTON POSITION
AT FULL OVERTRAVEL. .520 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
LINE AND MEASURED FROM THE REFERENCE LINE.

CHEAT INTERLOCK CHARACTERISTICS:

REST POSITION: .730 TO .790
PRETRAVEL: .125 MAX.
OPERATING POSITION: .800 TO .900
OVER-TRAVEL: .050 MIN.
MOVEMENT DIFF: .060 MAX.
FULL OVERTRAVEL: .980 MAX.
OPERATING FORCE grams 585 MAX.



2.  **UL** ELECTRICAL RATING
10 A, 125/250 VAC
1/3 HP, 125/250 VAC

3. TERMINALS;
ARE .187 WIDTH x .020 THICKNESS.



4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.

5. TEMPERATURE RATING:
-40°C TO +85°C


6. COLORS: FACEPLATE WHITE.
BUTTON WHITE.

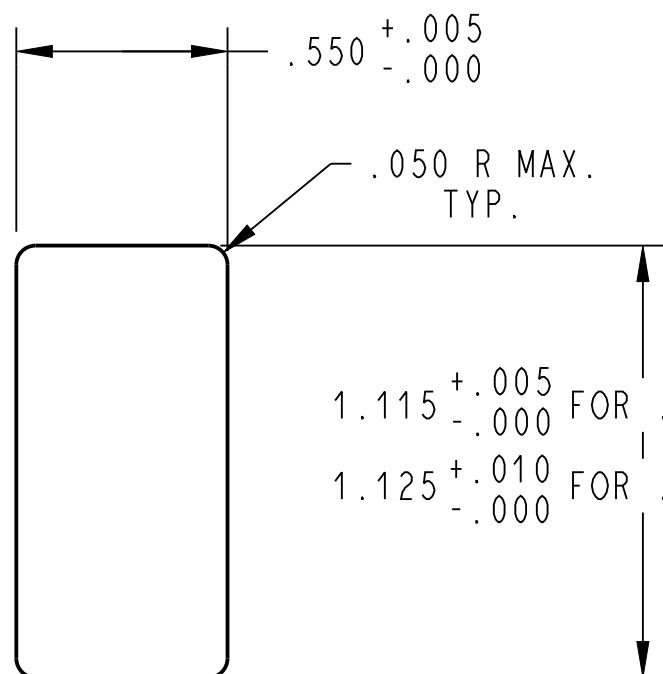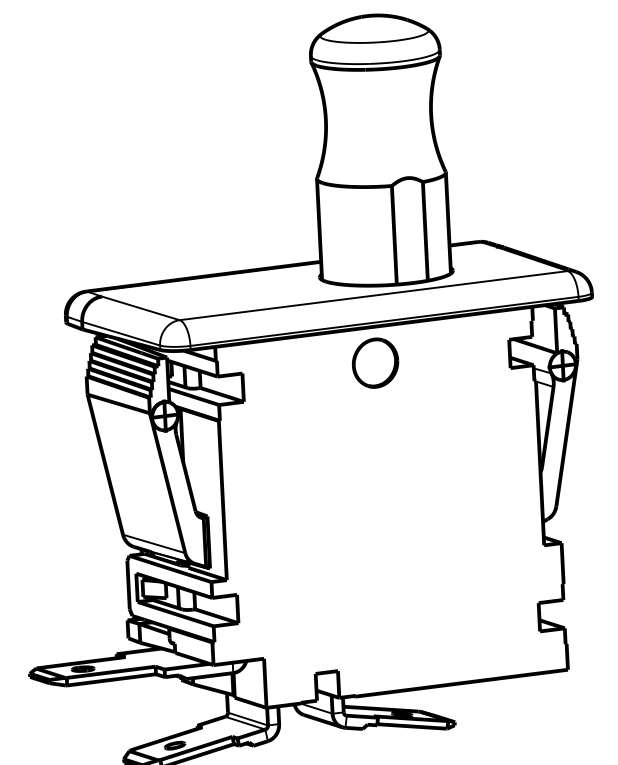

PANEL CUTOUT DETAIL
RECOMMENDED
PANEL THICKNESS
.045-.100

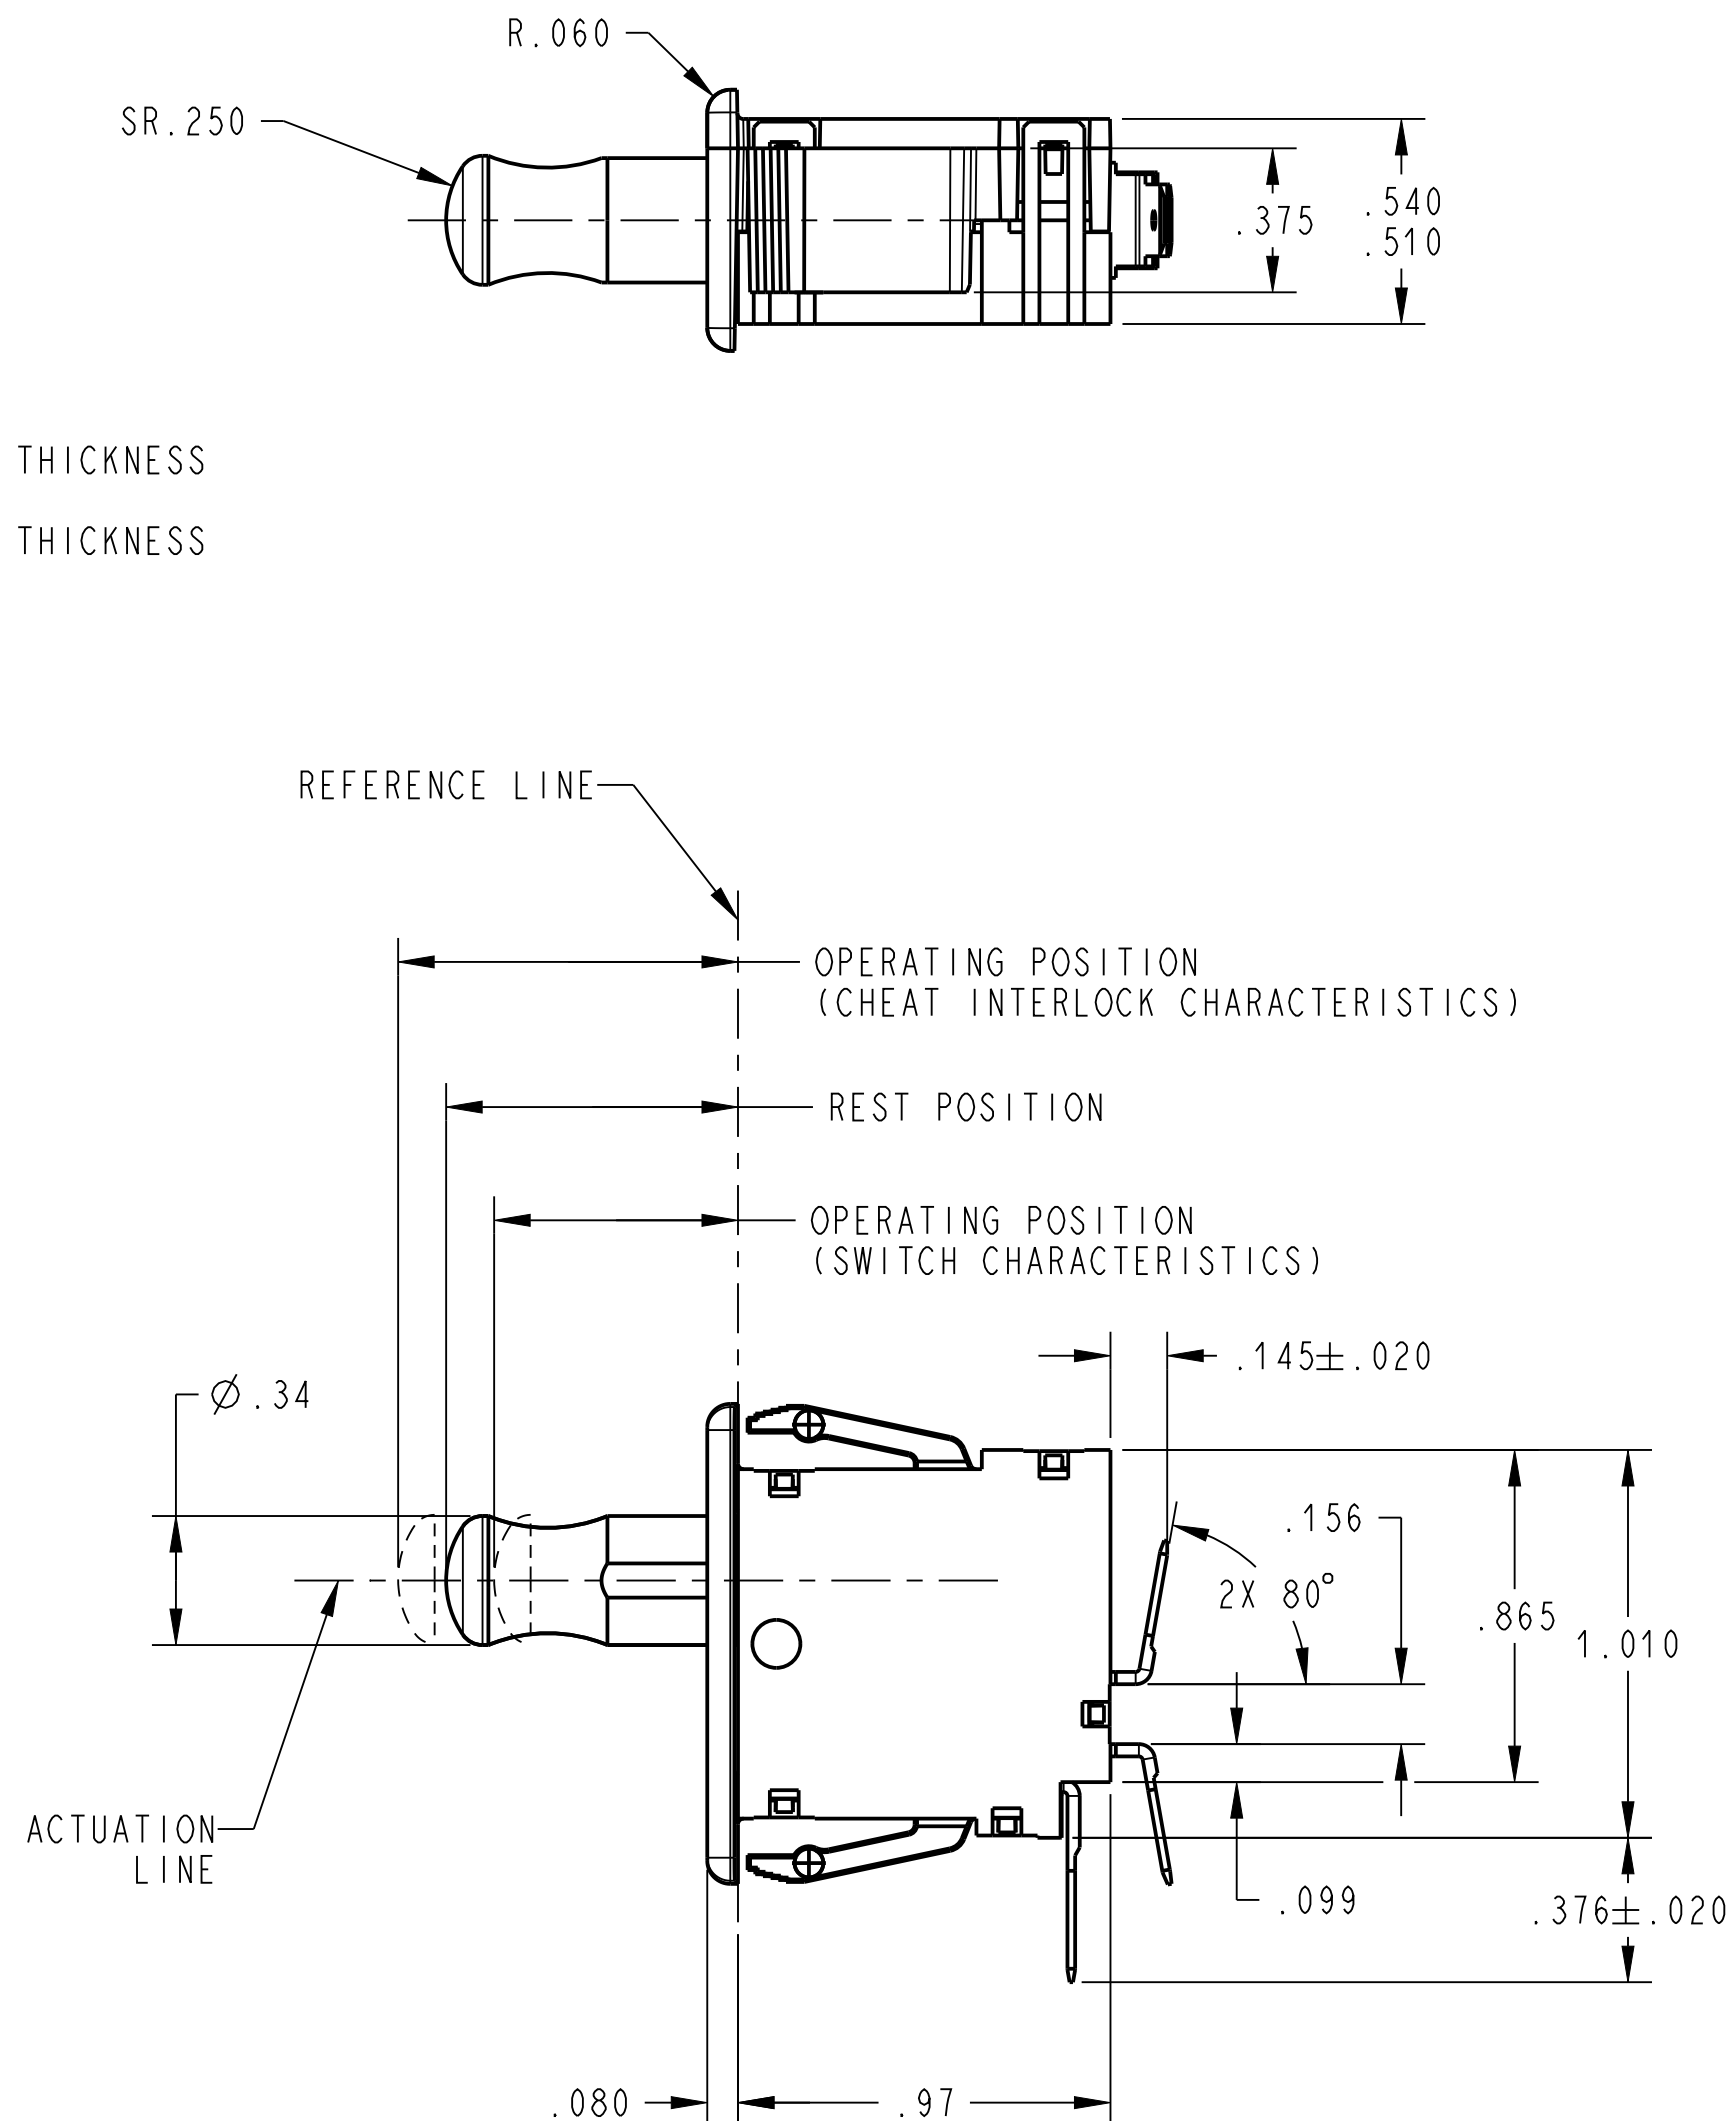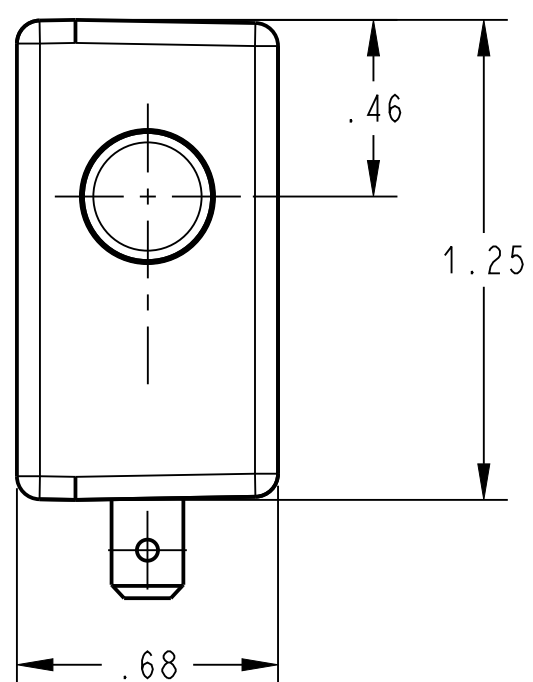

DWN: J. DOLNIK
APVD: RC
DATE: 2015-08-24
THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

G	Z000375235	06-Sep-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	4000000138
--------------	------------

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.015	± 5.0 °

C	ITEM NO.	0E69-30A0
SCALE:	2:1	SH 1 OF 1