

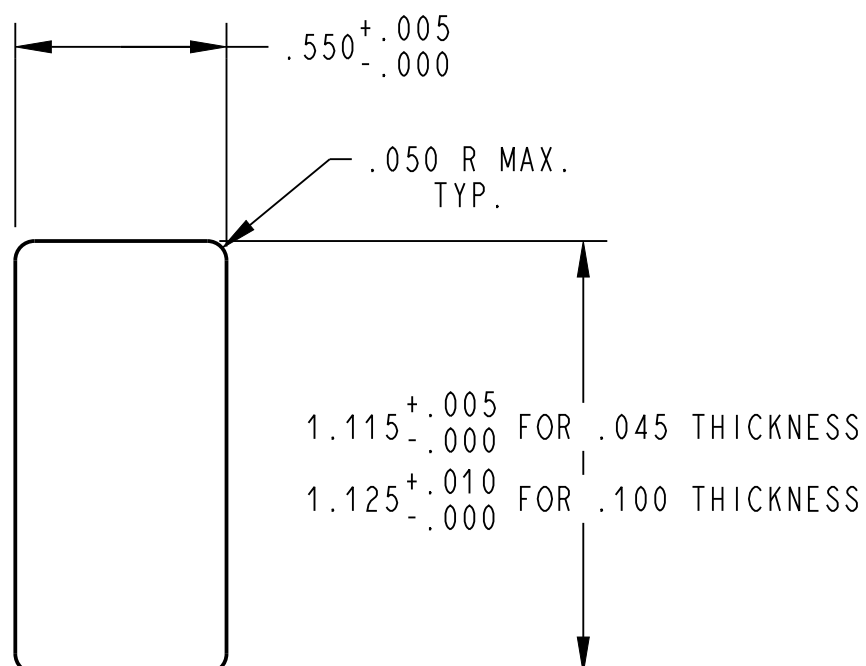
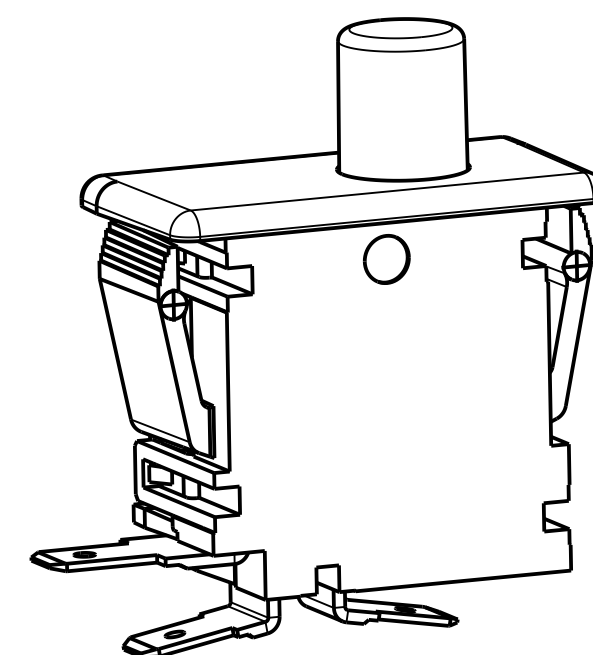
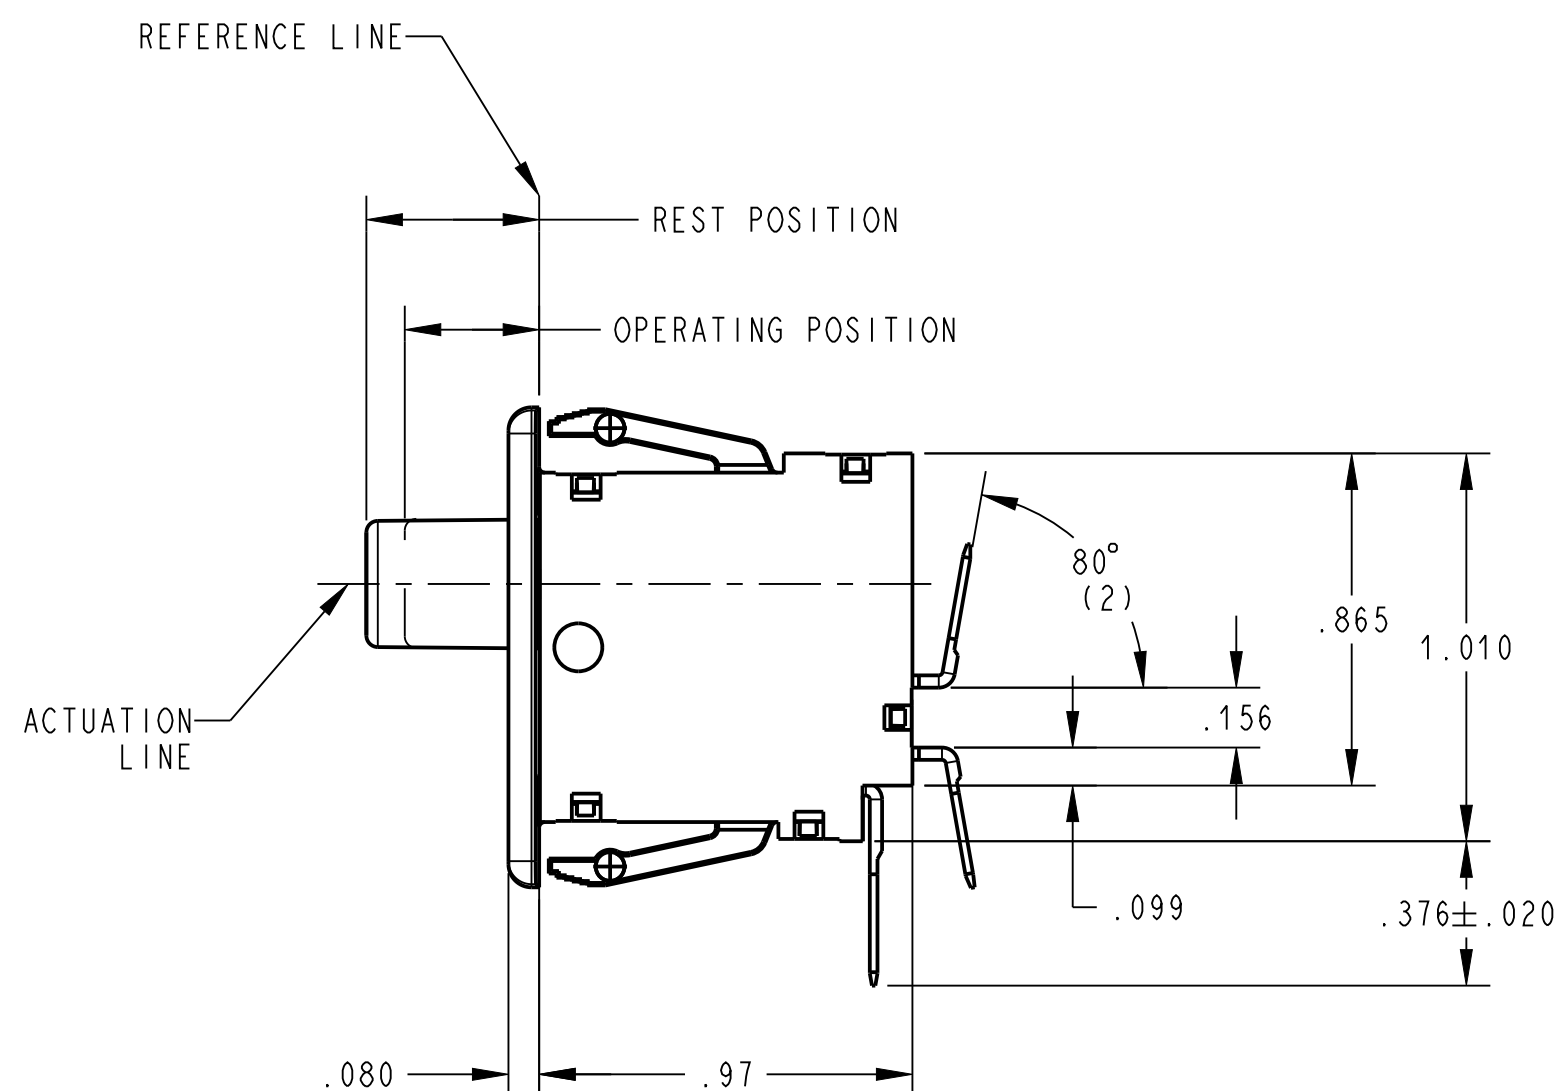


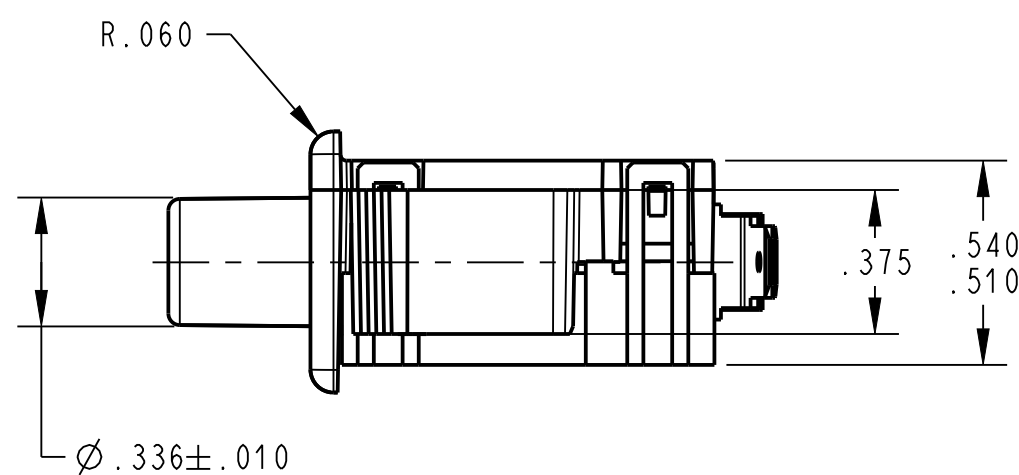

PANEL CUTOUT DETAIL
RECOMMENDED
PANEL THICKNESS
.045-.100

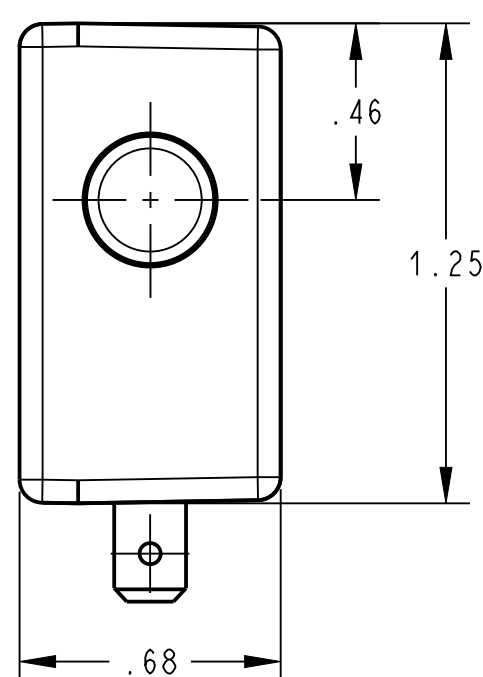

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. *SWITCH CHARACTERISTICS

REST POSITION	.420 TO .480
PRE-TRAVEL	.125 MAX.
OPERATING POSITION	.300 TO .400
OVER TRAVEL	.175 MIN.
MOVEMENT DIFF.	.045 MAX.
OPERATING FORCE grams	425 MAX.
RELEASE FORCE grams	85 MIN.

BUTTON POSITION
AT FULL OVERTRAVEL. .125 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
LINE AND MEASURED FROM THE REFERENCE LINE.


2. **us** ELECTRICAL RATING
10 A, 125/250 VAC
1/3 H.P. 125/250 VAC

3. TERMINALS:
ARE .187 WIDE x .020 THICKNESS.

4. RECOGNIZED TO U.S. AND CANADIAN
REQUIREMENTS UNDER THE COMPONENT
RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.

5. TEMPERATURE RATING: -40°C TO +85°C

DWN: J. DOLNIK
APVD: ELL
DATE: 14-Apr-03
THIRD ANGLE PROJECTION



PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B	Z000375235	06-Sep-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	4000000138
--------------	------------

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.015	± 5.0 °

C	ITEM NO.	0E69-40A0
SCALE:	2:1	SH 1 OF 1

ORIGINAL ON PROJE