

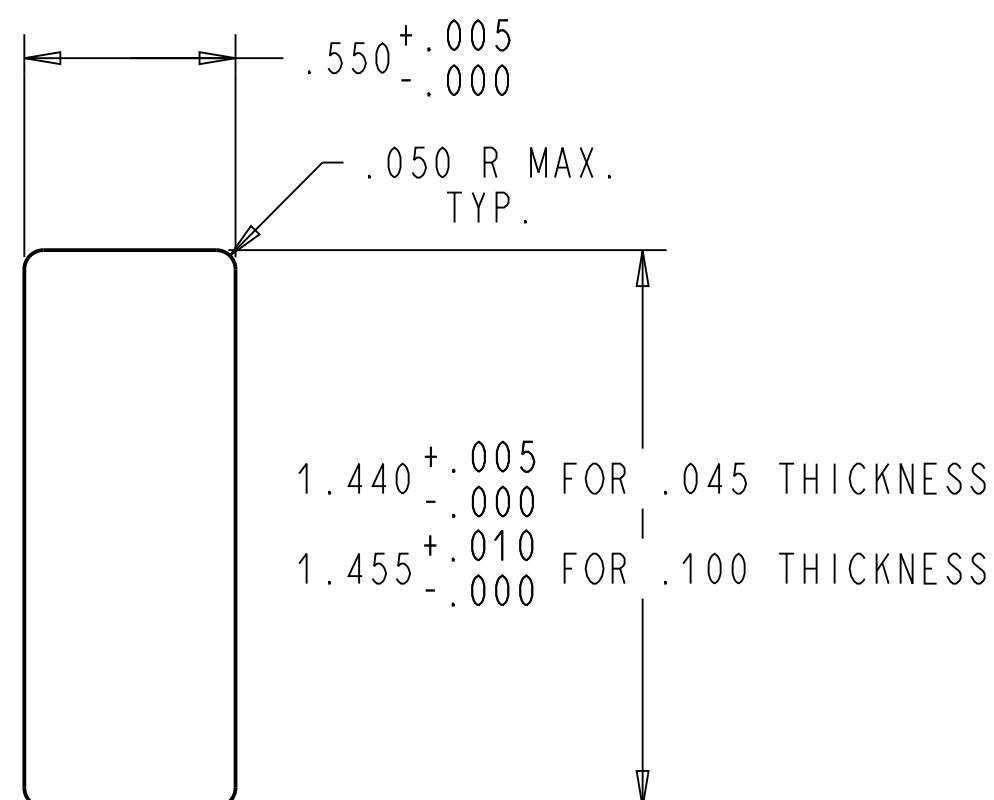
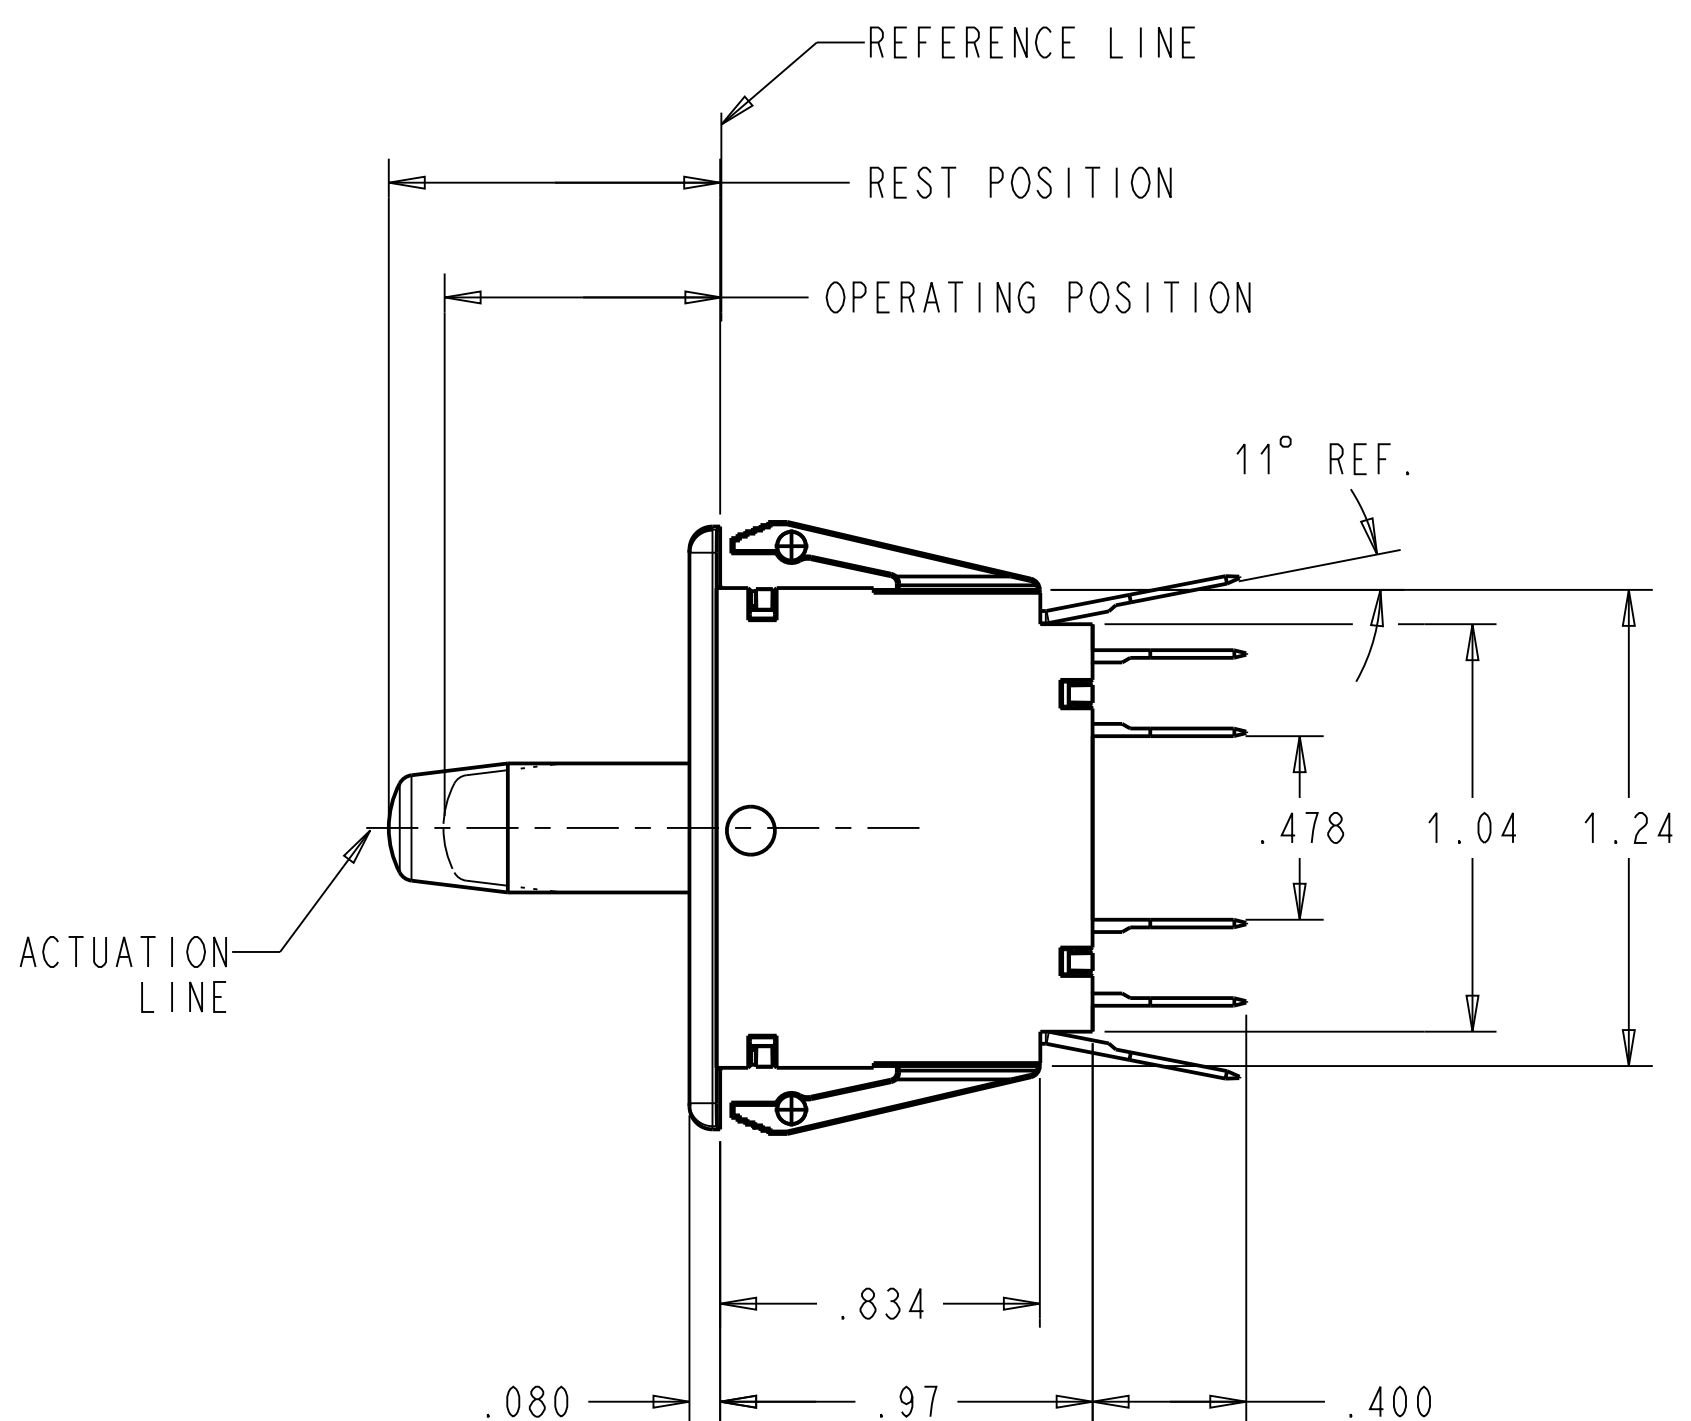


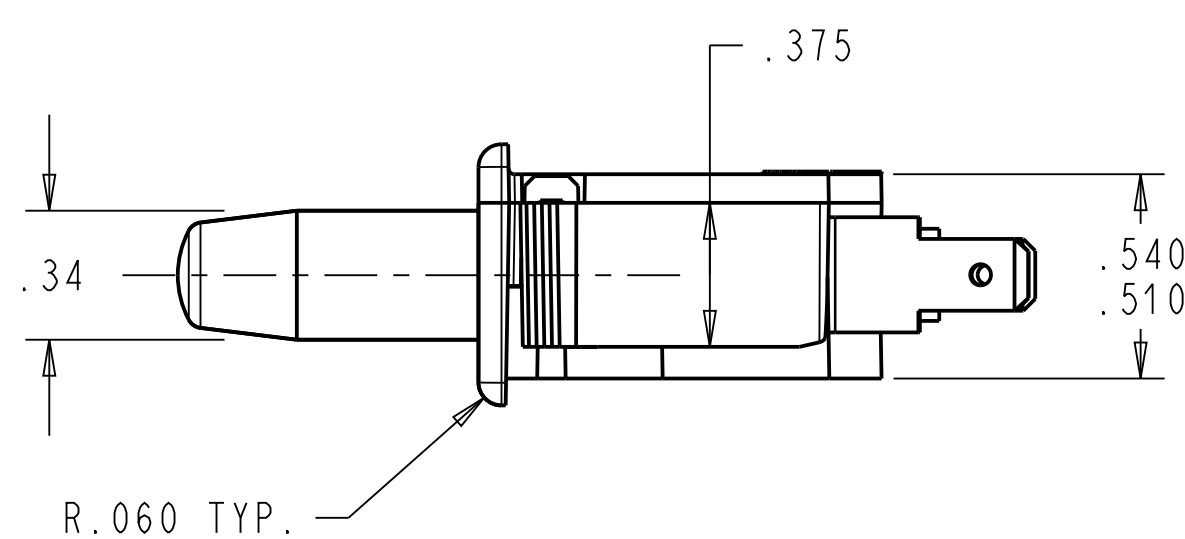

PANEL CUTOUT DETAIL
RECOMMENDED
PANEL THICKNESS
.045-.100

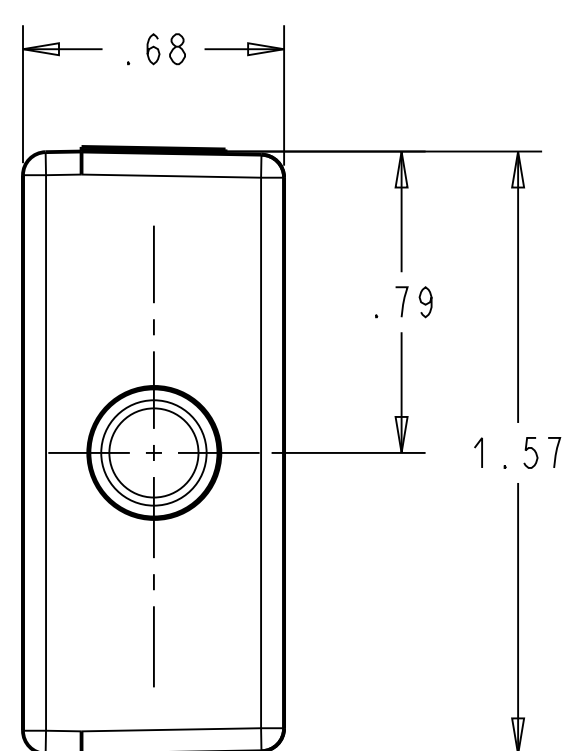



NOTES: (UNLESS OTHERWISE SPECIFIED)

- SWITCH CHARACTERISTICS:
 REST POSITION .845 TO .905
 PRETRAVEL: .125 MAX.
 OPERATING POSITION: .720 TO .820
 OVER-TRAVEL: .375 MIN.
 MOVEMENT DIFF .075 MAX.
 OPERATING FORCE grams 680 MAX.
 RELEASE FORCE grams 170 MIN.

 BUTTON POSITION
 AT FULL OVERTRAVEL. .358 MAX.

 ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
 LINE AND MEASURED FROM THE REFERENCE LINE.
- UL** ELECTRICAL RATING:
 0.1A, 125 VAC.
 0.1A, 30 VDC.
- TERMINALS:
 ARE: .187 WIDTH x .020 THICKNESS.
- RECOGNIZED TO U.S. AND CANADIAN
 REQUIREMENTS UNDER THE COMPONENT
 RECOGNITION PROGRAM OF UNDERWRITERS
 LABORATORIES, INC.
- TEMPERATURE RATINGS: -40°C TO 85°C

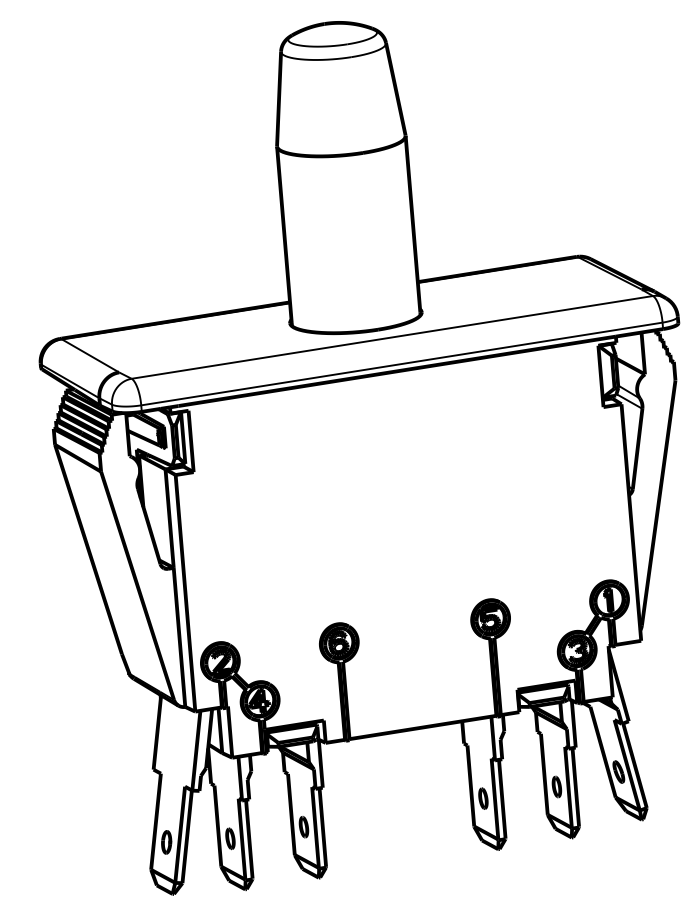

DWN: J. DOLNIK					 ZF Electronic Systems		
APVD: RC							
DATE: 02-Feb-05					PLEASANT PRAIRIE, WISCONSIN U.S.A.		
THIRD ANGLE PROJECTION					NAME / DESCRIPTION		
					SPECIFICATION DRAWING		
		TOLERANCE UNLESS SPECIFIED			C	ITEM NO. 0E78-00A0	
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX			
4000000138		INCHES	± 0.02	± 0.015	± 5.0 °	SCALE: 2:1	
4		3			2	1	1
VD					SH 1 OF 1		