
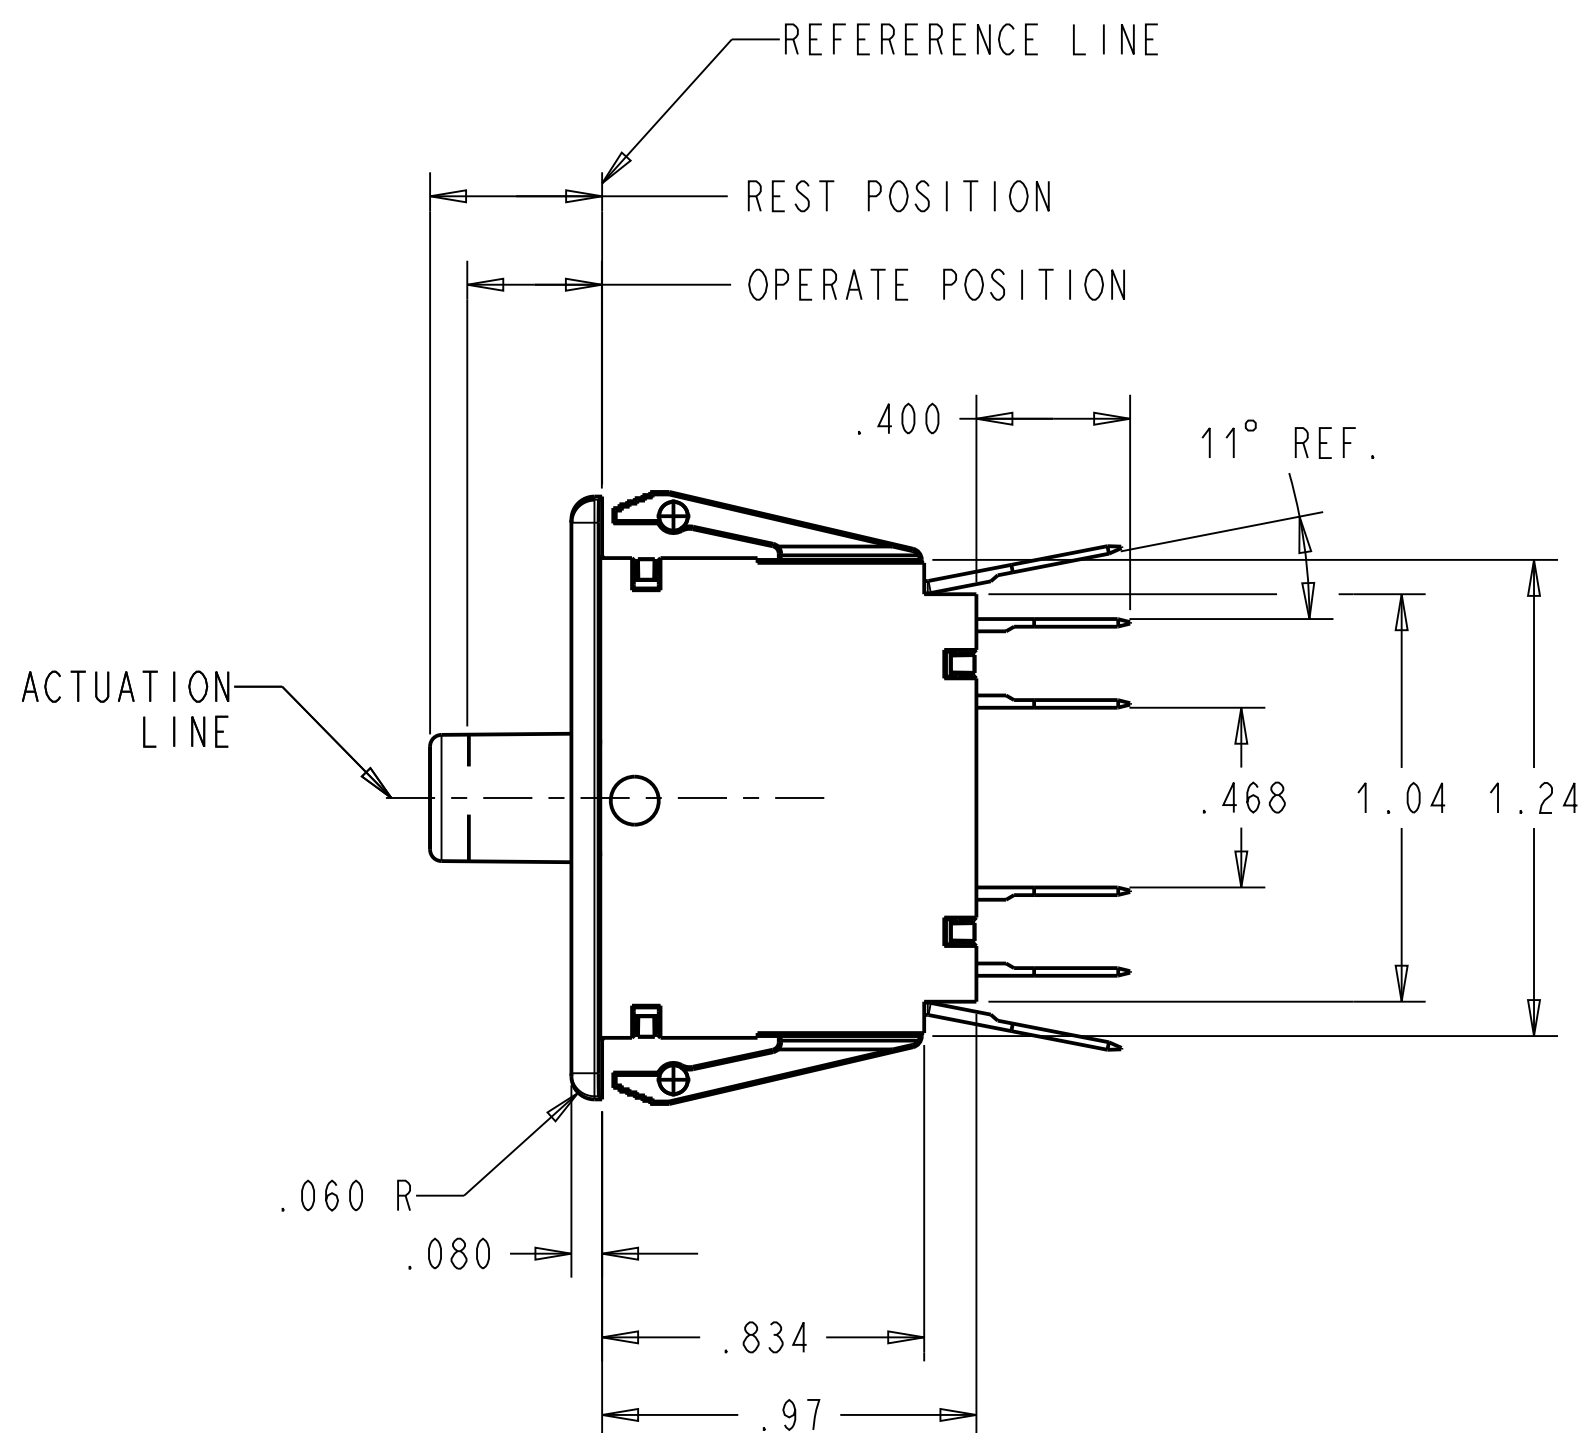
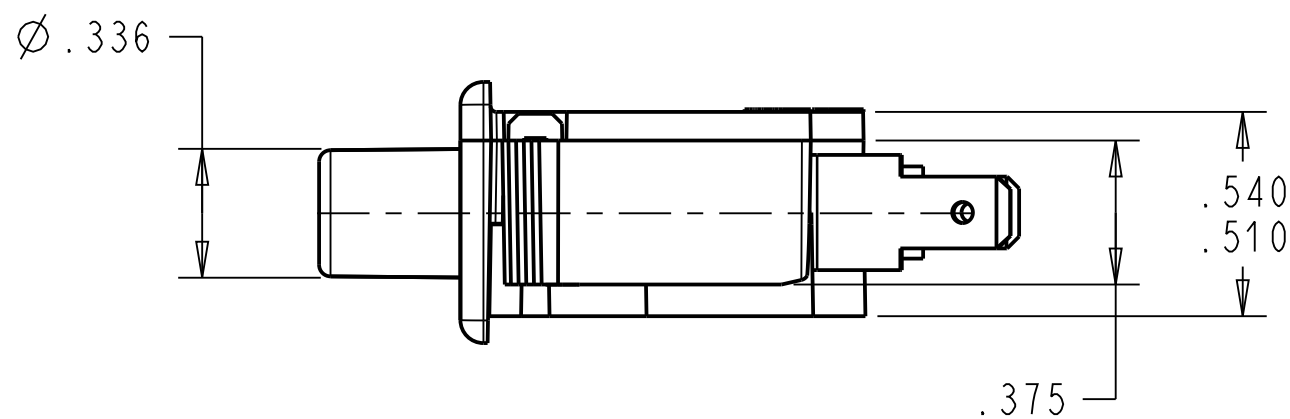
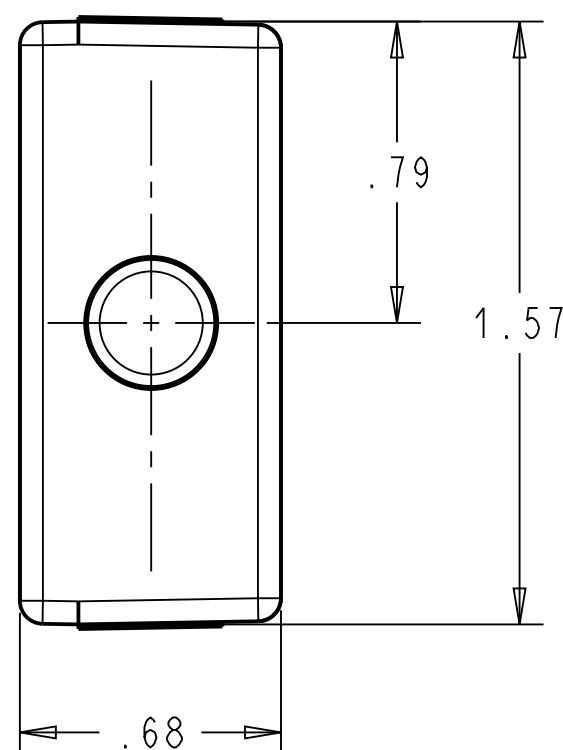


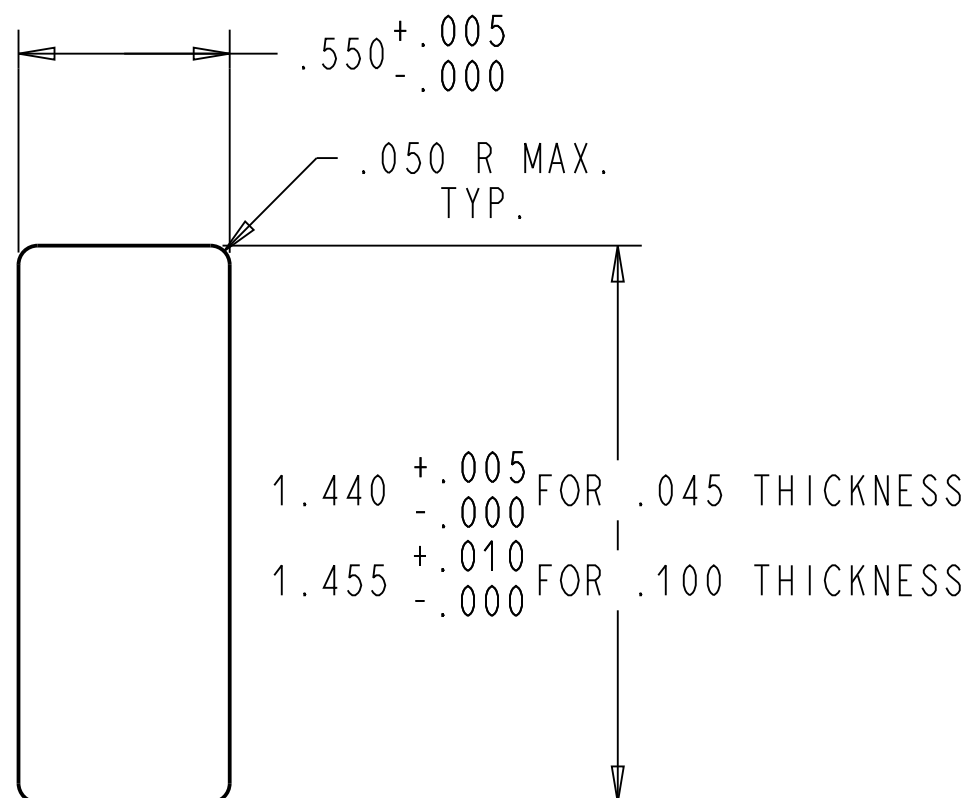

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. SWITCH CHARACTERISTICS:

REST POSITION	.420 TO .480
PRETRAVEL:	.125 MAX.
OPERATING POSITION:	.300 TO .400
OVER-TRAVEL:	.175 MIN.
MOVEMENT DIFFERENTIAL:	.075 MAX.
OPERATING FORCE grams	680 MAX.
RELEASE FORCE grams	170 MIN.

BUTTON POSITION
AT FULL OVERTRAVEL. .125 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
LINE AND MEASURED FROM THE REFERENCE LINE.

2. **UL**us ELECTRICAL RATING:


0.1A, 125 VAC.
0.1A, 30 VDC

3. TERMINALS:


ARE .187 WIDTH x .020 THICKNESS.

4. RECOGNIZED TO U.S. AND CANADIAN
REQUIREMENTS UNDER THE COMPONENT
RECOGNITION PROGRAM OF UNDERWRITERS
LABORATORIES, INC.

5. TEMPERATURE RATINGS: -40°C TO 85°C

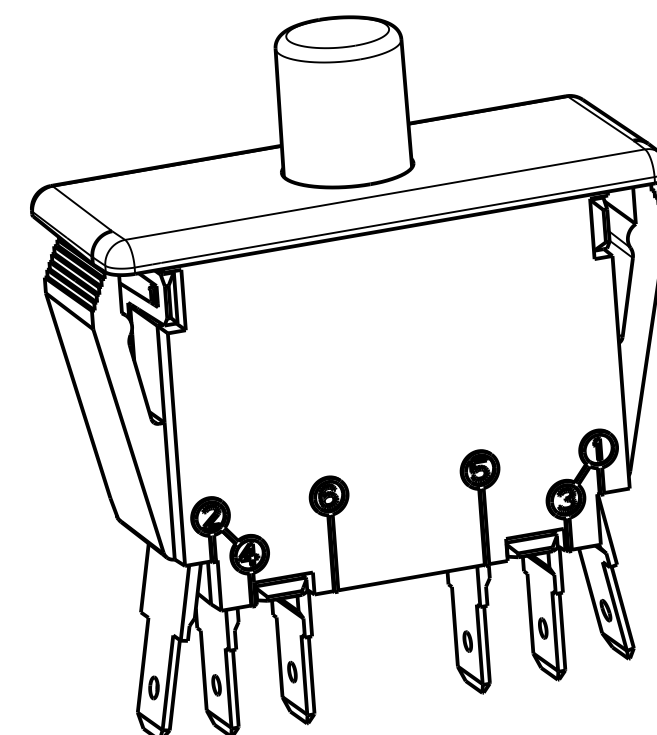

DWN: J. DOLNIK
APVD: RC
DATE: 25-Sep-03
THIRD ANGLE PROJECTION



PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

C	Z000375476	10-Aug-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	4000000138
--------------	------------

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.015	± 5.0 °

C	ITEM NO.	0E78-40A0
SCALE:	2:1	SH 1 OF 1