

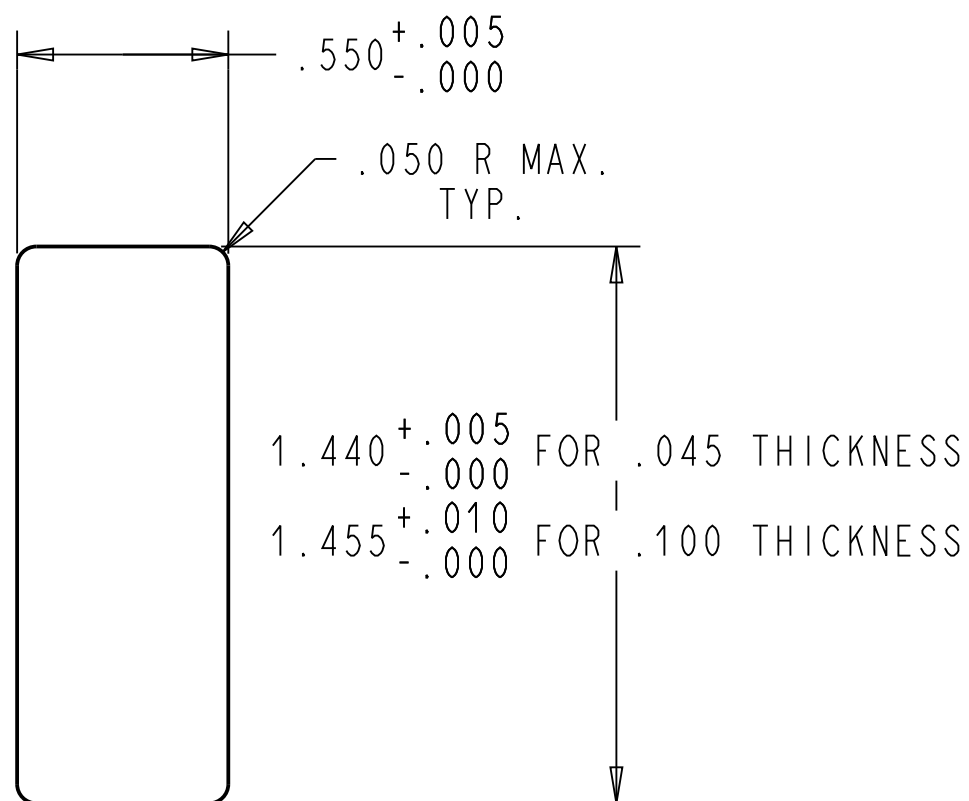
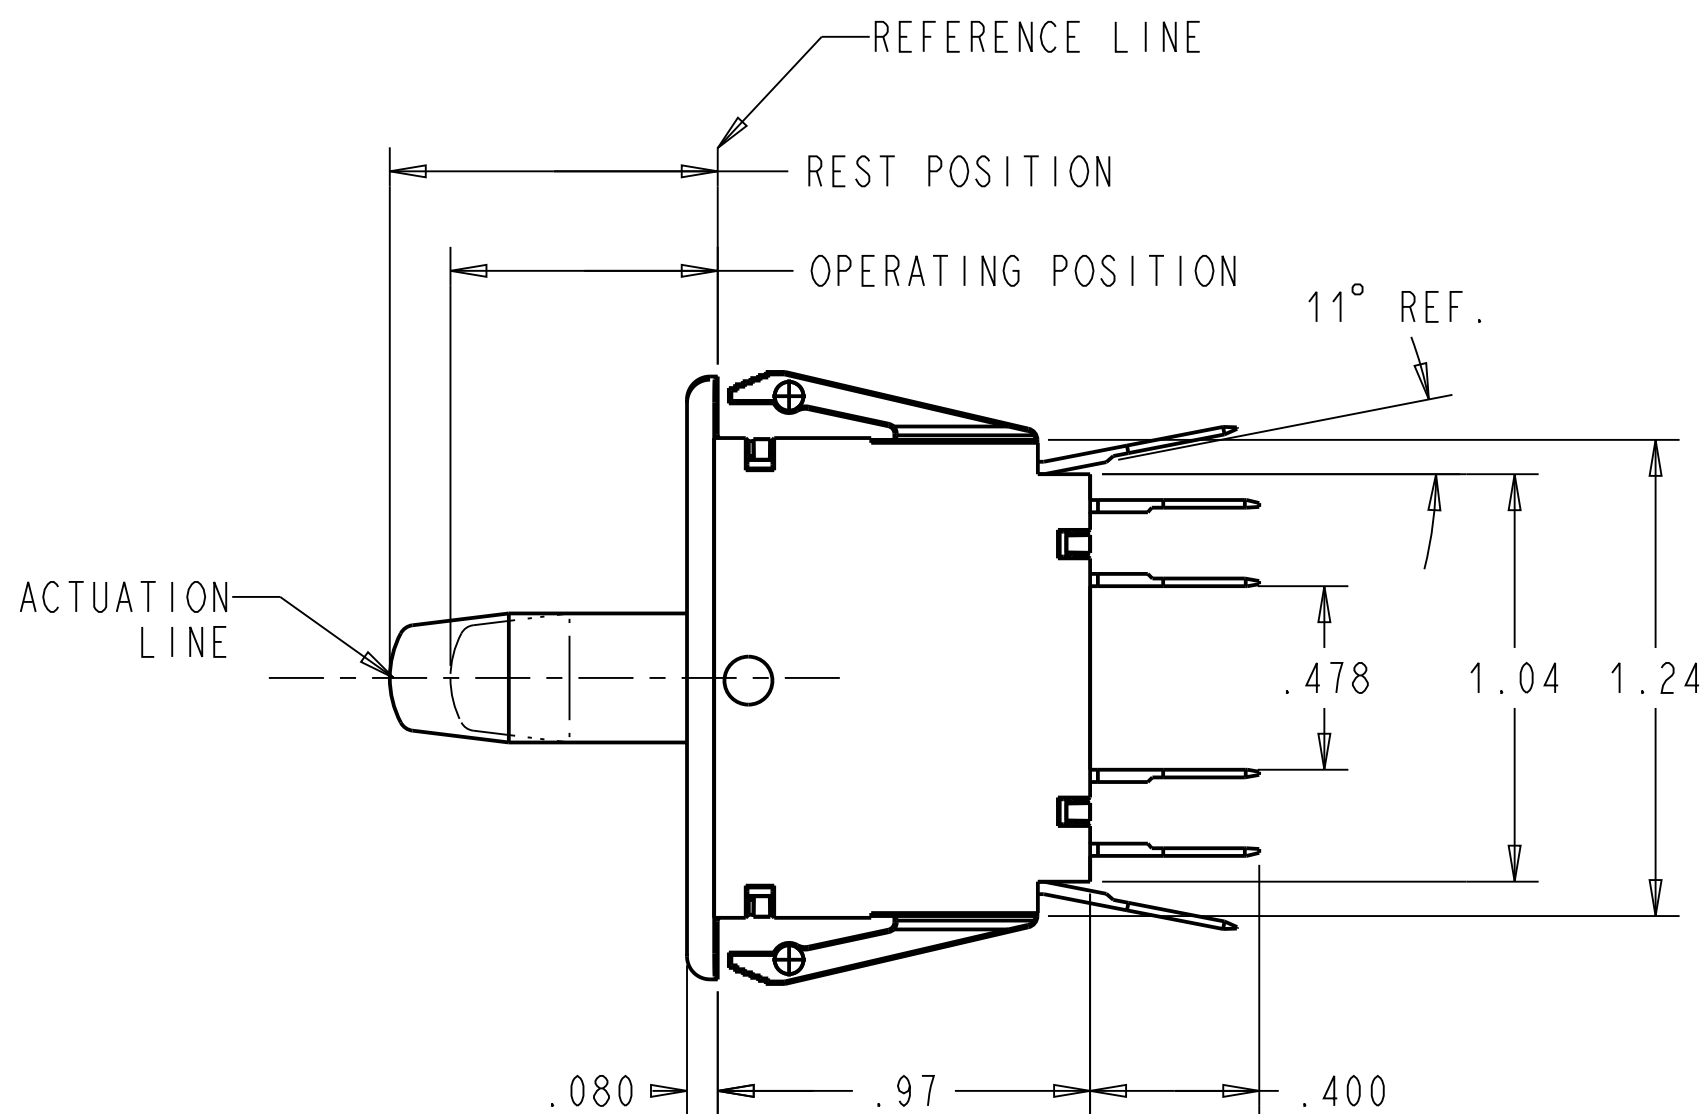


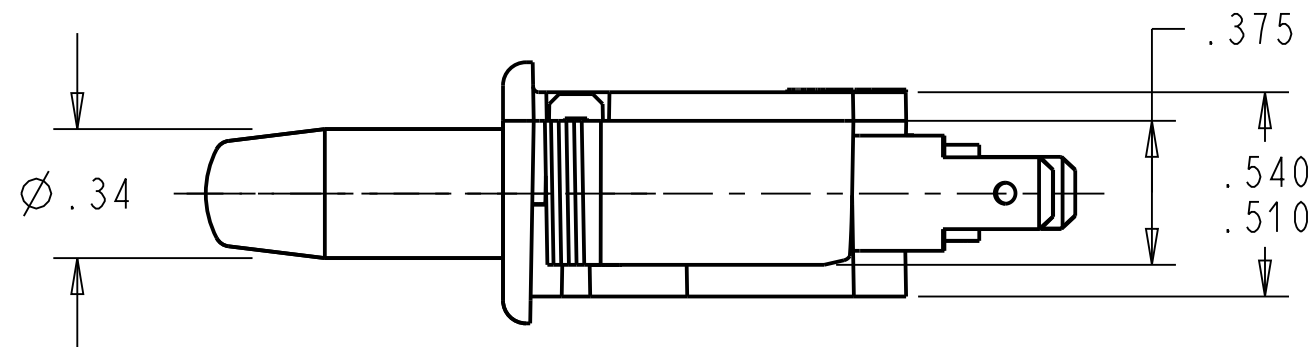

PANEL CUTOUT DETAIL
RECOMMENDED
PANEL THICKNESS
.045 - .100

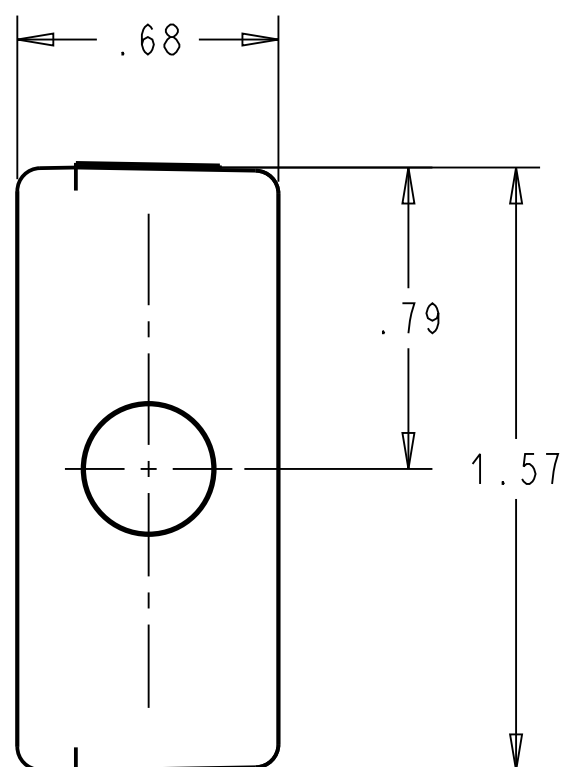

NOTES: (UNLESS OTHERWISE SPECIFIED):

1. SWITCH CHARACTERISTICS:

REST POSITION .845 TO .905
PRETRAVEL: .125 MAX.
OPERATING POSITION: .720 TO .820
OVER-TRAVEL: .375 MIN.
MOVEMENT DIFFERENTIAL: .075 MAX.
OPERATING FORCE grams. 680 MAX.
RELEASE FORCE grams. 170 MIN.

BUTTON POSITION
AT FULL OVERTRAVEL. .358 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
LINE AND MEASURED FROM THE REFERENCE LINE.


2. **us** ELECTRICAL RATINGS:
10 A, 125/250 VAC
1/3 HP 125/250 VAC

3. TERMINALS:
ARE .187 WIDE X .020 THICKNESS.

4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.


5. TEMPERATURE RATINGS: -40°C TO +85°C

6. COLORS: FACEPLATE: WHITE
BUTTON: WHITE

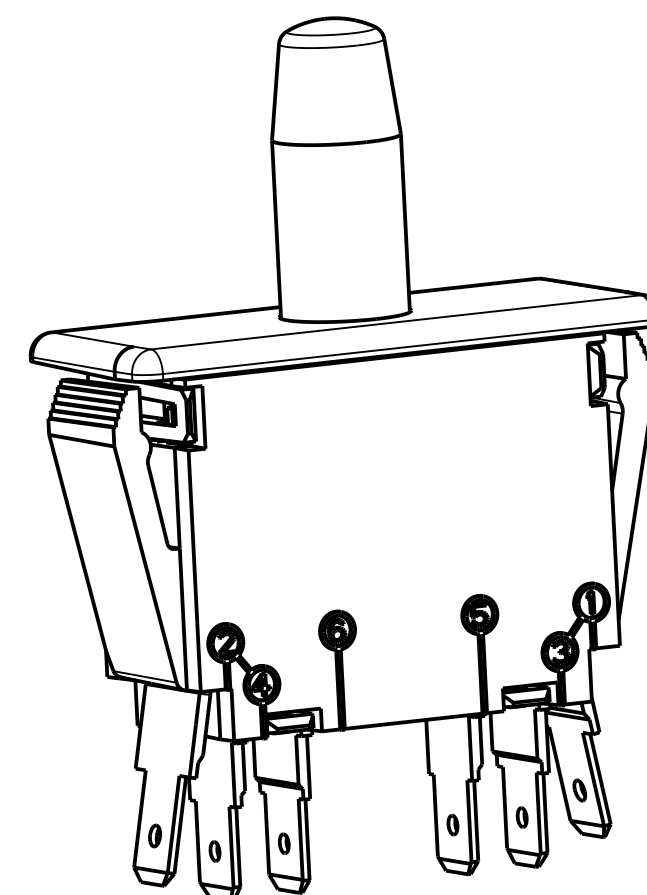

DWN: C RAMOS
APVD: A CARRILLO
DATE: 12-Feb-08

THIRD ANGLE PROJECTION



PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

C ITEM NO. 0E7900A0

SCALE: 2:1 SH 1 OF 1

REV	ECO NO.	DATE	PREP	APVD
J	Z000375478	10-Aug-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
4000000138	INCHES	± 0.02	± 0.015	± 5.0 °

TOLERANCE UNLESS SPECIFIED	DWG UNITS	X.XX	X.XXX	ANGLES
	INCHES	± 0.02	± 0.015	± 5.0 °

ORIGINAL ON PRO/E