

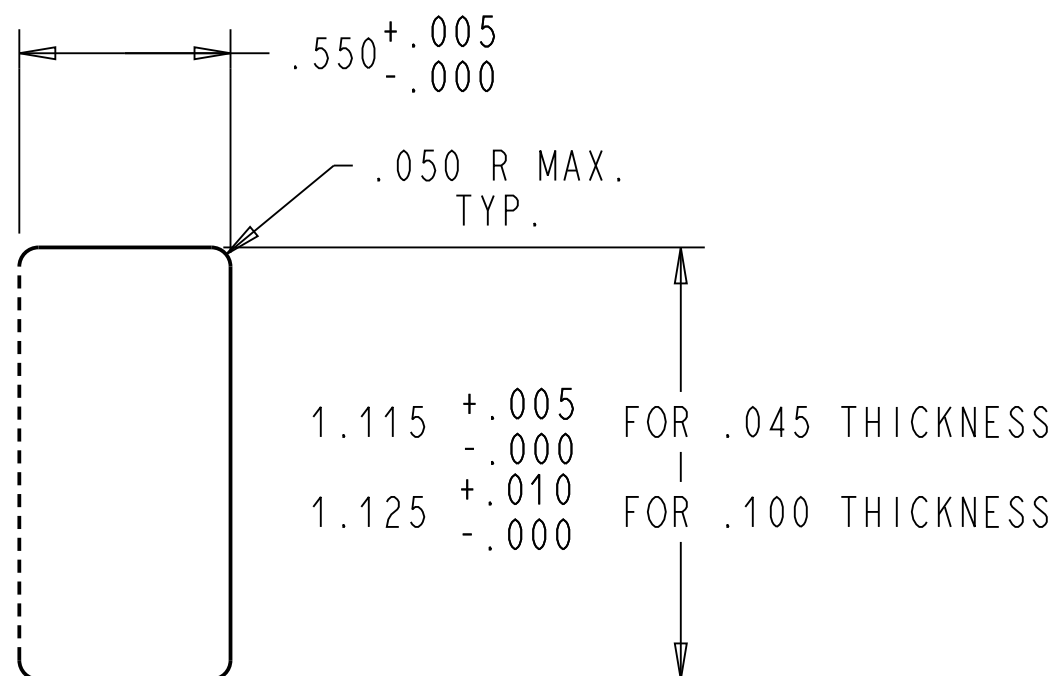
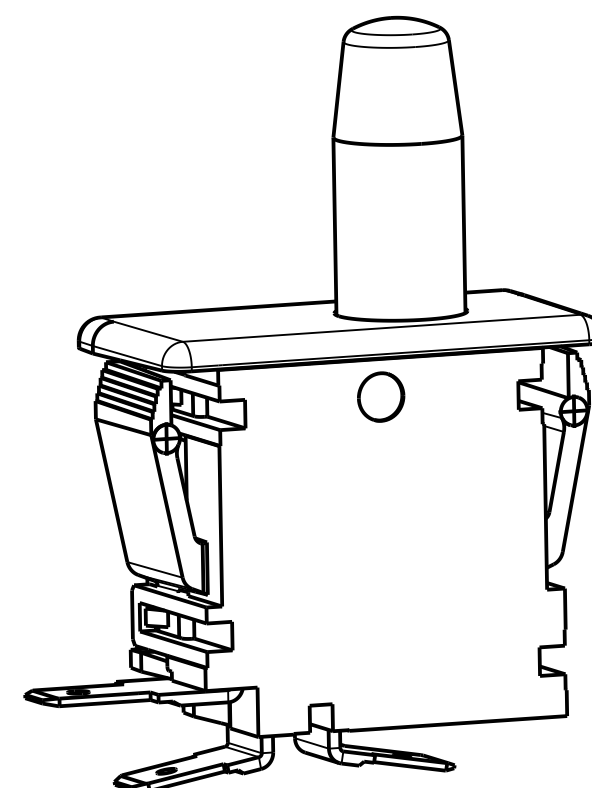
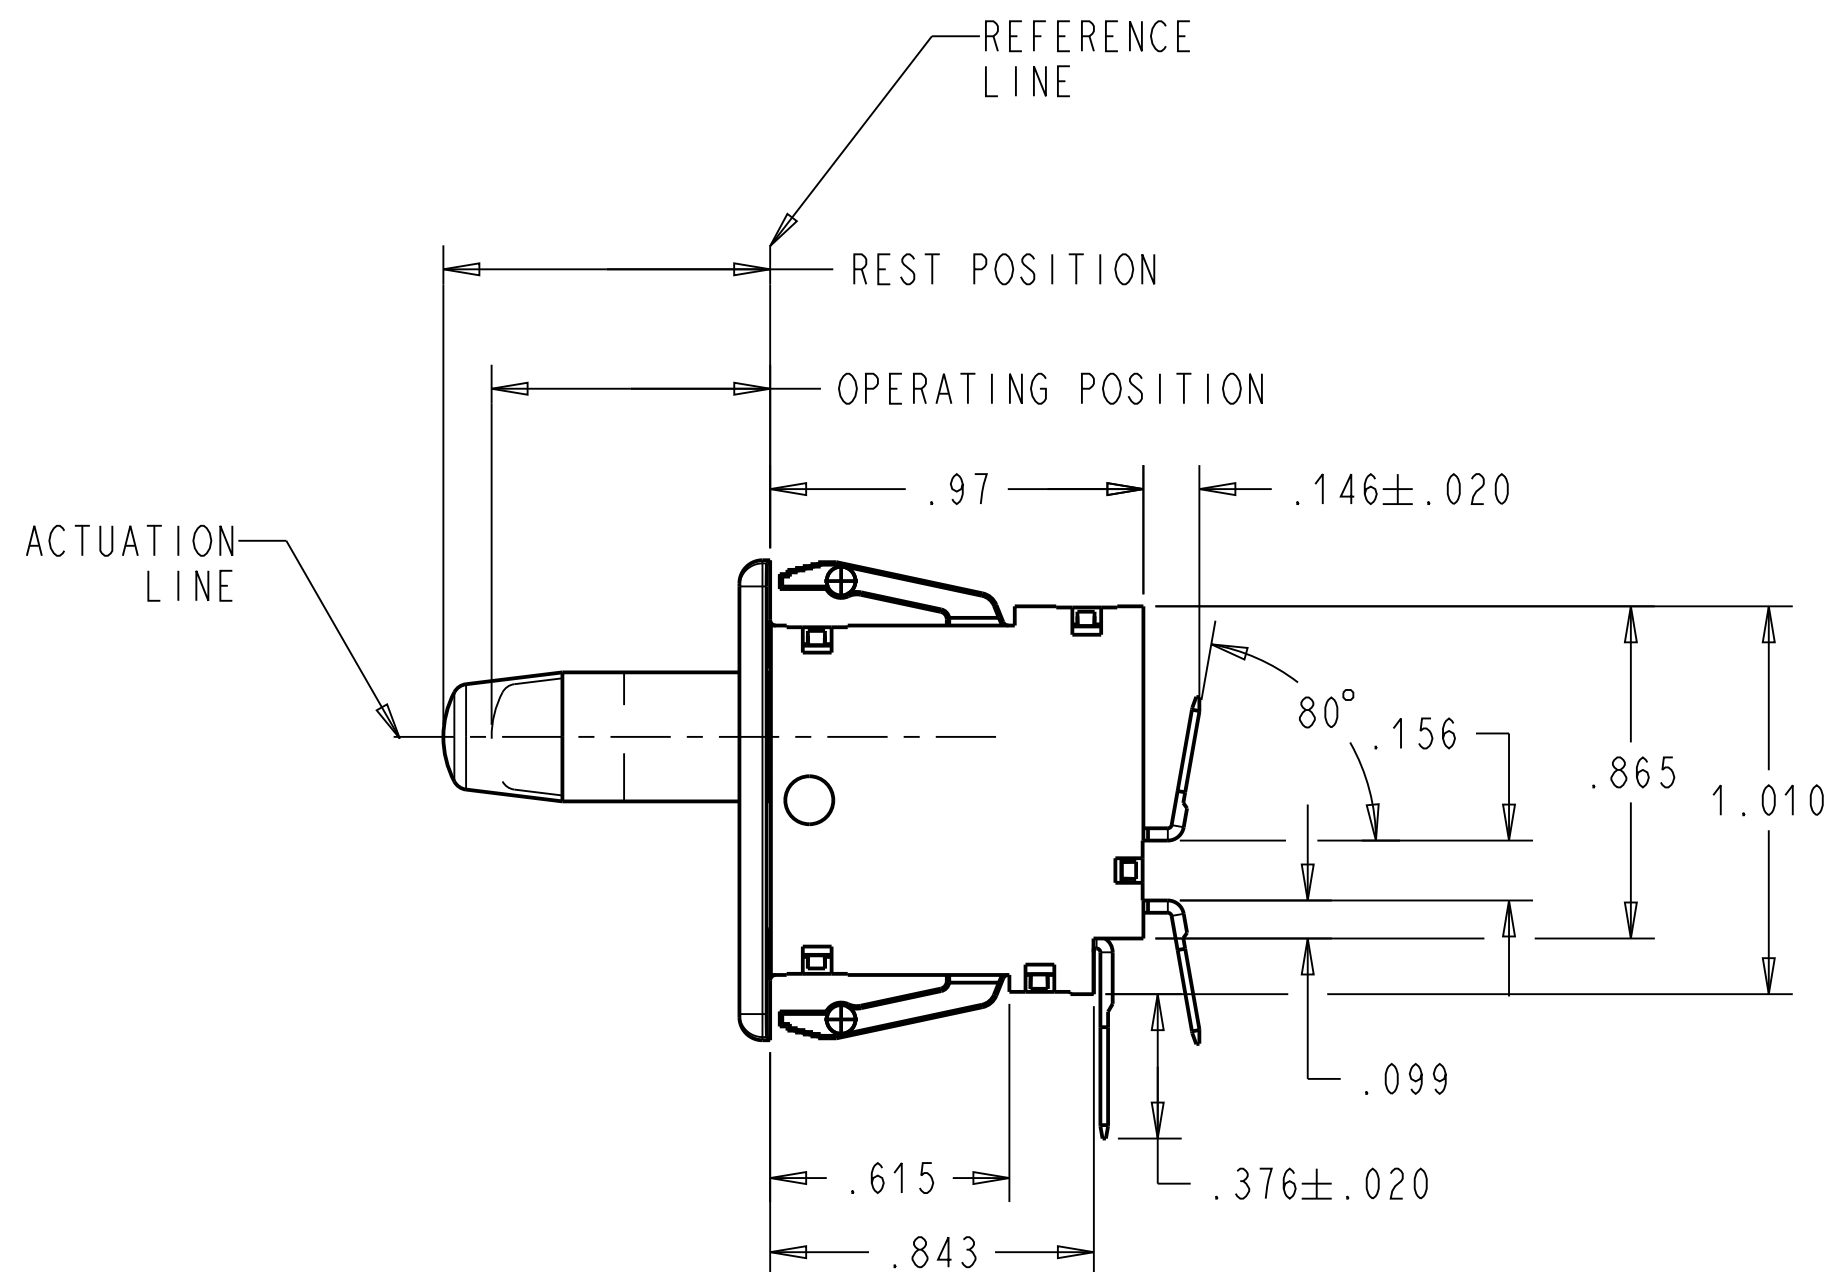


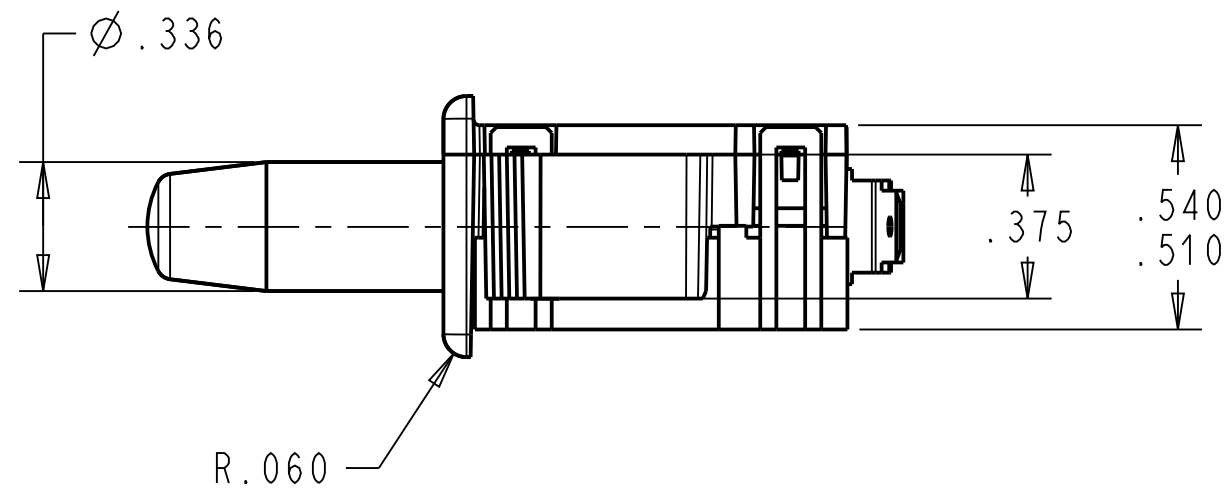

PANEL CUTOUT DETAIL
RECOMMENDED
PANEL THICKNESS
.045 - .100

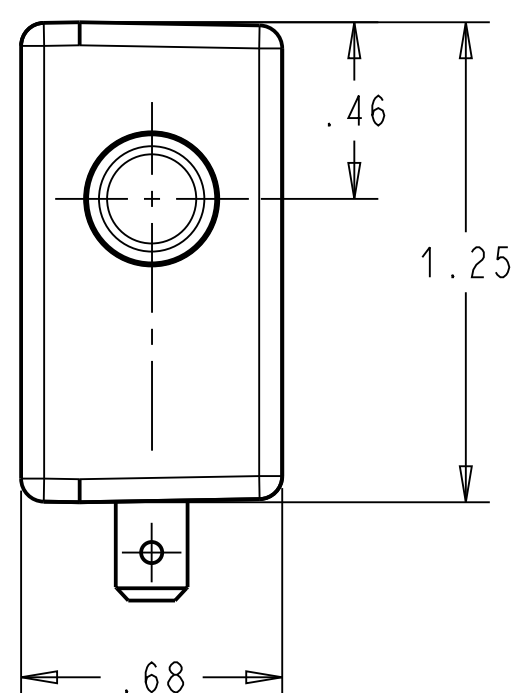

NOTES (UNLESS OTHERWISE SPECIFIED):

1. SWITCH CHARACTERISTICS:

REST POSITION: .845 TO .905
PRETRAVEL: .125 MAX.
OPERATING POSITION: .720 TO .820
OVER-TRAVEL: .375 MIN.
MOVEMENT DIFF: .045 MAX.
OPERATING FORCE grams 425 MAX.
RELEASE FORCE grams 85 MIN.

BUTTON POSITION
AT FULL OVERTRAVEL: .358 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
LINE AND MEASURED FROM THE REFERENCE LINE.

2. **UL** **us** ELECTRICAL RATING
10A, 125/250 VAC.
1/3 HP, 125/250VAC.

 10(4)A 250V, 50E3. 40T85


3. TERMINALS:
ARE .187 WIDTH X .020 THICKNESS.

4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.

6. TEMPERATURE RATING: -40°C TO +85°C

7. COLORS: FACEPLATE- WHITE
BUTTON-WHITE

DWN: J. DOLNIK
APVD: RC
DATE: 28-APR-03
THIRD ANGLE PROJECTION



B	Z000375241	2025-03-25	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	4000000138
--------------	------------

TOLERANCE UNLESS SPECIFIED	DWG UNITS	X.XX	X.XXX	ANGLES
	INCHES	± 0.02	± 0.015	± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

C ITEM NO. 0F69-66A0

SCALE: 1.000 SH 1 OF 1