


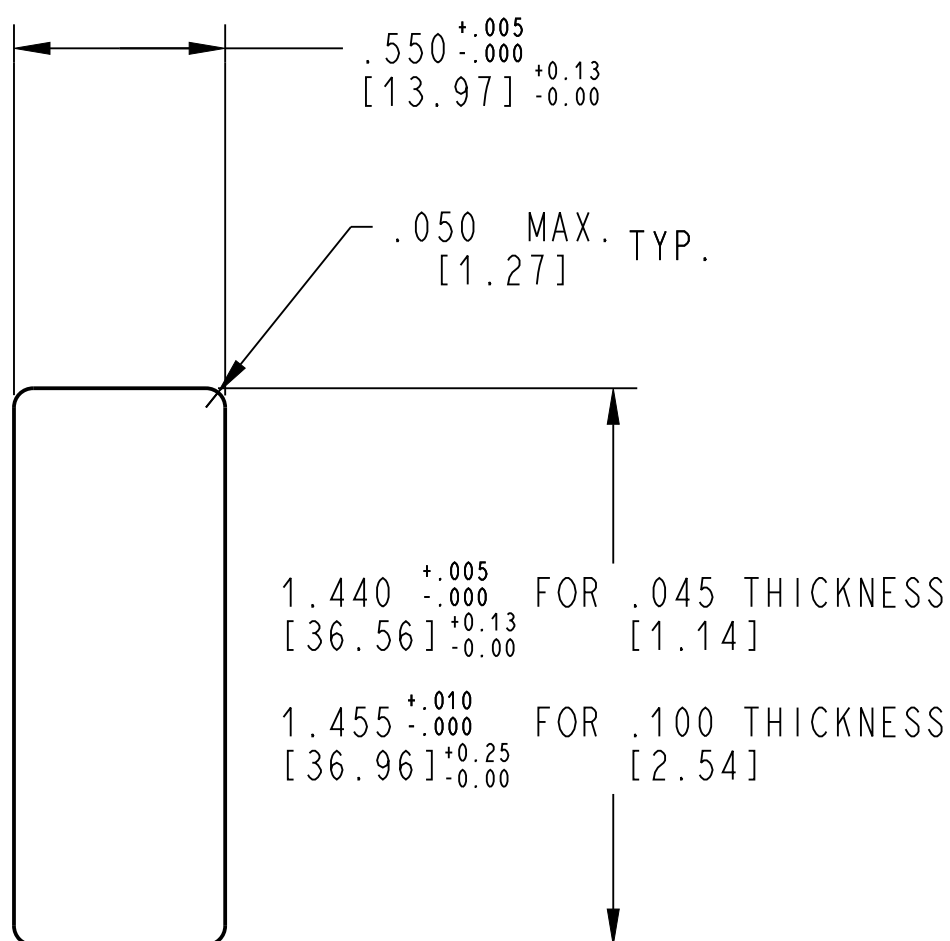
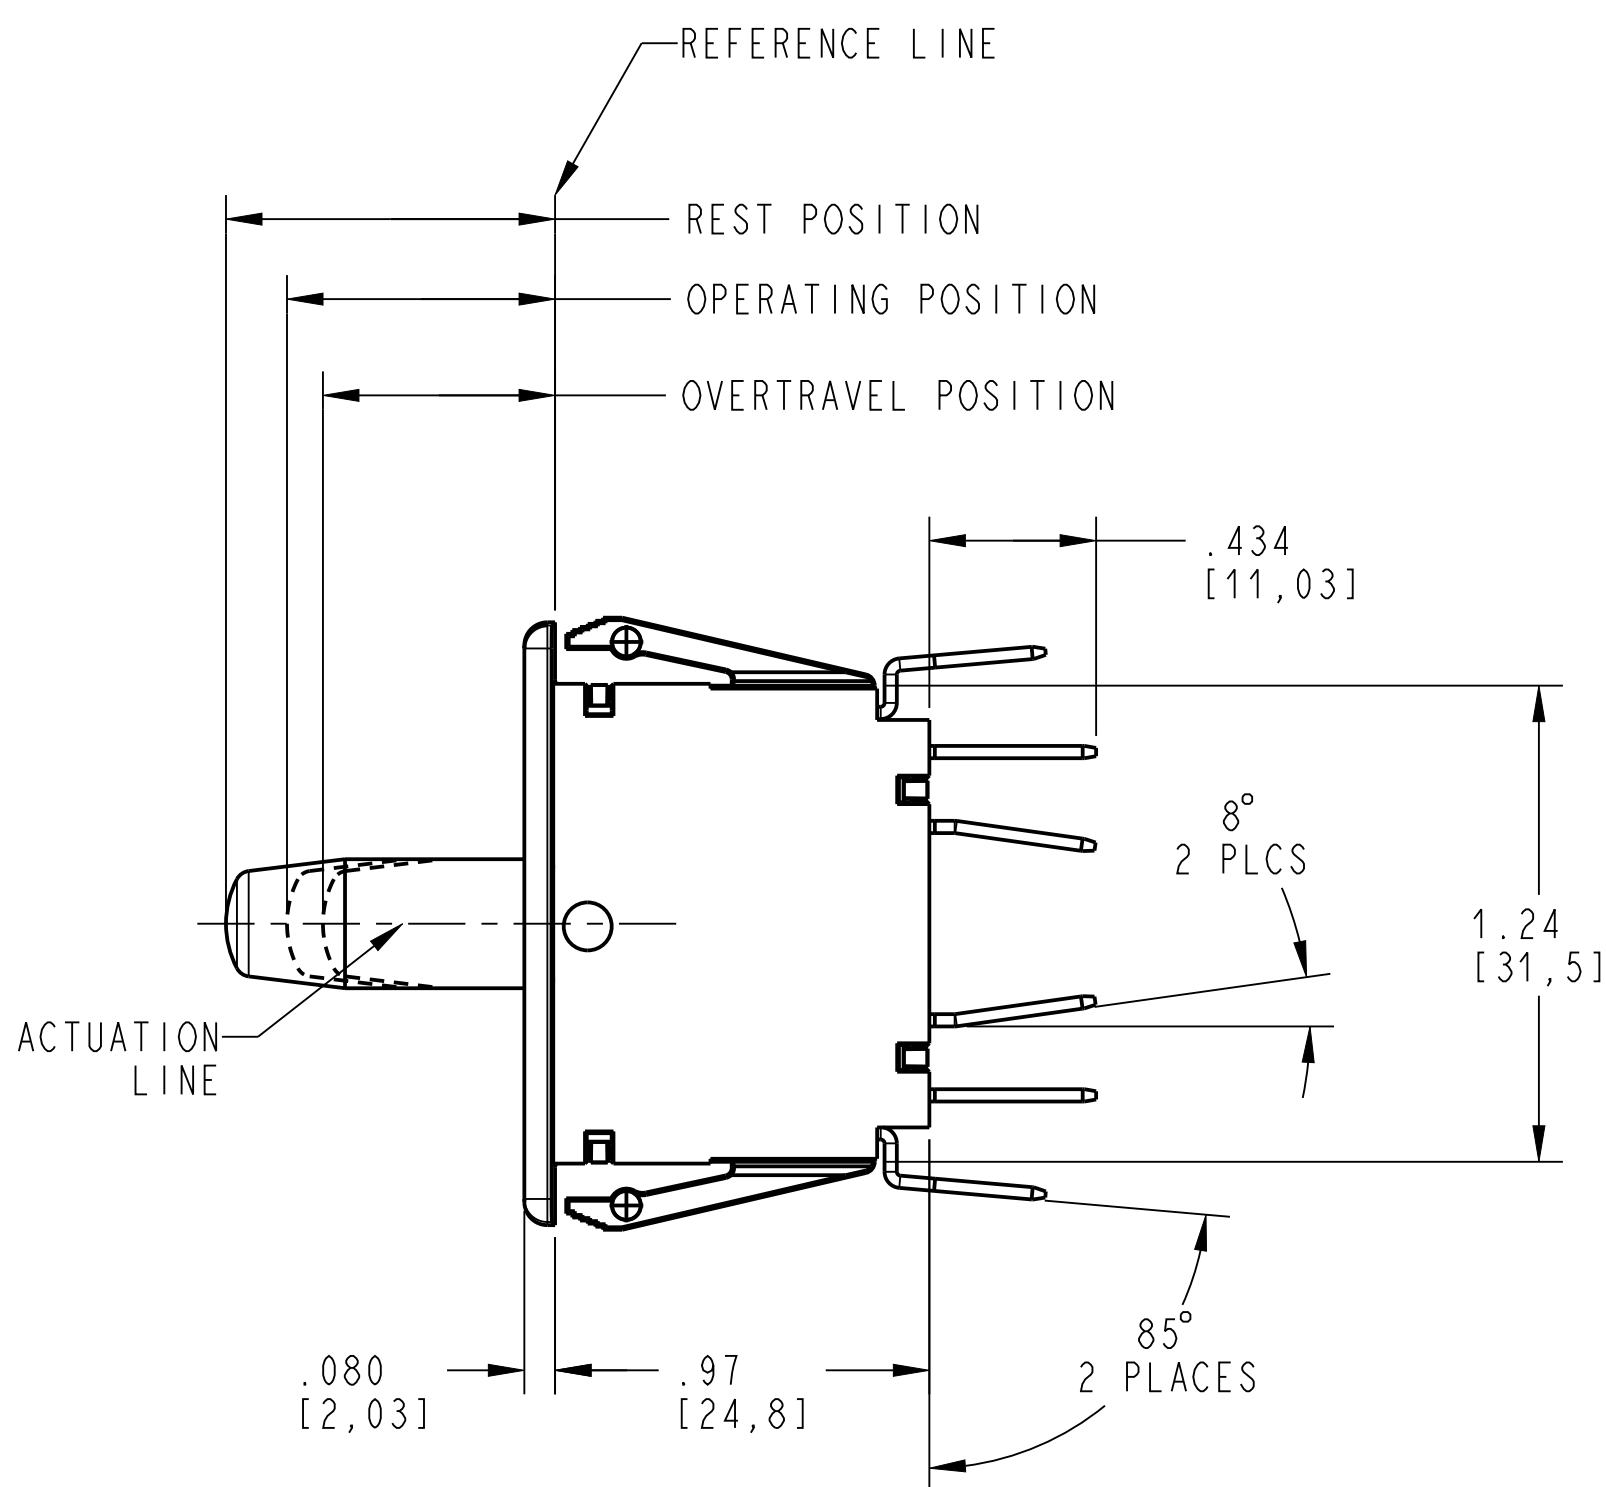


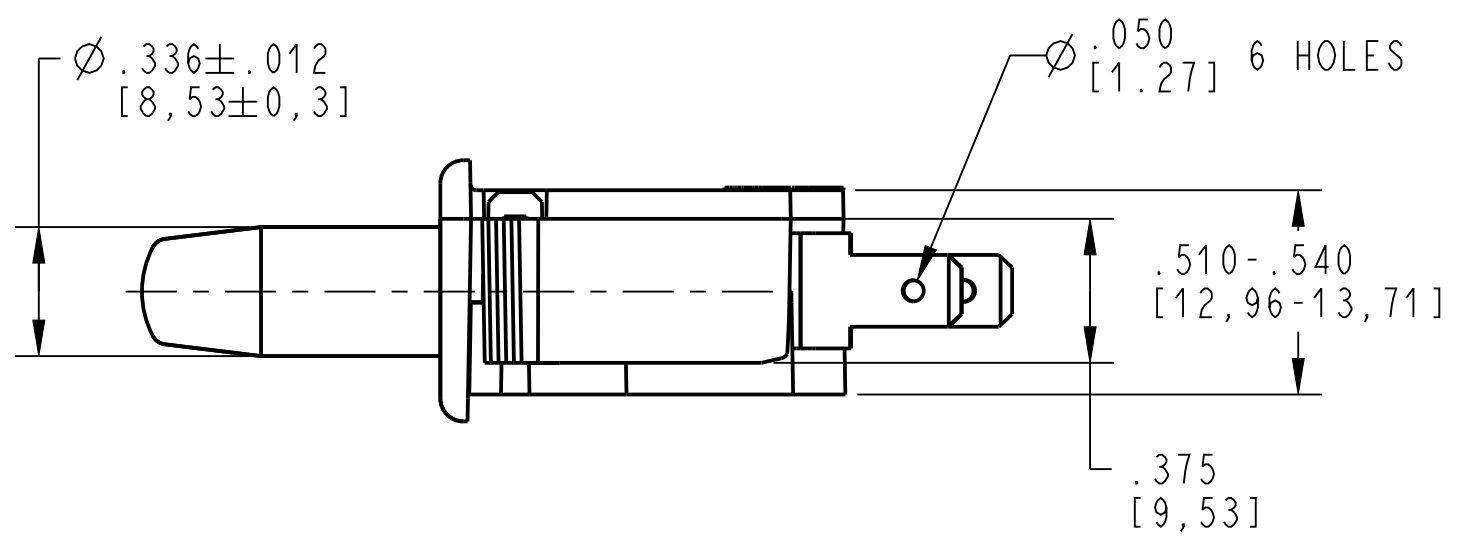

PANEL CUTOUT DETAIL
RECOMMENDED
PANEL THICKNESS
.045 - .100
[1.14]- [2.54]

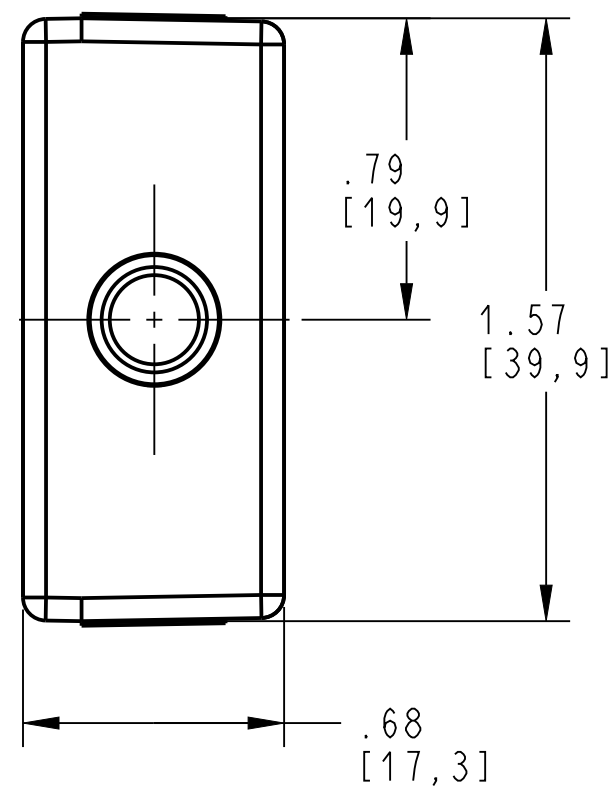

- NOTES: (UNLESS OTHERWISE SPECIFIED)
- SWITCH CHARACTERISTICS:
REST POSITION: .845 [21.46] TO .905 [22.99]
PRETRAVEL: .125 [3.18] MAX.
OPERATING POSITION: .720 [18.29] TO .820 [20.83]
OVER-TRAVEL: .375 [9.53] MIN.
MOVEMENT DIFFERENTIAL: .075 [1.91] MAX.
OPERATING FORCE grams 680 MAX.
RELEASE FORCE grams 170 MIN.
 - BUTTON POSITION
AT FULL OVERTRAVEL. .358 [9.09] MAX.
 - ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
 - ELECTRICAL RATING:
10 A, 125/250 VAC
1/3HP, 125/250 VAC.
 - 10(4) A 250V, 50E3, 40T85.
 - TERMINALS:
ARE .187 WIDTH x .032 THICKNESS.
 - RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
 - TEMPERATURE RATINGS: -40°C TO 85°C
 - COLORS:
FACEPLATE: WHITE
COVER: WHITE
BUTTON: WHITE

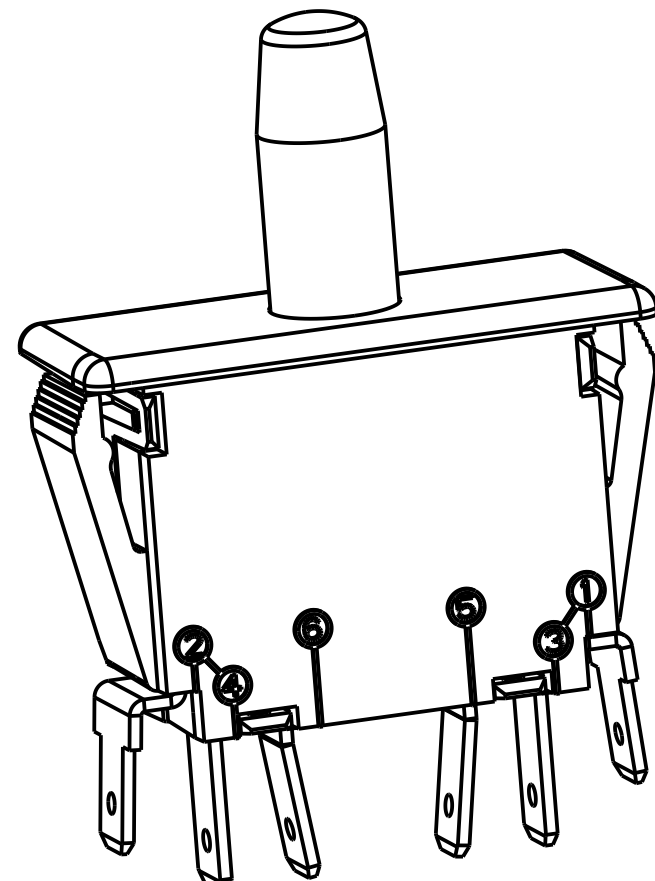

DWN: T. KULACK				ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION SPECIFICATION DRAWING			
APVD: BEB							
DATE: 2013-09-25							
THIRD ANGLE PROJECTION							
							
				TOLERANCE UNLESS SPECIFIED			
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES		
4000000138		INCH/MM	± 0.02	± 0.015	± 5.0 °		
0		C		ITEM NO.		0F79-00A0	
SCALE:		2:1		SH		1 OF 1	
4		1		3		2	
						1	
						1	

ORIGINAL ON PRO/E