
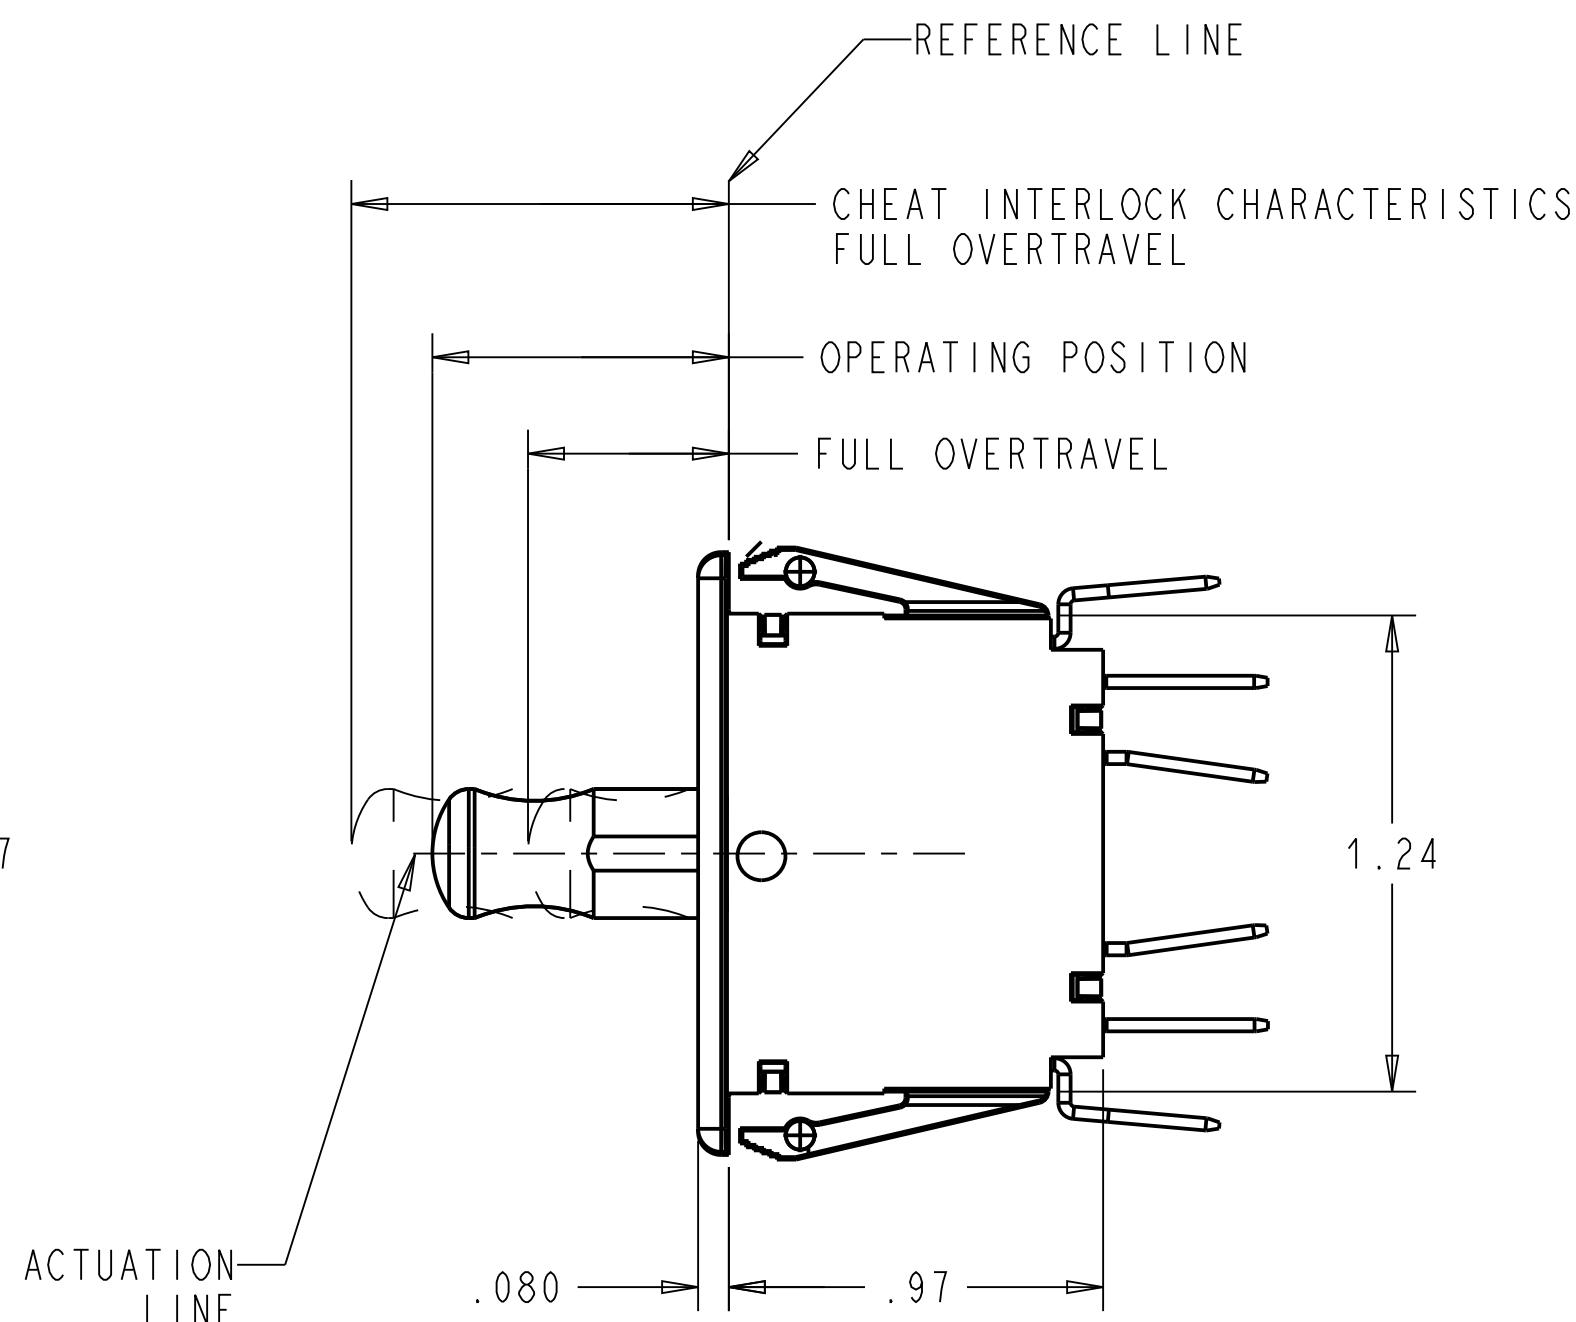
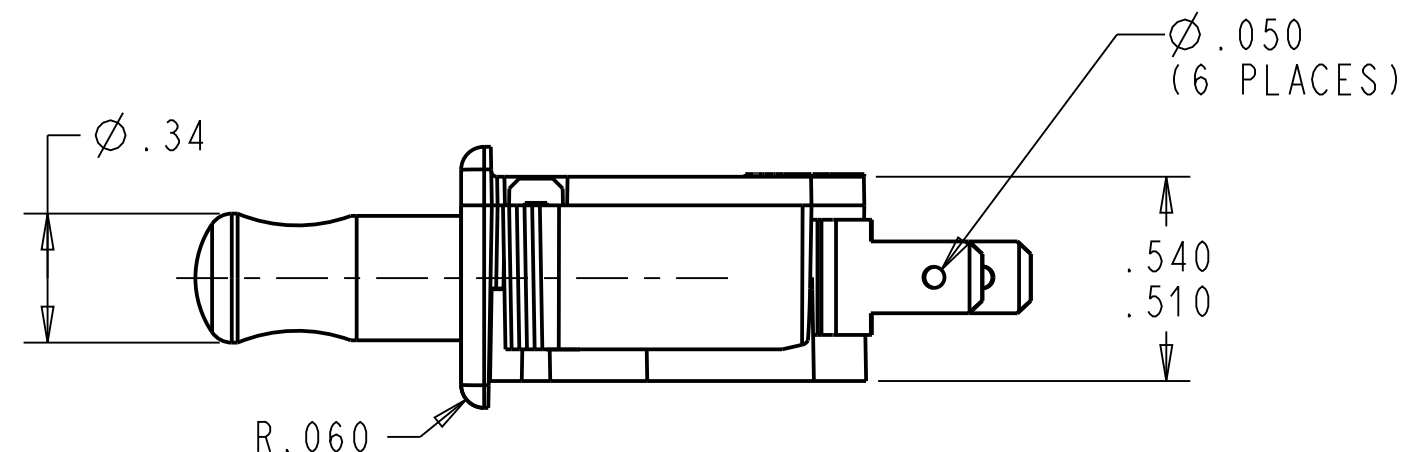
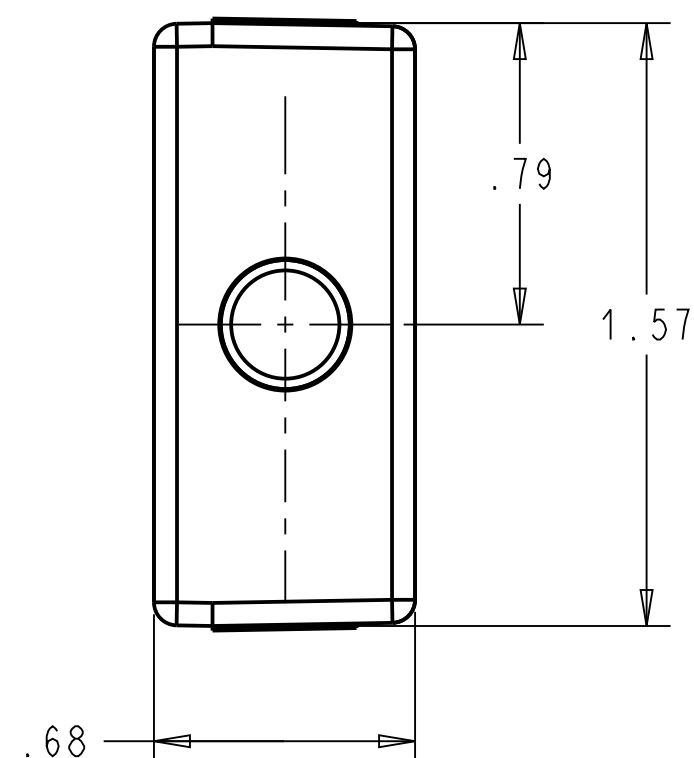


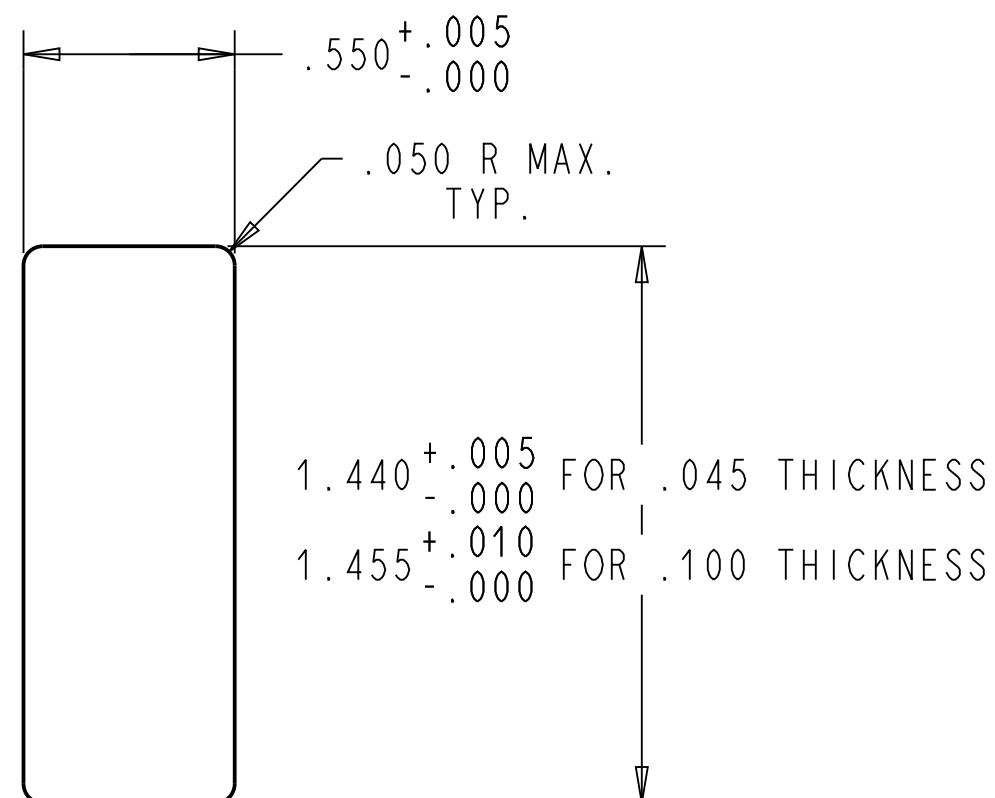

NOTES: (UNLESS OTHERWISE SPECIFIED):

1. SWITCH CHARACTERISTICS:

REST POSITION .730 TO .790
PRETRAVEL: .125 MAX.
OPERATING POSITION: .610 TO .710
OVER-TRAVEL: .100 MIN.
MOVEMENT DIFFERENTIAL: .075 MAX.
OPERATING FORCE grams. 737 MAX.

BUTTON POSITION
AT FULL OVERTRAVEL. .520 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
LINE AND MEASURED FROM THE REFERENCE LINE.

CHEAT INTERLOCK CHARACTERISTICS:

OPERATING POS. ----- .800 TO .900
PRE-TRAVEL ----- .155 MAX.
OVERTRAVEL ----- .030 MIN.
MOVE DIFF. ----- .090 MAX.
OPERATING FORCE grams --- 800 MAX.
FULL OVER-TRAVEL: ----- .980 MAX.

2. **UL** ELECTRICAL RATINGS:

10 A, 125/250 VAC
1/3 HP 125/250 VAC

(K) **UL** 10(4) A 250V, 50E3, 40T85.


3. TERMINALS:

ARE .187 WIDE X .032 THICKNESS.

4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.


5. TEMPERATURE RATINGS: -40°C TO +85°C

6. ELECTRICAL LIFE AT RATED LOAD: 100,000 CYCLES
SIGNIFIED WITH (L).

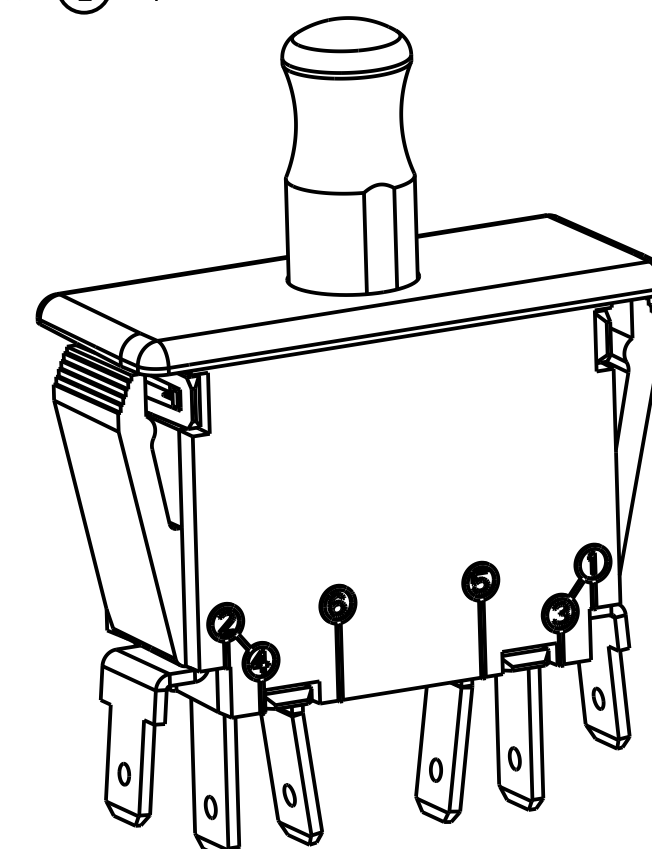

DWN: EV
APVD: GJP
DATE: 1995-09-05

THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

K	Z000714808	2023-11-30	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	4000000138
--------------	------------

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.015	± 5.0 °

C	ITEM NO.	OF79-30A0
SCALE:	2:1	SH 1 OF 1