

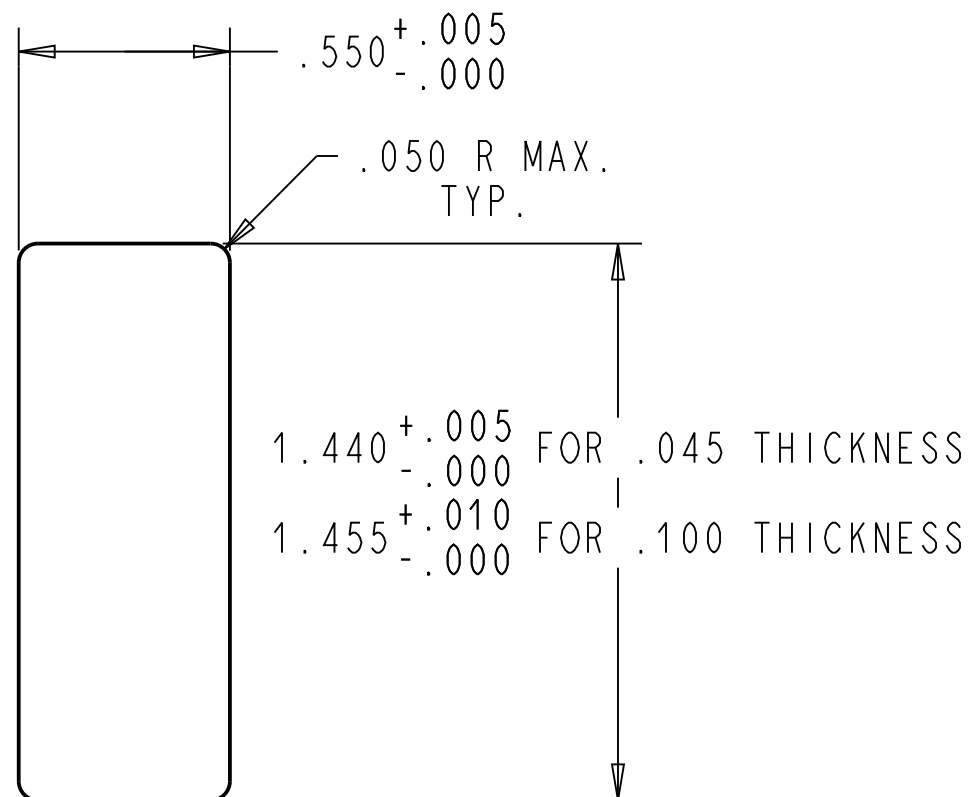
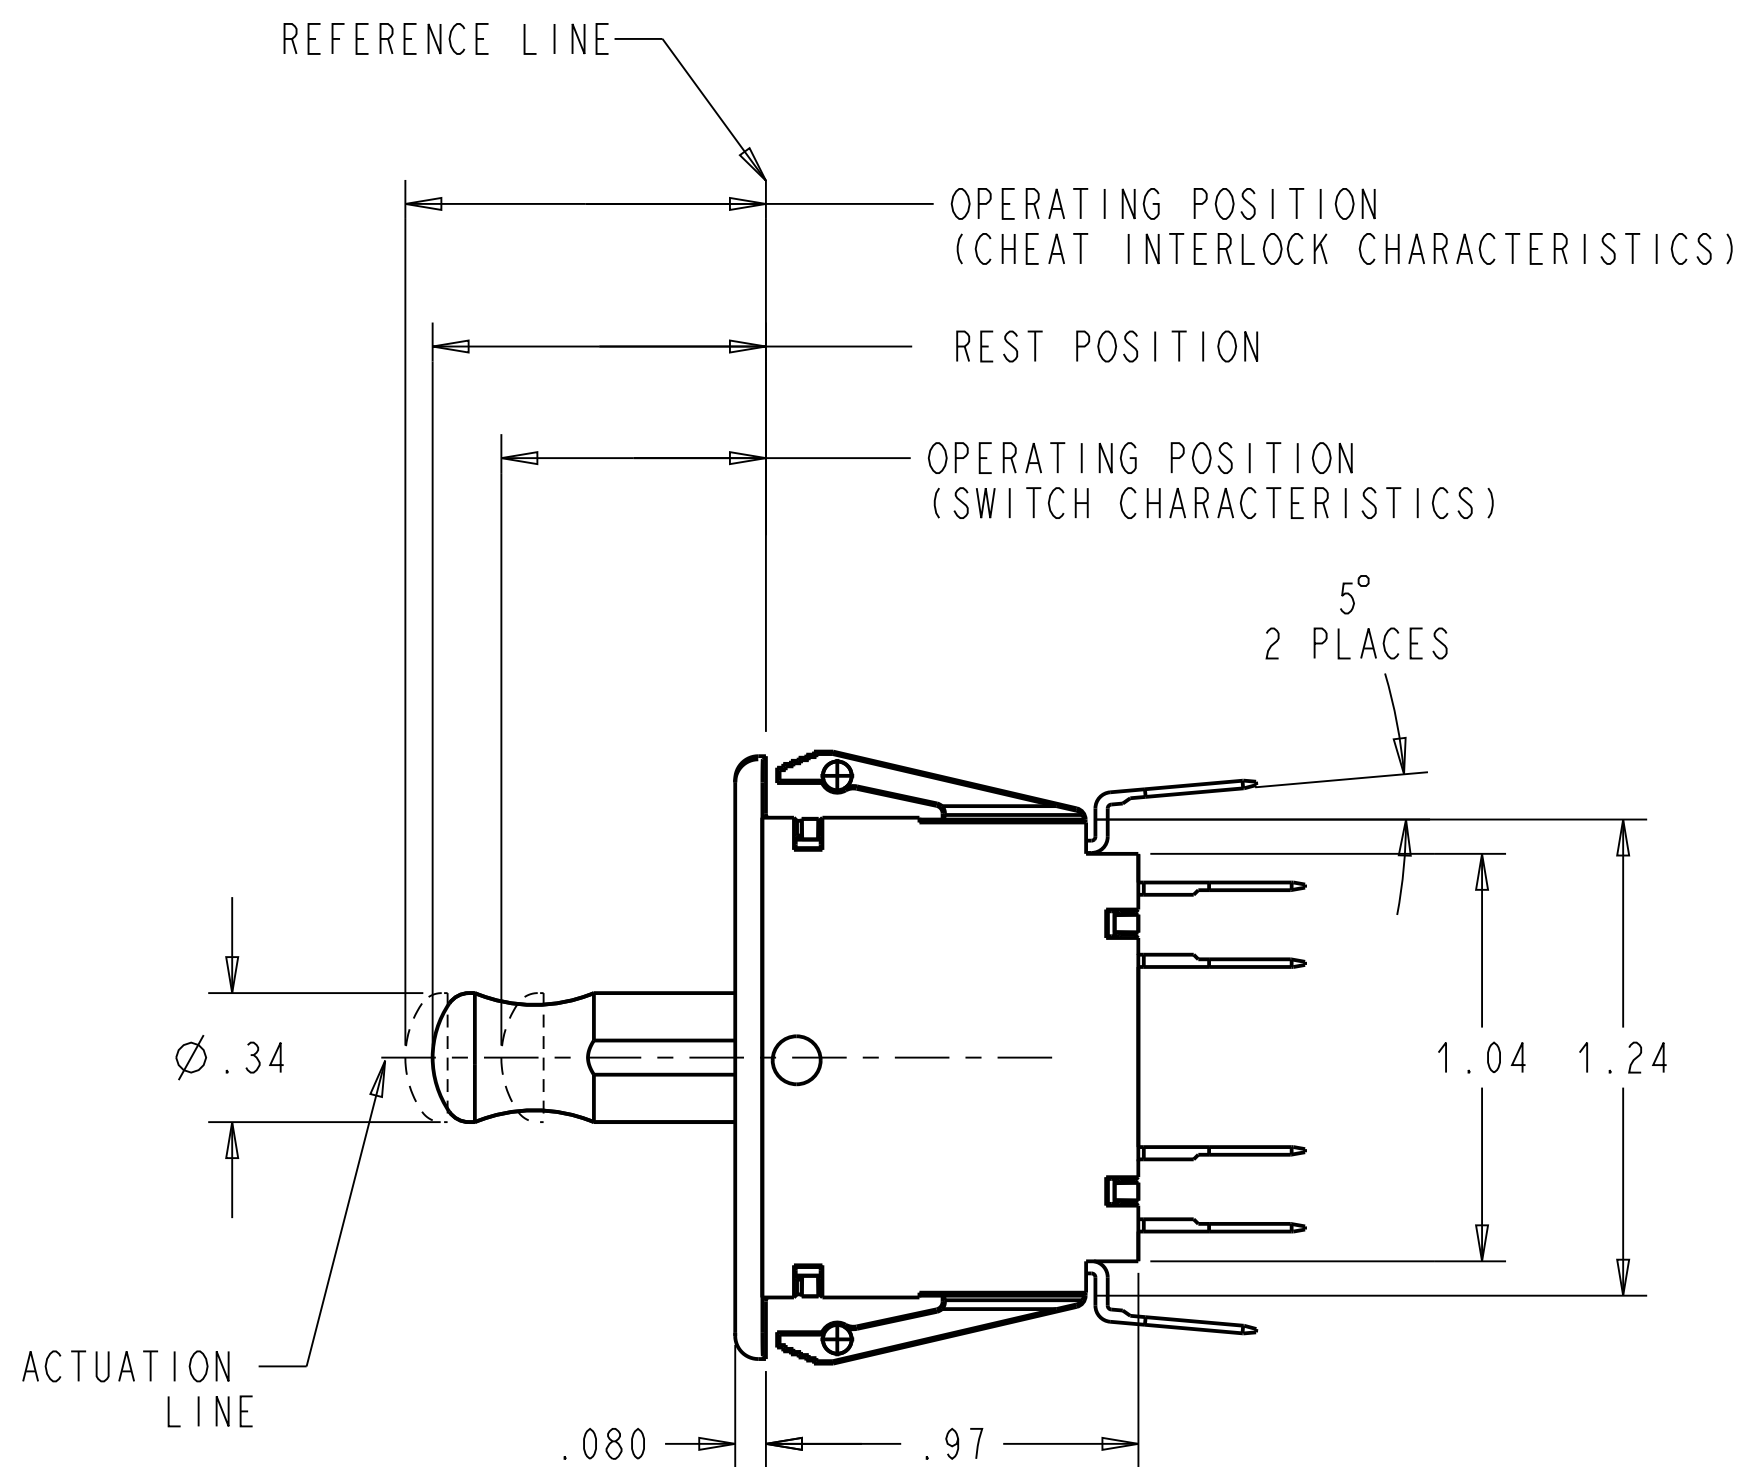


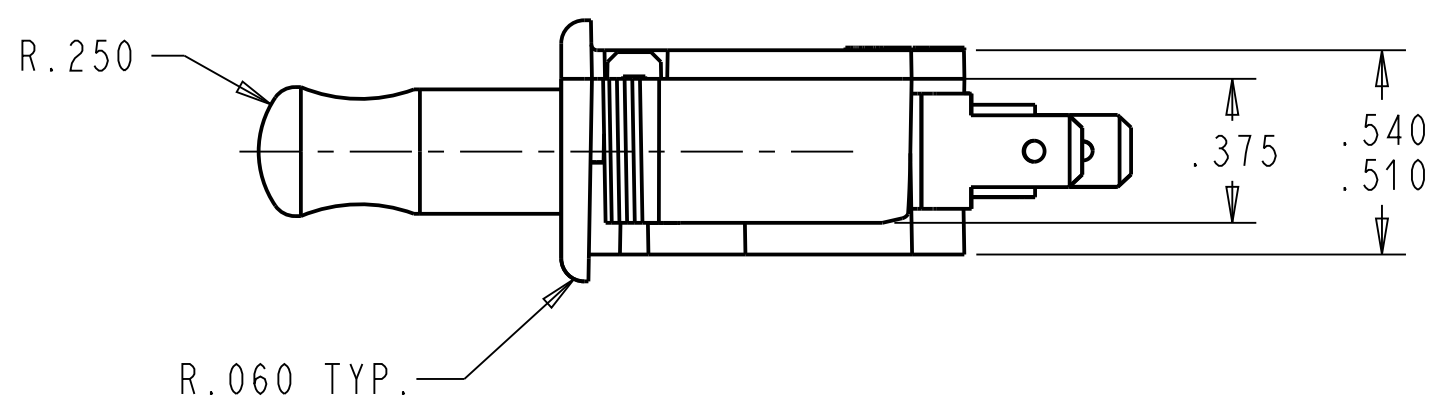

PANEL CUTOUT DETAIL
RECOMMENDED
PANEL THICKNESS
.045-.100

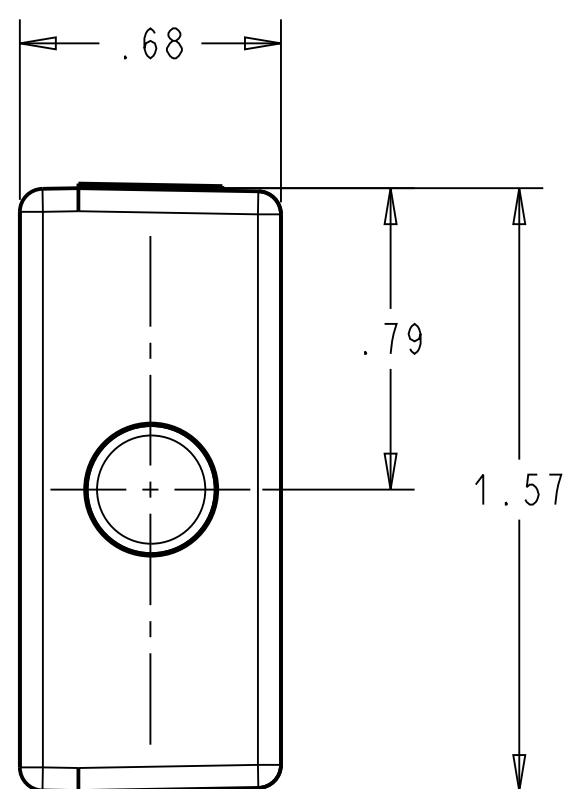

NOTES (UNLESS OTHERWISE SPECIFIED):

1. SWITCH CHARACTERISTICS:

REST POSITION: .730 TO .790
PRETRAVEL: .125 MAX.
OPERATING POSITION: .610 TO .710
OVER-TRAVEL: .100 MIN.
MOVEMENT DIFF: .075 MAX.
OPERATING FORCE grams: 737 MAX.

BUTTON POSITION
AT FULL OVERTRAVEL: .520 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
LINE AND MEASURED FROM THE REFERENCE LINE.

CHEAT INTERLOCK CHARACTERISTICS:

REST POSITION: .730 TO .790
PRETRAVEL: .155 MAX.
OPERATING POSITION: .800 TO .900
OVER-TRAVEL: .030 MIN.
MOVEMENT DIFF: .090 MAX.
FULL OVERTRAVEL: .980 MAX.
OPERATING FORCE grams: 800 MAX.


2. **UL** **Us** ELECTRICAL RATING:
10 A, 125/250 VAC
1/3 HP, 125/250 VAC.

(E) **UL** 10(4) A 250V, 50E3, 40T85.

3. TERMINALS:
ARE .187 WIDTH x .020 THICKNESS.


4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC.

5. TEMPERATURE RATING:
-40°C TO +85°C

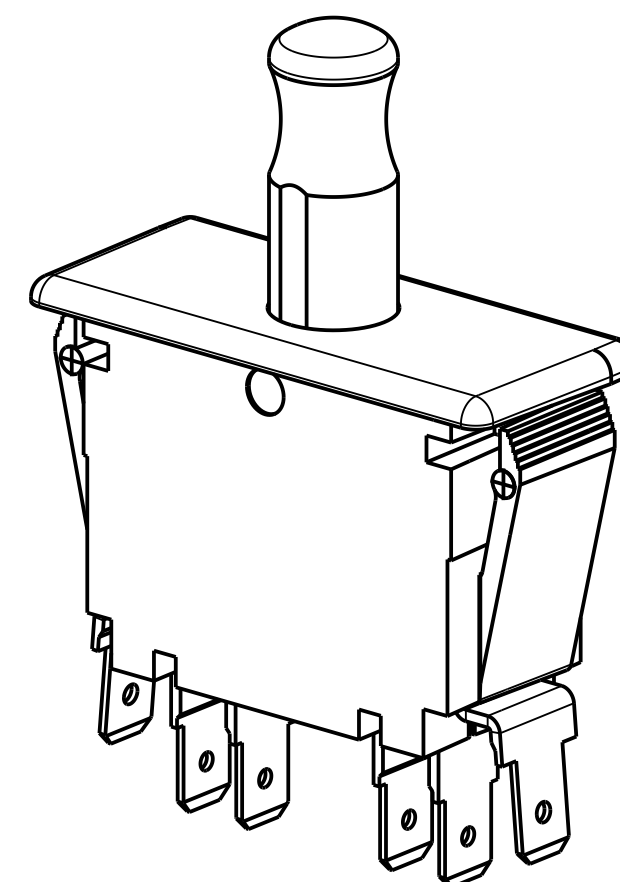

DWN: J. DOLNIK
APVD: RC
DATE: 2003-04-28

THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

REV	ECO NO.	DATE	PREP	APVD
E	Z000714808	2023-11-30	TCH	ELL

PROJECT / CSR	DWG UNITS	X.XX	X.XXX	ANGLES
4000000138	INCH	± 0.02	± 0.015	± 5.0 °

TOLERANCE UNLESS SPECIFIED	DWG UNITS	X.XX	X.XXX	ANGLES
	INCH	± 0.02	± 0.015	± 5.0 °

C	ITEM NO.	OF 79-66A0
SCALE:	2:1	SH 1 OF 1

ORIGINAL ON PRO/E