

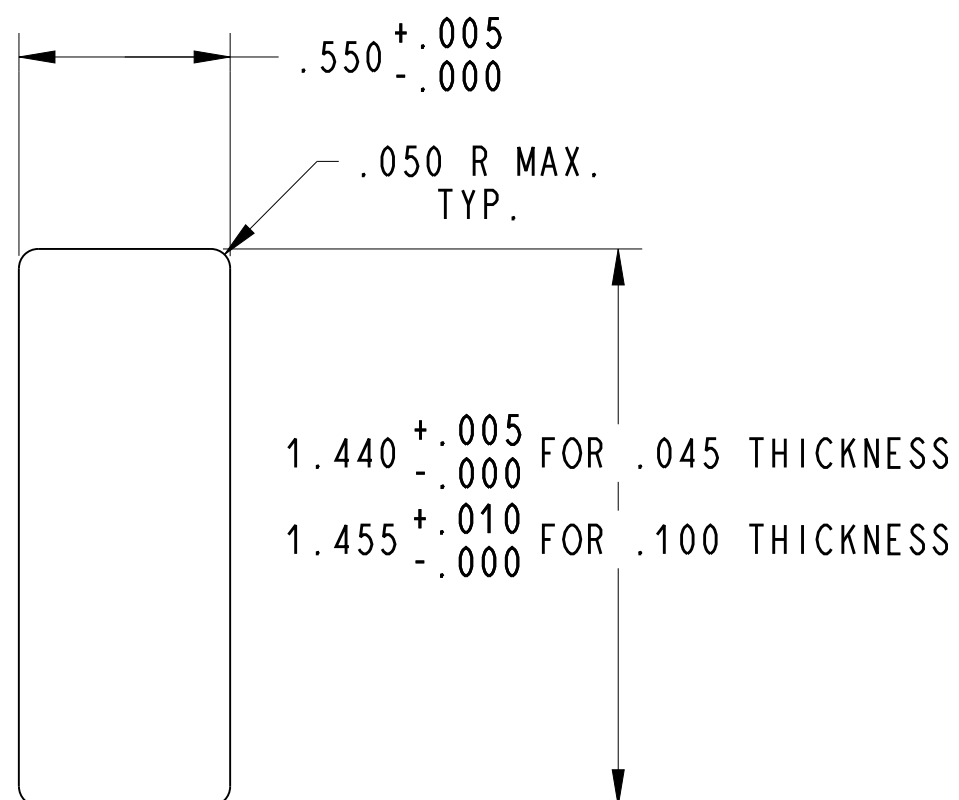
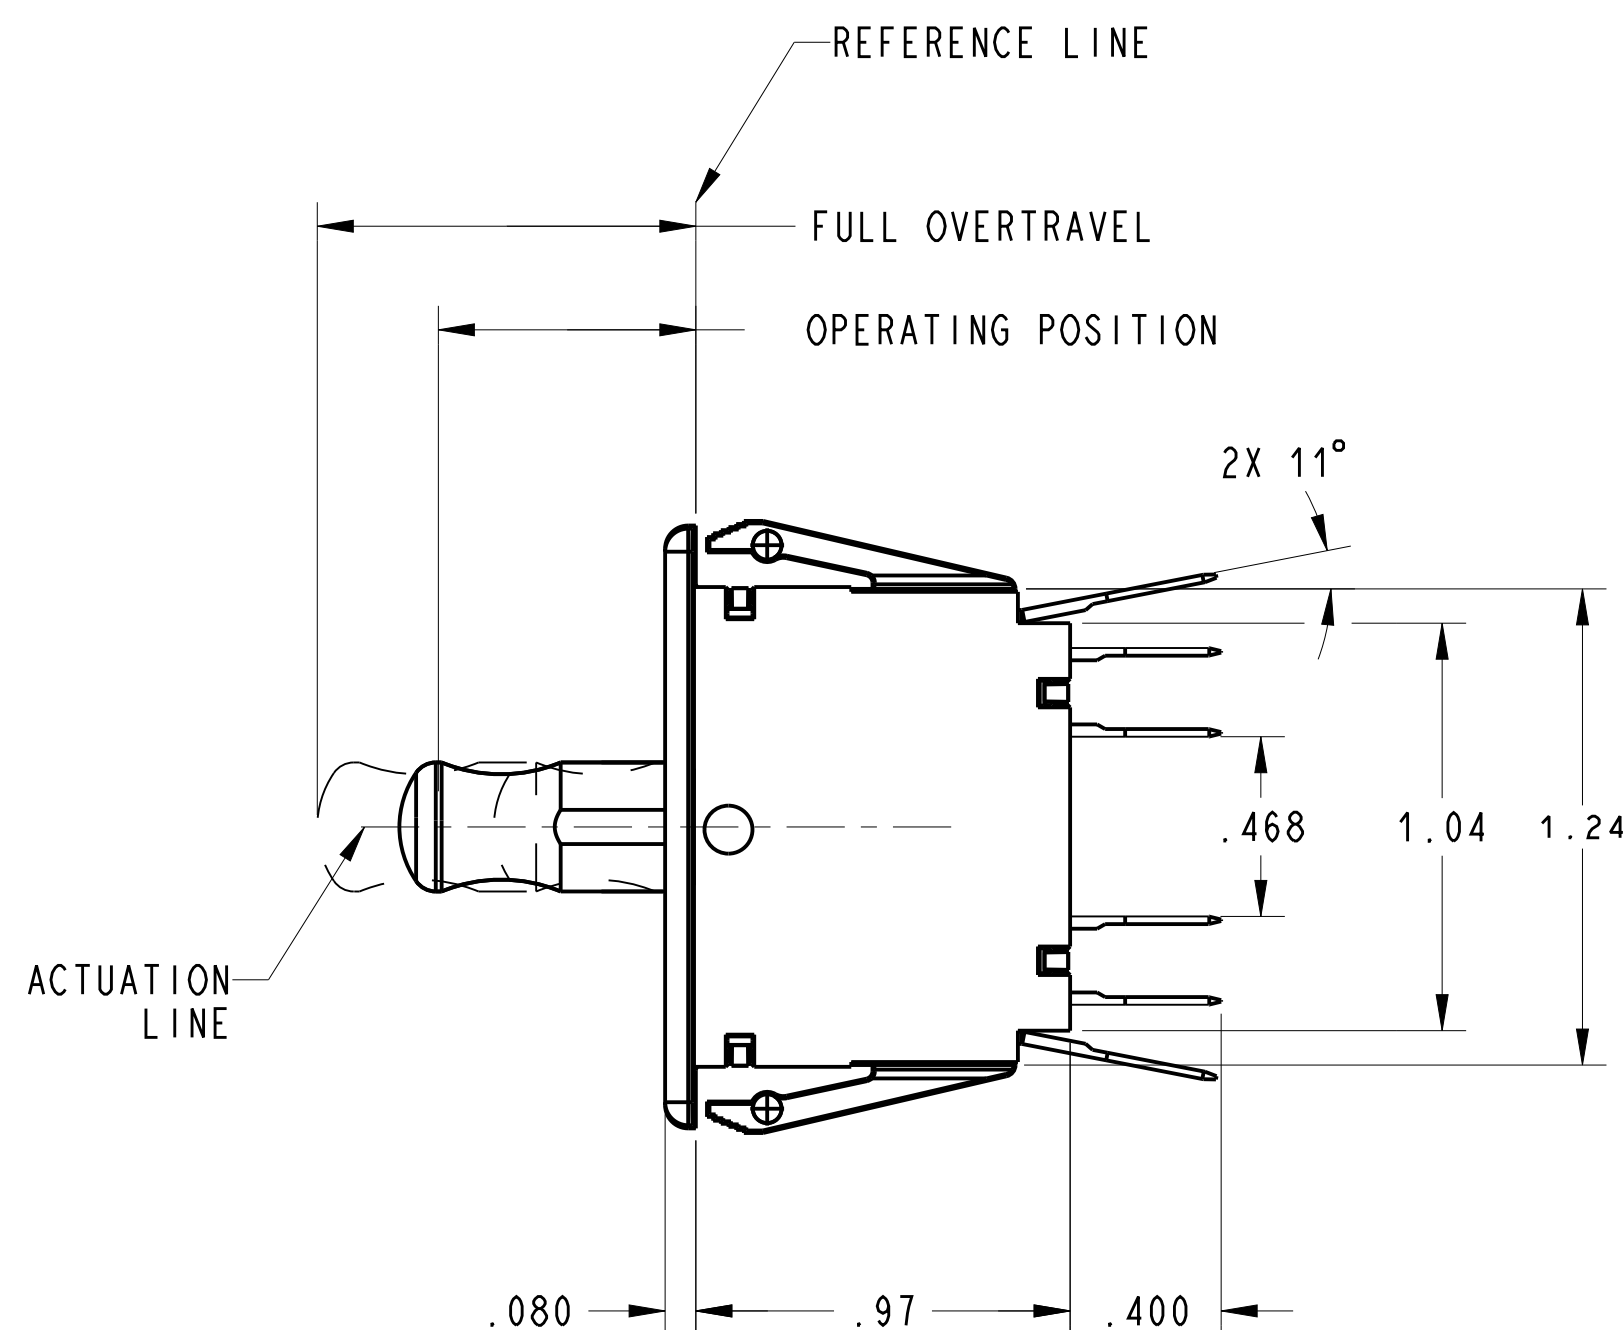


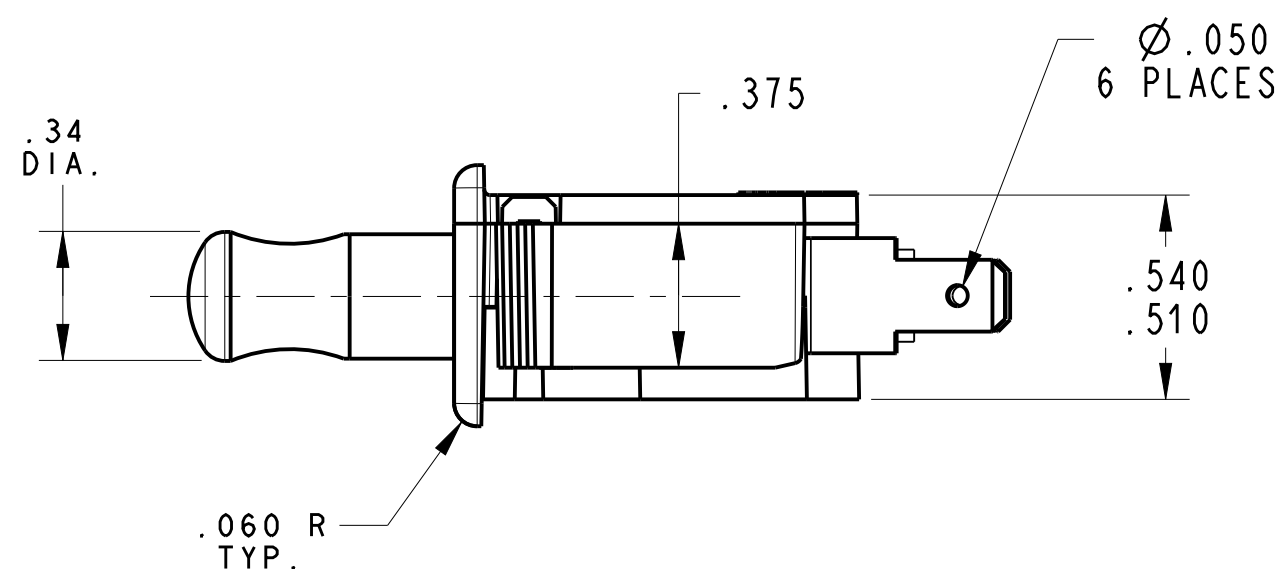

PANEL CUTOUT DETAIL
RECOMMENDED
PANEL THICKNESS
.045-.100

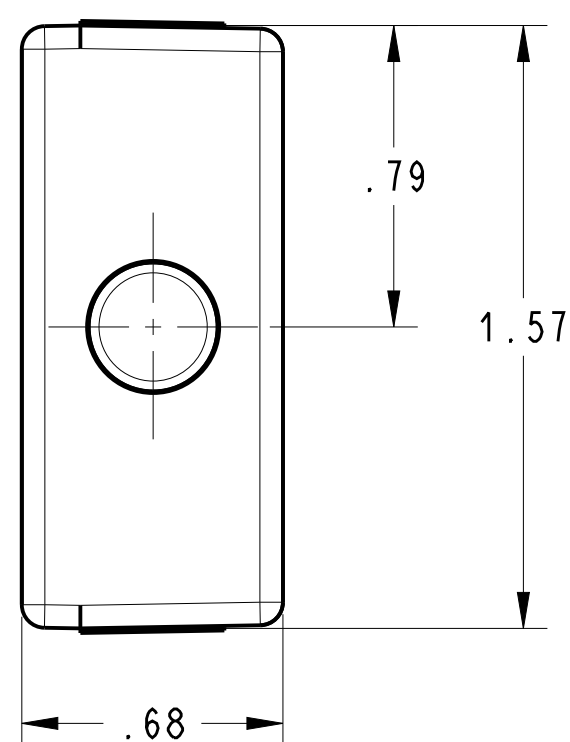

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. SWITCH CHARACTERISTICS:

REST POSITION	.730 TO .790
OPERATION POSITION	.610 TO .710
PRETRAVEL:	.125 MAX.
OVER-TRAVEL:	.100 MIN.
MOVEMENT DIFF	.075 MAX.
OPERATING FORCE grams	757 MAX.
RELEASE FORCE grms	113 MIN.

BUTTON POSITION
AT FULL OVERTRAVEL. .520 MAX.

CHEAT INTERLOCK CHARACTERISTICS:

OPERATING POSITION	.800 TO .900
PRETRAVEL	.155 MAX.
OVERTRAVEL	.030 MIN.
MOVE. DIFF.	.090 MAX.
FULL OVERTRAVEL:	.980 MAX.
OPER. FORCE grams	800 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION
LINE AND MEASURED FROM THE REFERENCE LINE.

2. ELECTRICAL RATING:


0.1A, 125 VAC
0.1A, 30 VDC

3. TERMINALS:


ARE .187 WIDTH x .020 THICKNESS.
QUICK CONNECT.

4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC

5. TEMPERATURE RATING: -40°C TO 85°C

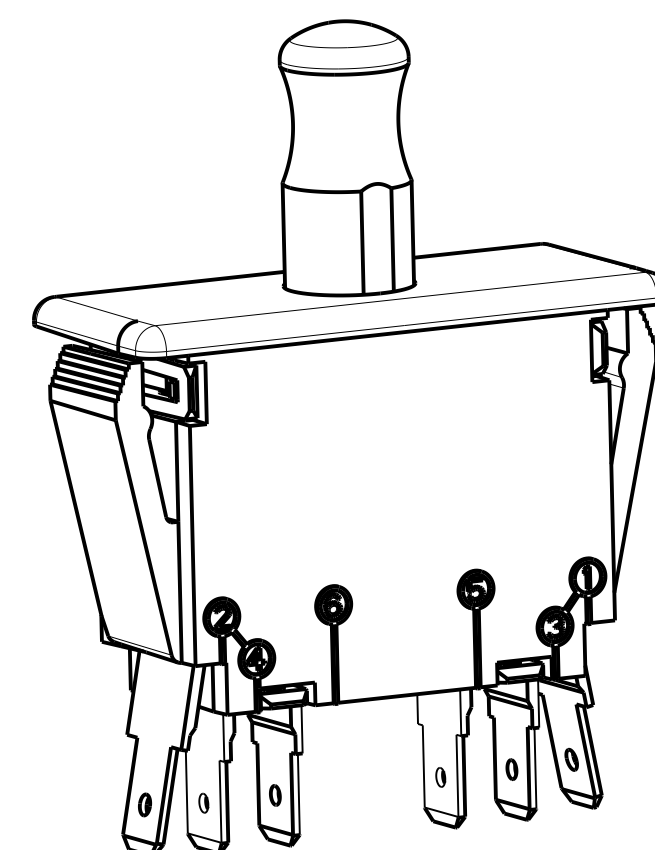

DWN: HV
APVD: RC
DATE: 05-Jul-05
THIRD ANGLE PROJECTION



PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

G	Z000459178	06-Jun-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
N/A	INCHES	± 0.02	± 0.015	$\pm 5.0^\circ$

C	ITEM NO.	0E78-30A0
SCALE:	2:1	SH 1 OF 1

ORIGINAL ON PRO/E