

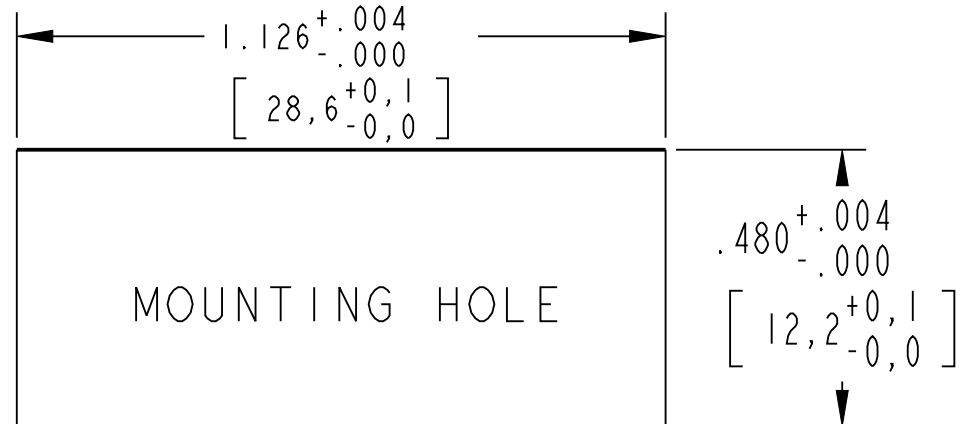
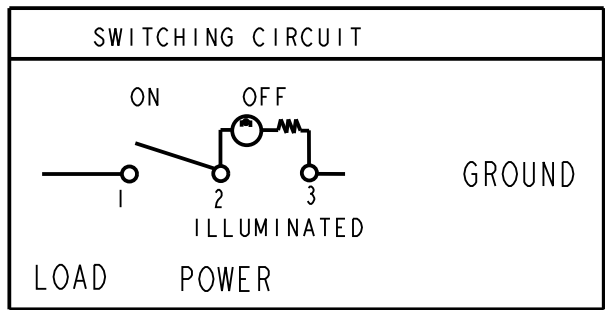
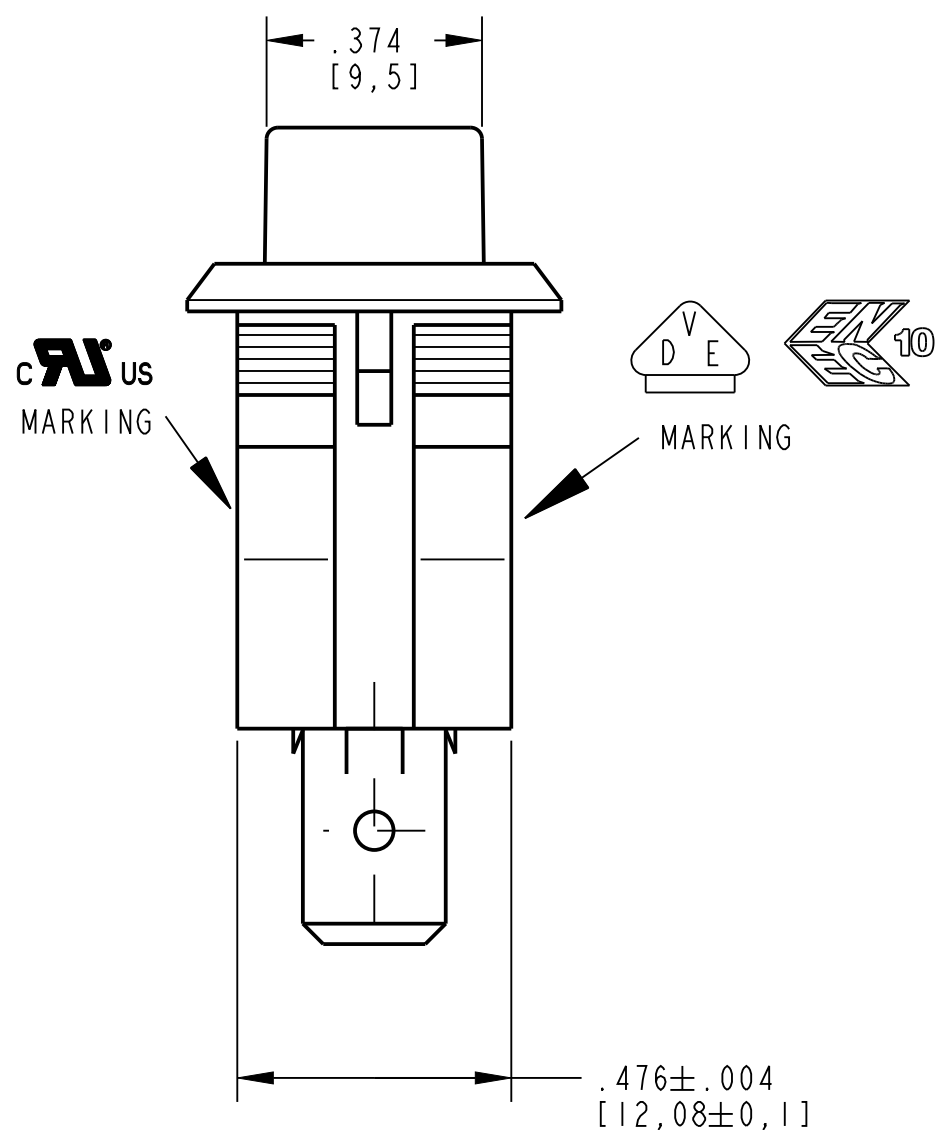


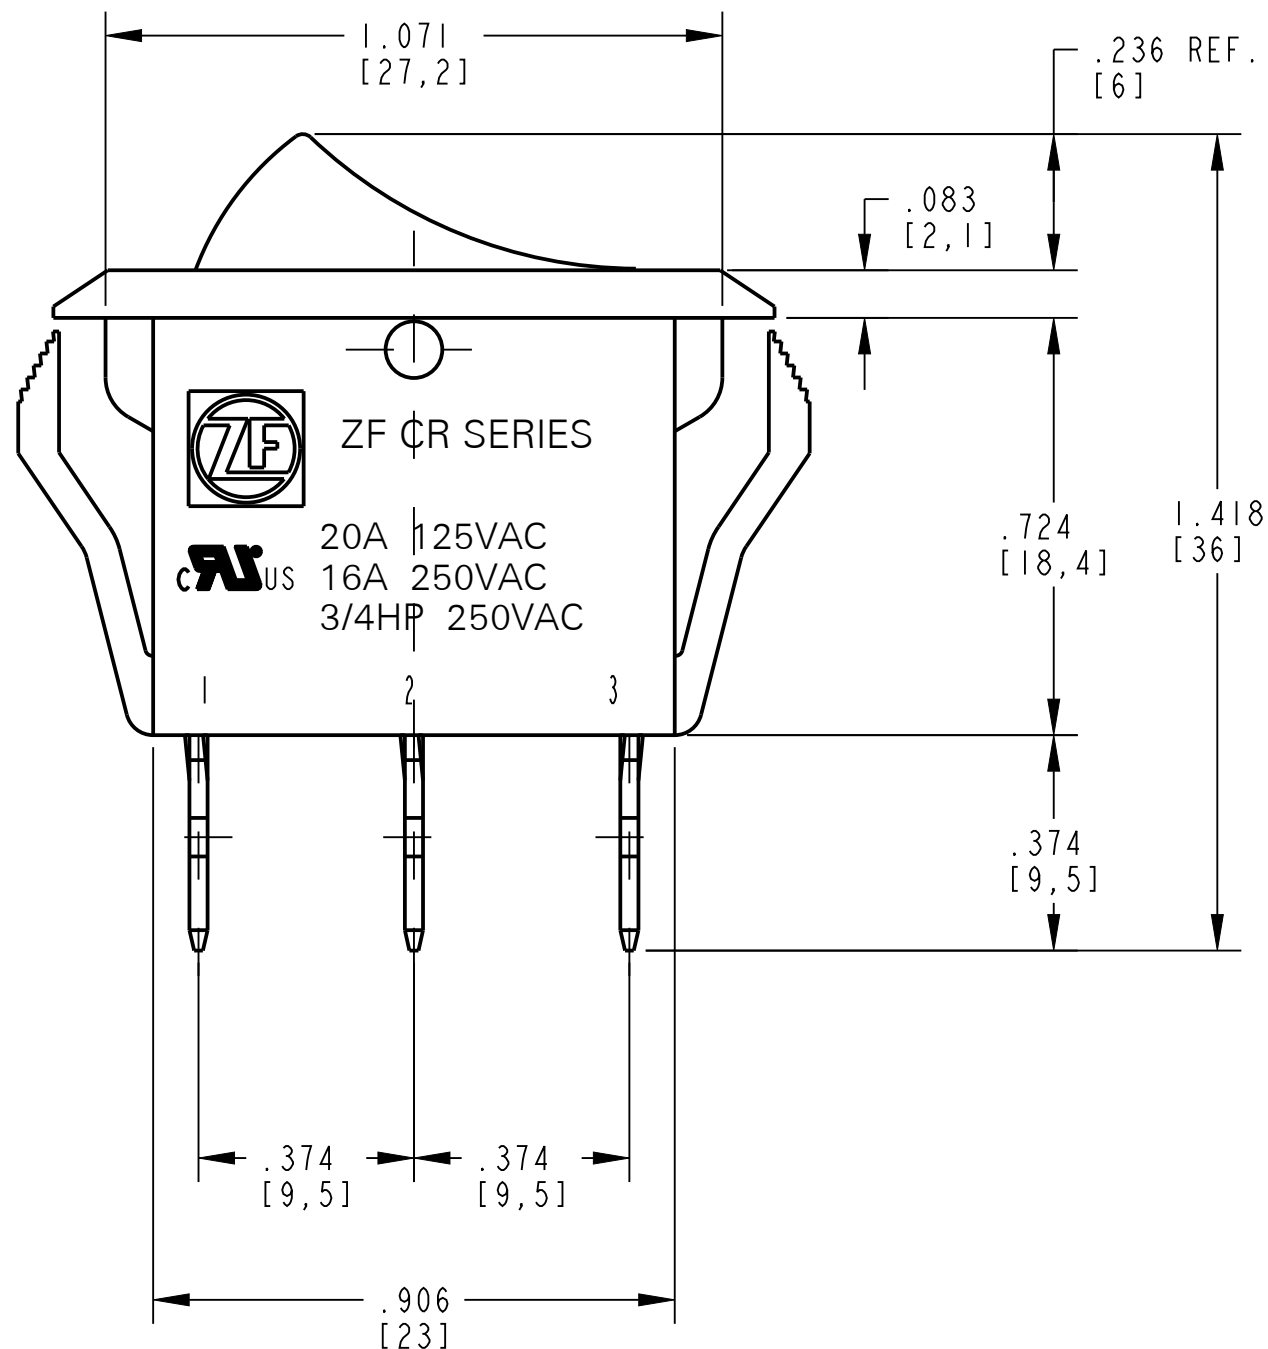


RECOMMENDED PANEL THICKNESS
.030 TO .049
[.75mm TO 1.25mm]

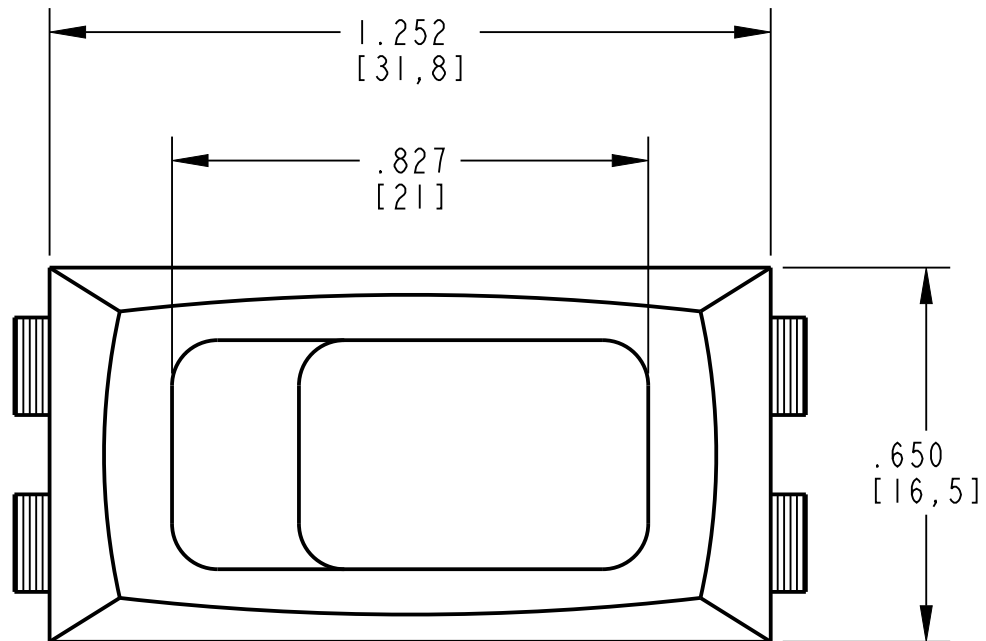

NOTES (UNLESS OTHERWISE SPECIFIED):

- RATING TO BE MARKED ON HOUSING:
20A 125 VAC
16A, 250 VAC
3/4 HP 250 VAC
16(4)A 250V ~ T125/55
- WITHSTAND VOLTAGE: 1000 VAC FOR 1 MINUTE
- INSULATION RESISTANCE: 100MΩ MIN. AT 500 VDC.
- INITIAL CONTACT RESISTANCE: 20mΩ MAX.
- ACTUATOR COLOR: RED
HOUSING COLOR: BLACK
- TERMINALS (3): QUICK CONNECT,
.250 [6.3] WIDE x .031[0.8] THICK, HOLE DIAMETER .067 [1.7].
- NEON BULB ILLUMINATION: 100~125 VAC.
- FOR NAMING AND MARKING SPECIFICATIONS SEE ES021255.
- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWITERS LABORATORIES, INC.

DWN: ELL
APVD: ELL
DATE: 2025-08-14
THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

A	Z000000000	2025-08-14	ELL	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
N/A	INCH	± 0.02	± 0.012	± 5 °

C	ITEM NO.	CRE22F2BBRLE
SCALE:	3:1	SH 1 OF 1