

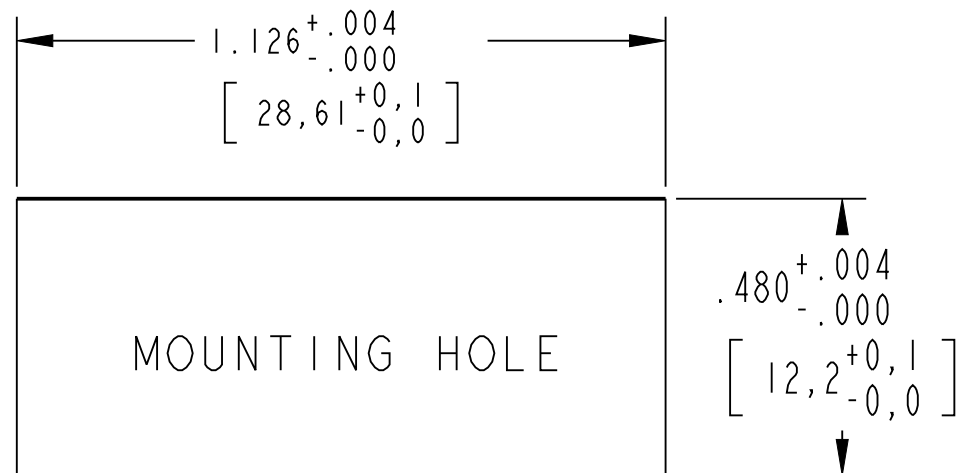
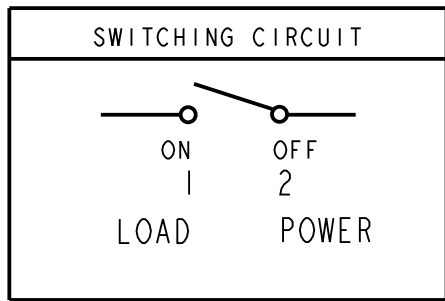
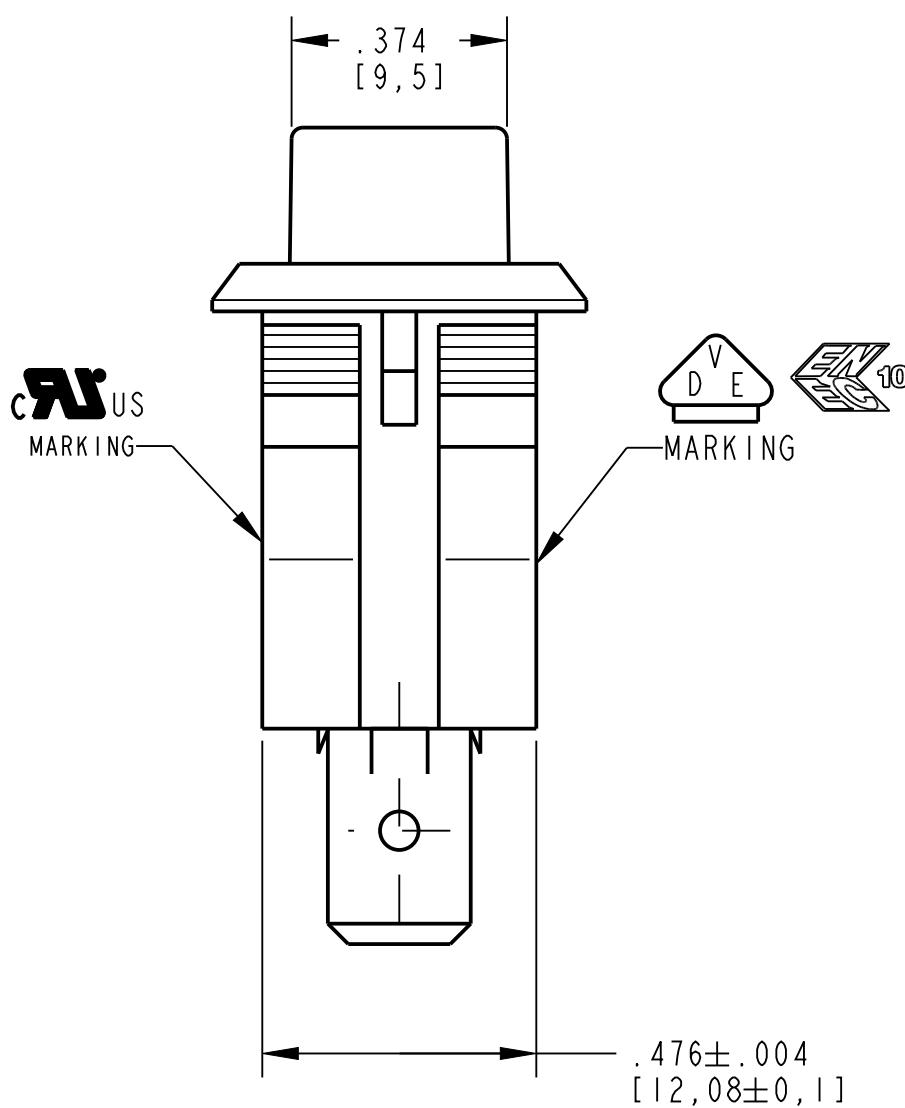


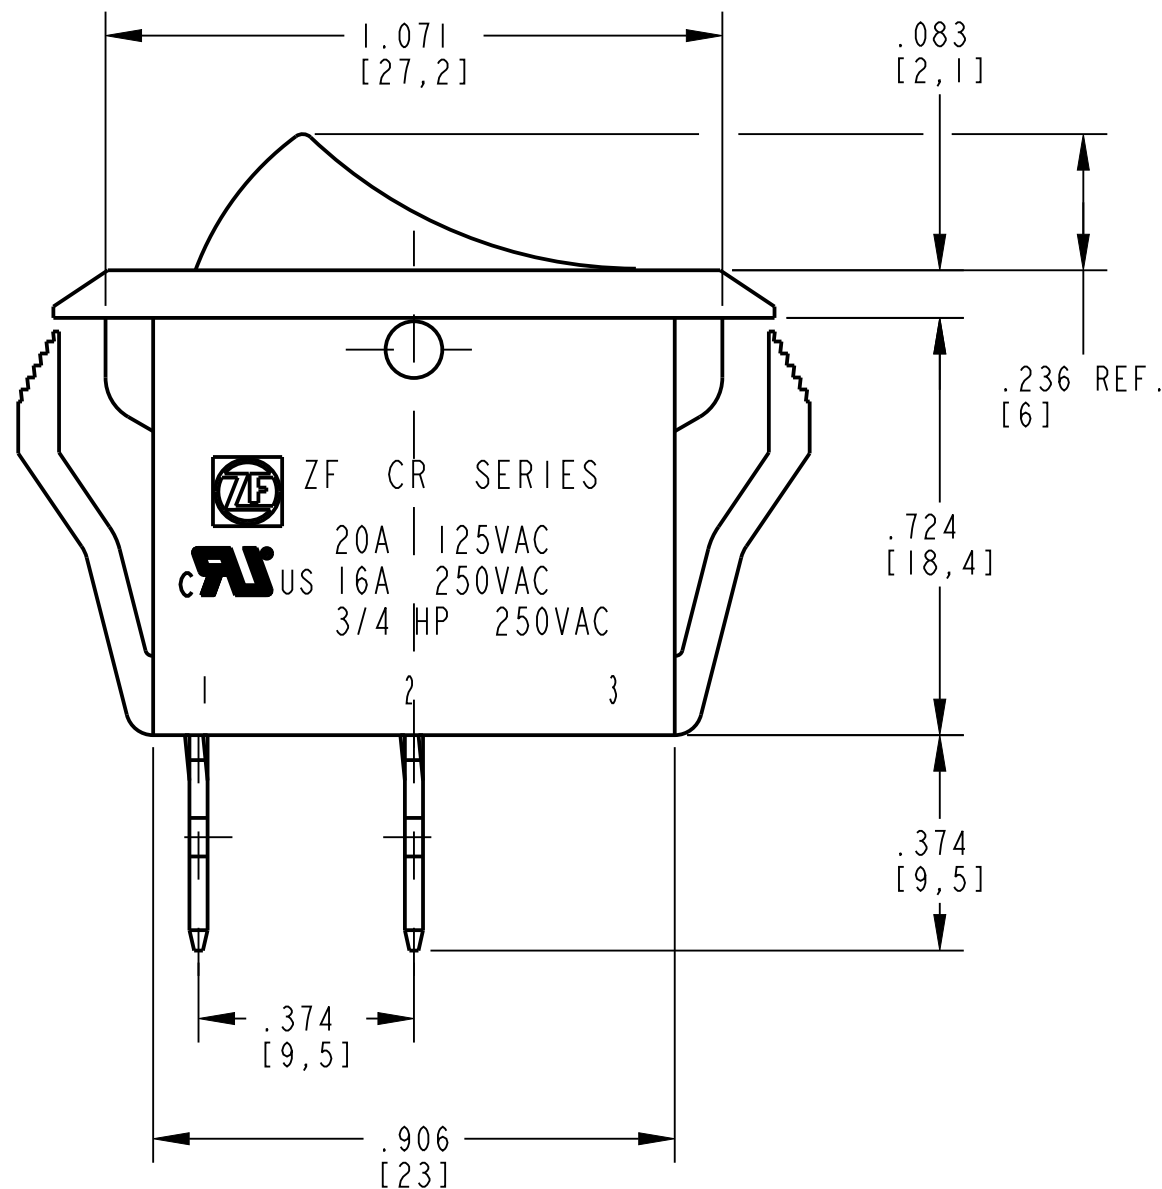


RECOMMENDED PANEL THICKNESS
.030 TO .049
[0.75mm TO 1.25 mm]

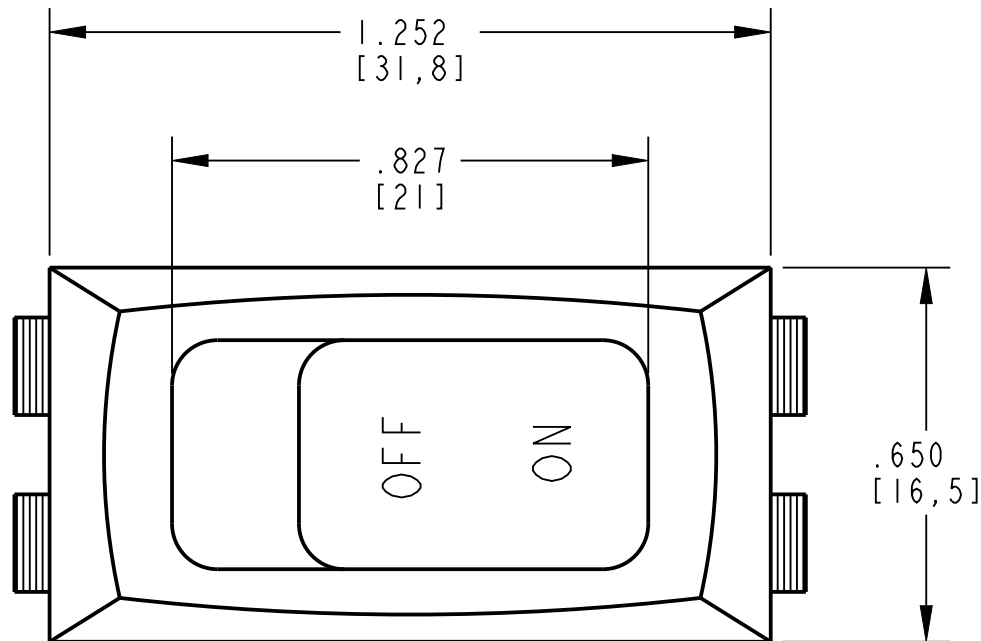

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RATING TO BE MARKED ON HOUSING
 20A 125 VAC
16A, 250 VAC
3/4 HP 250 VAC
  16(4)A 250V~ T125/55
2. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE
3. INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC.
4. INITIAL CONTACT RESISTANCE: 20m Ω MAX.
5. ELECTRICAL LIFE: 10,000 CYCLES
6. ACTUATOR COLOR: BLACK
HOUSING COLOR: BLACK
7. TERMINALS (3): QUICK CONNECT,
.250 WIDE x .031 THICK
HOLE DIAMETER .067.
8. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS
LABORATORIES, INC.
9. FOR NAMING AND MARKINGS SPECIFICATIONS SEE ES021255.

DWN: E. LESLIE		 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION SPEC DRAWING				C		ITEM NO. CRE22F2PBBNE			
APVD: ELL											
DATE: 2025-08-19											
THIRD ANGLE PROJECTION		TOLERANCE UNLESS SPECIFIED DWG UNITSX.XXXANGLES				SCALE: 3:1		SH 1 OF 1			
											
PROJECT/ CSR		INCH				± 0.02		± 0.012		± 5 °	
N/A											
REV		ECO NO.				DATE		PREP		APVD	