

RATING: 20A 125VAC, 10A 250 VAC 

⑤ UL ENDURANCE RATING: 6000 CYCLES

INITIAL CONTACT RESISTANCE: 50m Ω (MAX)





INSULATION RESISTANCE: 500VDC 100 M Ω (MIN)

DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF: IP56 CAPABLE

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC. (AC ONLY)

DATE CODE FORMAT: YYWW

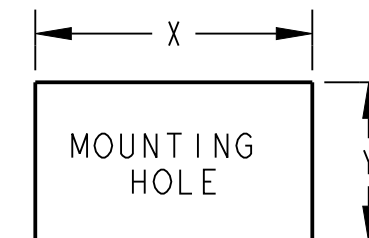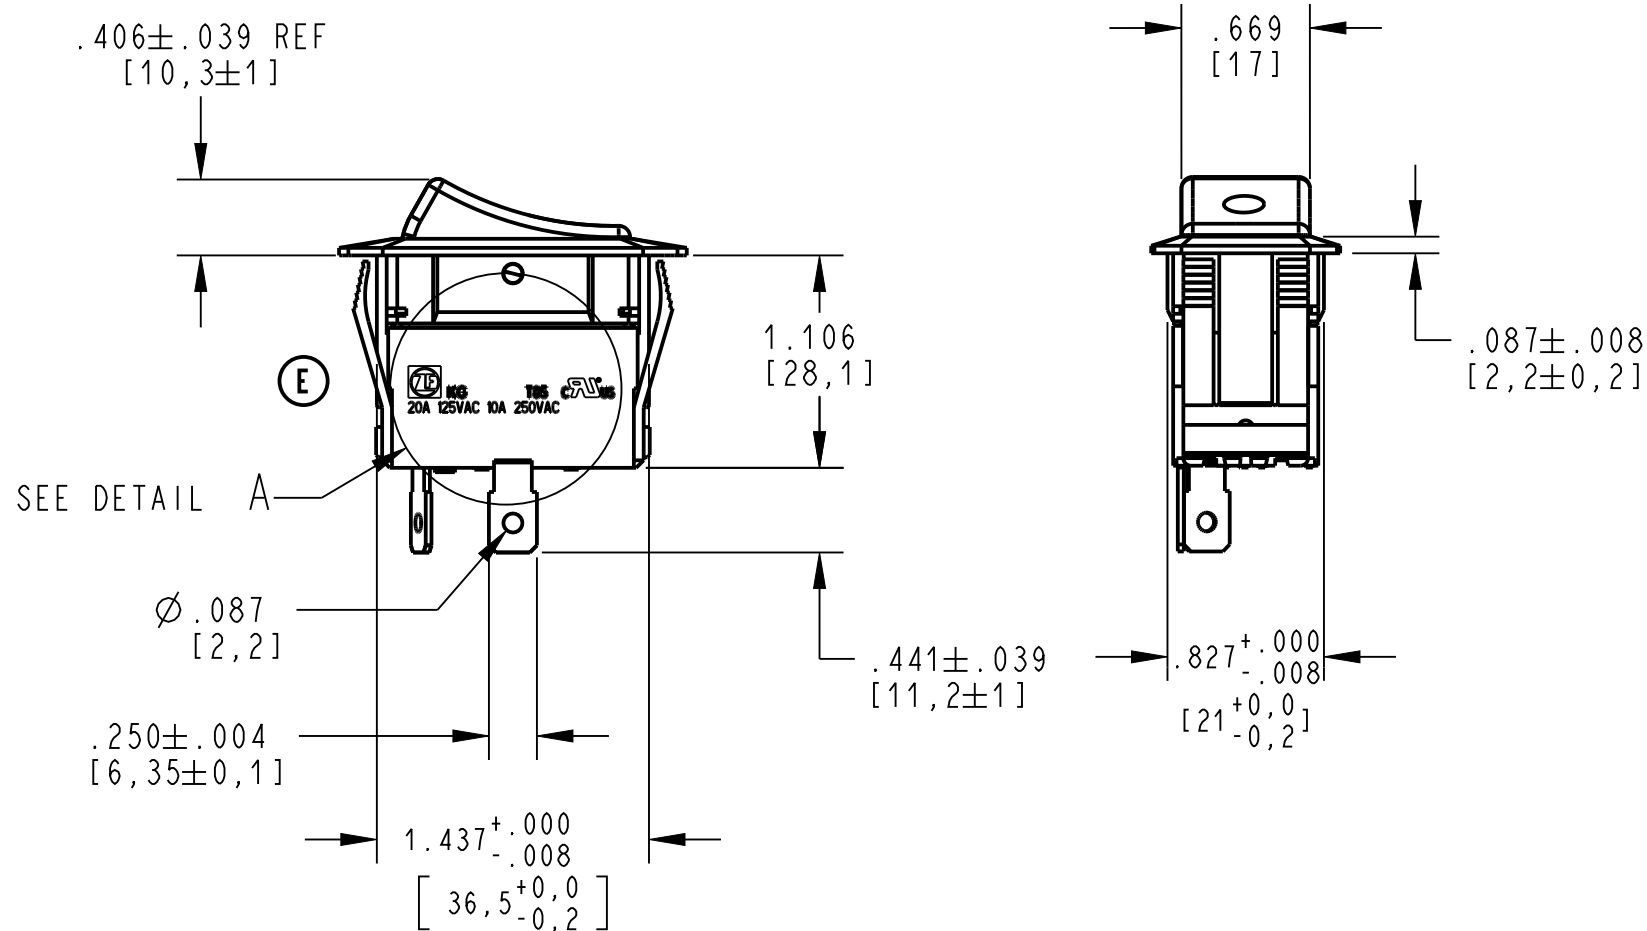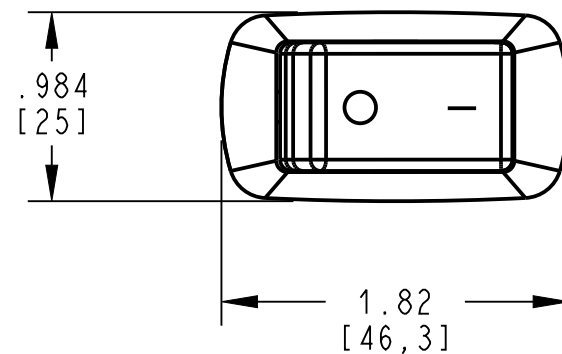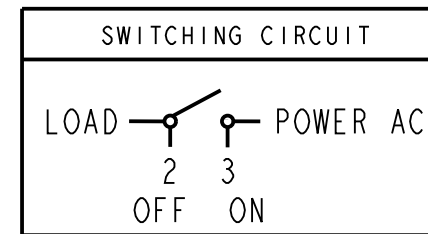

Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0.75 TO 1.25]	1.441.008/-0.000 [36.6+0.2/-0.0]	.835+.004/-0.000 [21.2+0.1/-0.0]
.049 TO .079 [1.25 TO 2.00]	1.449+.008/-0.000 [36.8+0.2/-0.0]	.835+.004/-0.000 [21.2+0.1/-0.0]
.079 TO .118 [2.00 TO 3.00]	1.457+.008/-0.000 [37.0+0.2/-0.0]	.835+.004/-0.000 [21.2+0.1/-0.0]



DETAIL A
SCALE 2:1

DWN: J DOLNIK

APVD: JR

DATE: 4-JUN-08

THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138

E	Z000374406	19-Aug-16	GP	EL
REV	ECO NO.	DATE	PREP	APVD



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME / DESCRIPTION

KG-SPST ON-OFF NON-LIGHTED

B ITEM NO. KGC2ANB1BBD

SCALE: 1:1 SH 1 OF 1

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.012	± 5 °