

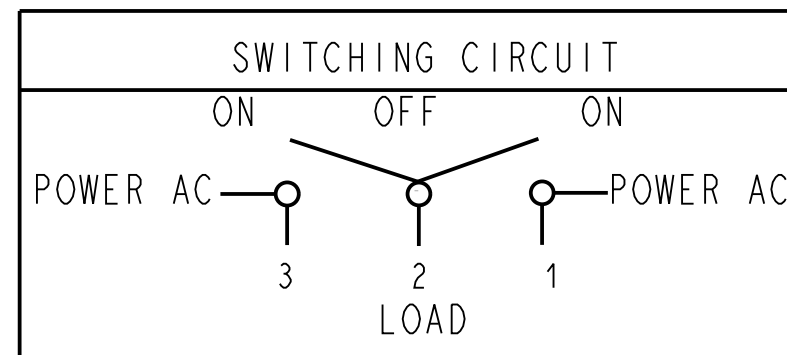
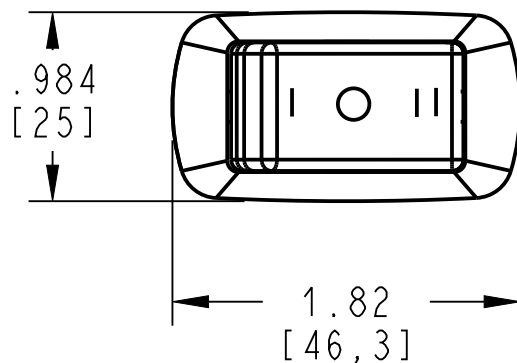


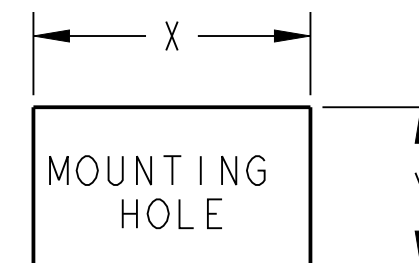

- RATING: 20A 125VAC, 10A 250 VAC 
- (E) UL ENDURANCE RATING: 6000 CYCLES
 - INITIAL CONTACT RESISTANCE: 50m Ω (MAX)
 - (E) INSULATION RESISTANCE: 500VDC 100 M Ω (MIN)
 - DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.
 - WATERPROOF: IP56 CAPABLE
 - RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC. (AC ONLY)

DATE CODE FORMAT: YYWW

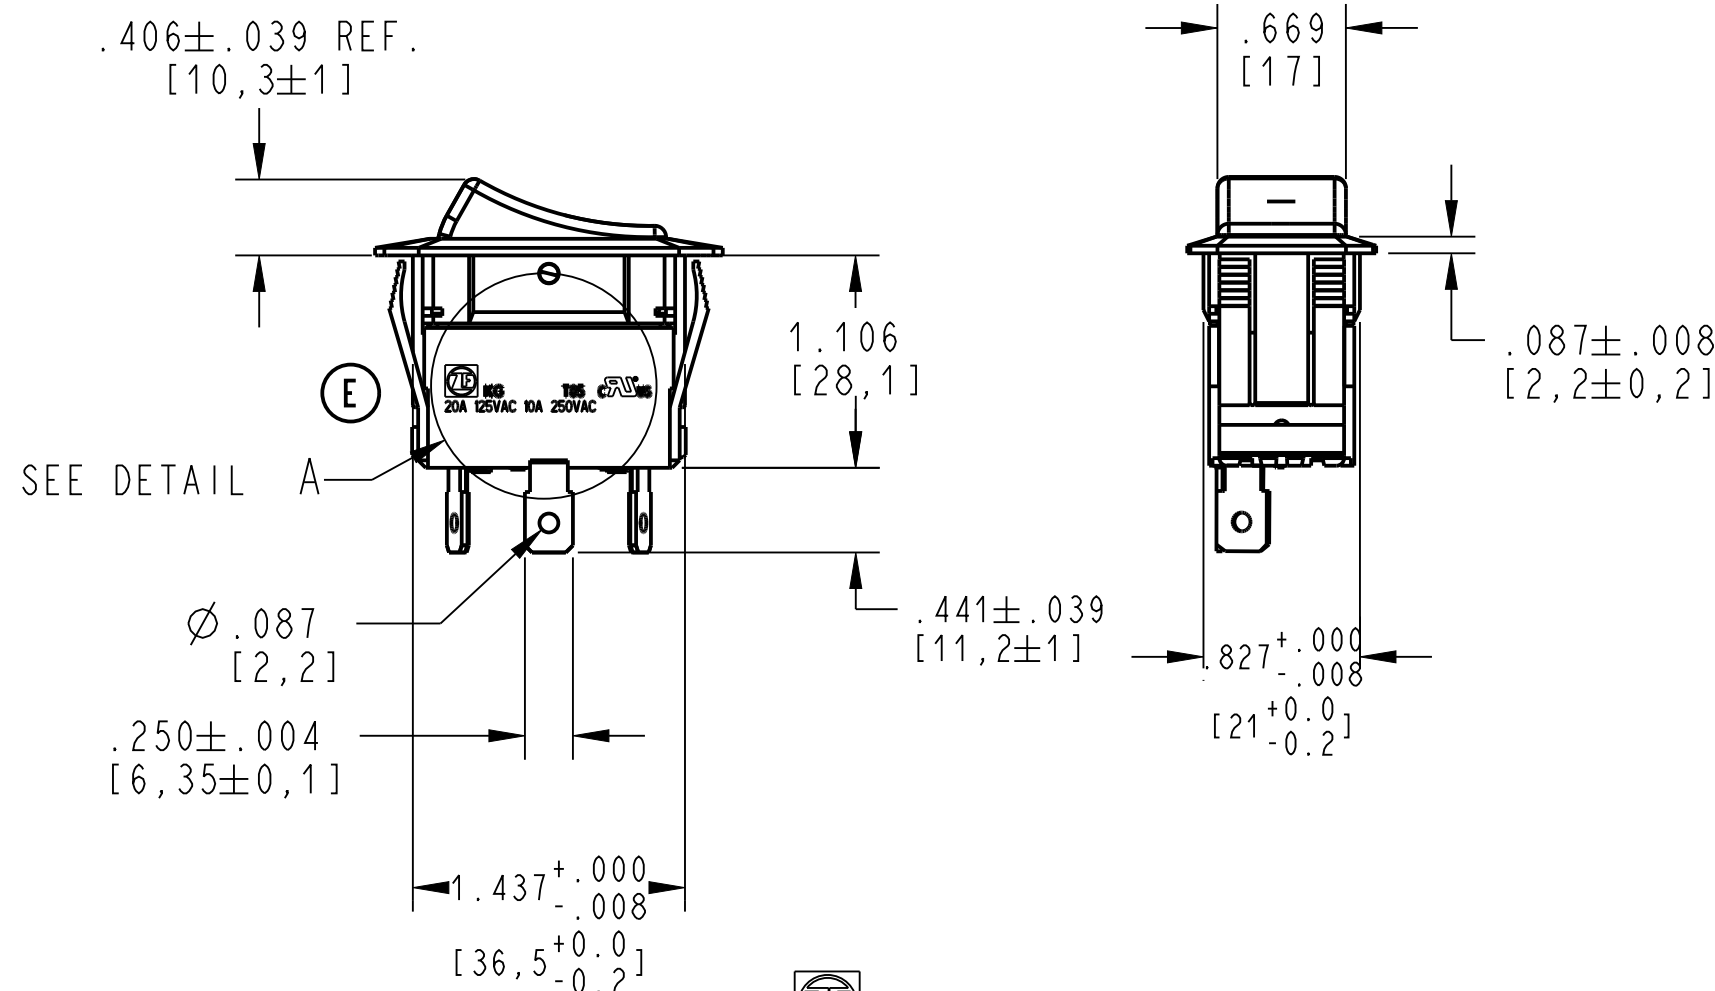

Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0.75 TO 1.25]	1.441±.008/- .000 [36.6+0.2/-0.0]	.835±.004/- .000 [21.2+0.1/-0.0]
.049 TO .079 [1.25 TO 2.00]	1.449±.008/- .000 [36.8+0.2/-0.0]	.835±.004/- .000 [21.2+0.1/-0.0]
.079 TO .118 [2.00 TO 3.00]	1.457±.008/- .000 [37.0+0.2/-0.0]	.835±.004/- .000 [21.2+0.1/-0.0]

(E)  **KG** **T85** 
20A 125VAC 10A 250VAC

DETAIL A
SCALE 2:1

DWN: J DOLNIK
APVD: JR
DATE: 04-Jun-08

THIRD ANGLE PROJECTION



PROJECT/ CSR



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME / DESCRIPTION

KGSPDT ON-OFF NON-LIGHTED

B ITEM NO. **KGC2CNB1BBN**

SCALE: 1:1 SH 1 OF 1

REV	ECO NO.	DATE	PREP	APVD
E	Z000374406	19-Aug-16	GP	EL

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.012	± 5 °

ORIGINAL ON PROJE