

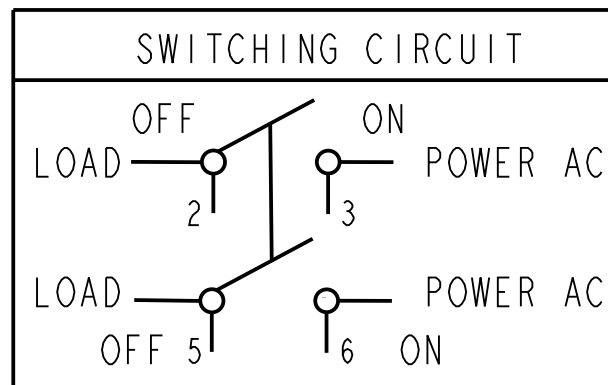
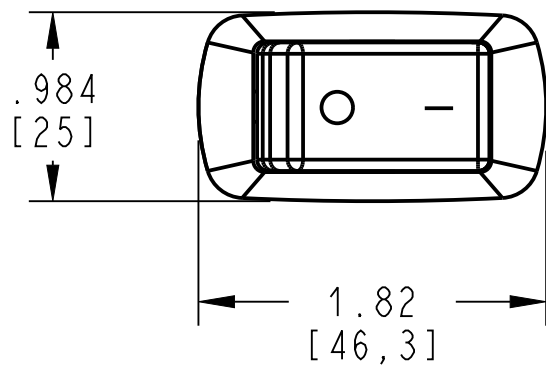


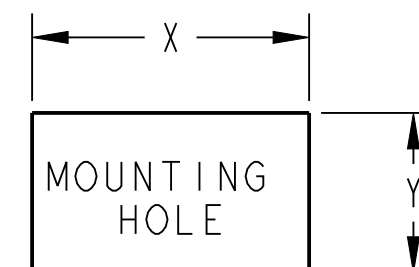

- RATING: 20A 125VAC, 10A 250 VAC
- ⓔ UL ENDURANCE RATING: 6000 CYCLES
- INITIAL CONTACT RESISTANCE: 50m Ω (MAX)
- INSULATION RESISTANCE: 500VDC 100 M Ω (MIN)
- ⓔ DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.
- WATERPROOF: IP56 CAPABLE

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC. (AC ONLY)

DATE CODE FORMAT: YYWW

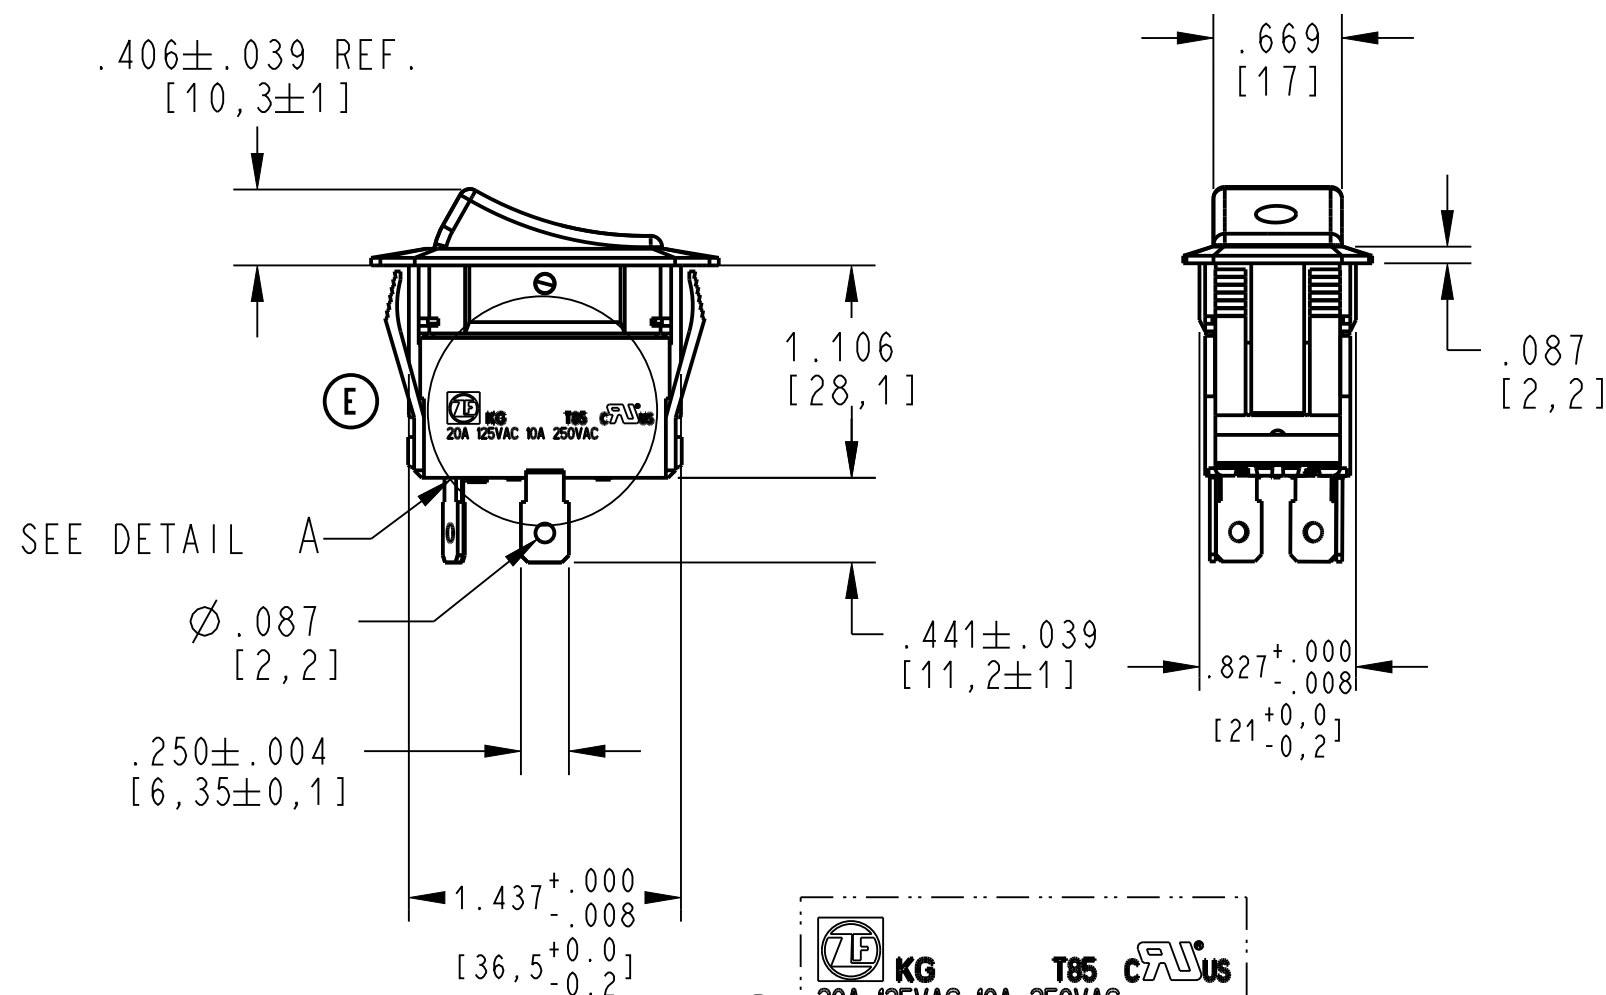

Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0.75 TO 1.25]	1.441+.008/- .000 [36.6+0.2/-0.0]	.835+.004/- .000 [21.2+0.1/-0.0]
.049 TO .079 [1.25 TO 2.00]	1.449+.008/- .000 [36.8+0.2/-0.0]	.835+.004/- .000 [21.2+0.1/-0.0]
.079 TO .118 [2.00 TO 3.00]	1.457+.008/- .000 [37.0+0.2/-0.0]	.835+.004/- .000 [21.2+0.1/-0.0]



DETAIL A
SCALE 2:1

DWN: J DOLNIK				ZF Electronic Systems	
APVD: JR					
DATE: 04-JUN-08		PLEASANT PRAIRIE, WISCONSIN U.S.A.		NAME / DESCRIPTION	
THIRD ANGLE PROJECTION				KG-DPST ON-OFF NON-LIGHTED	
PROJECT/ CSR		TOLERANCE UNLESS SPECIFIED		B ITEM NO. KGC3ANB1BBD	
4000000138		DWG UNITS	X.XX	X.XXX	ANGLES
REV		ECO NO.	DATE	PREP	APVD
INCH		± 0.02	± 0.012	± 5 °	
SCALE: 1:1		SH 1 OF 1			

E	Z000374406	19-Aug-16	GP	EL
REV	ECO NO.	DATE	PREP	APVD