

NOTES: (UNLESS OTHERWISE SPECIFIED)

RATING: TO BE MARKED ON HOUSING

20A, 125VAC, 1/3 HP 

10A, 250VAC, 3/4 HP 

10(4)A 250VAC, μ T85 10E3  (G)

21A 14VDC (NOT AGENCY APPROVED)

INITIAL CONTACT RESISTANCE: 50m Ω (MAX)

INSULATION RESISTANCE: 500VDC 100M Ω (MIN)


DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF: IP56 CAPABLE

DATE CODE FORMAT: YYWW

TERMINALS: $.250 \pm .004$ [6.35 \pm 0.1mm] X $.031 \pm .002$ [.8 \pm .03mm]. HOLE DIAMETER .090 [2.3]

TEMPERATURE: -20°C TO 85°C

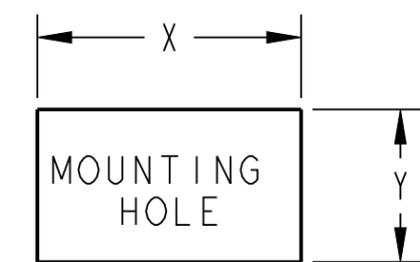

DIM. Z	DIM. X	DIM. Y
.03in TO .20in 0.75mm TO 5mm	1.45+.008/- .000in 36.8+0.2/-0.0mm	.6+.004/- .000in 15.2+0.1/-0.0mm

DWN: J. DOLNIK

APVD: ELL

DATE: 2025-01-22

THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KT ON-OFF-ON NON LIGHTED

B ITEM NO. KTG2CNB1BBNNNN

SCALE: 1:1 SH 1 OF 1

REV	ECO NO.	DATE	PREP	APVD
G	Z000766945	2025-01-22	ELL	ELL

PROJECT/ CSR
4000000138

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES (mm)	\pm 0.02	\pm 0.012	\pm 5 °

ORIGINAL ON PROJE