
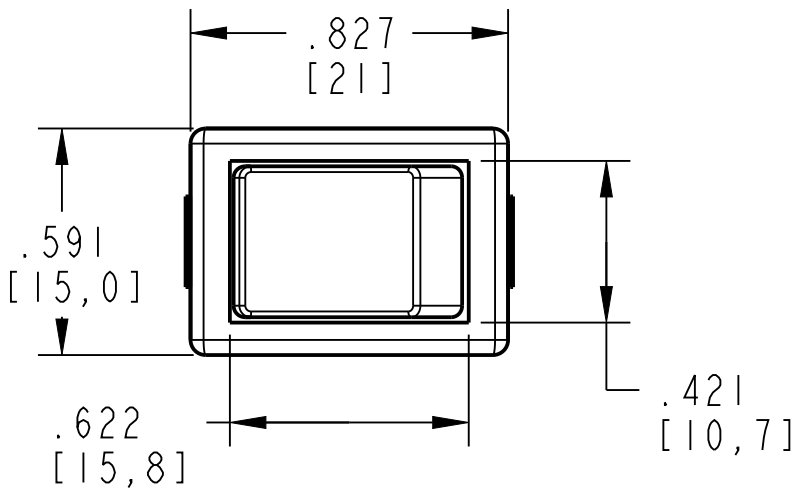


SWITCHING CIRCUIT

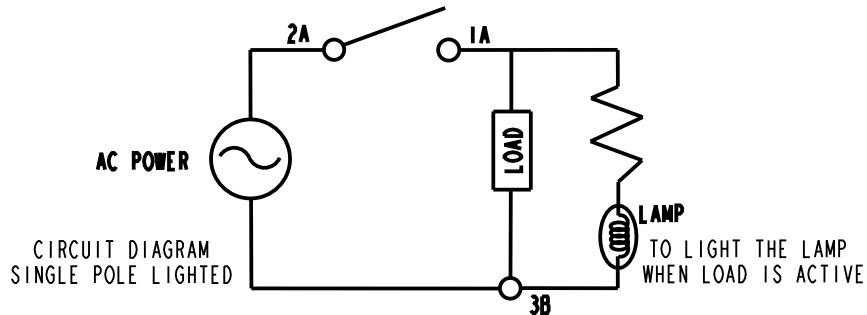

NOTES (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON HOUSING:

10A 125 VAC
8A 250 VAC
1/4 HP 125/250 VAC

10(4)A 250V-TI25/55

12(4)A 125/250V~

DIELECTRIC WITHSTAND VOLTAGE: 1500 VAC FOR 1 MINUTE





INSULATION RESISTANCE: 100MΩ MIN. AT 500 VDC

INITIAL CONTACT RESISTANCE: 20mΩ MAX.

ELECTRICAL LIFE: 10,000 CYCLES

ACTUATOR COLOR: GREEN


ILLUMINATION: 100-125VAC

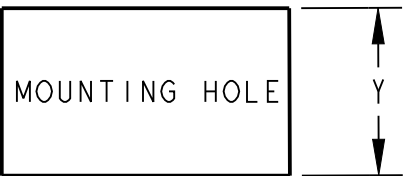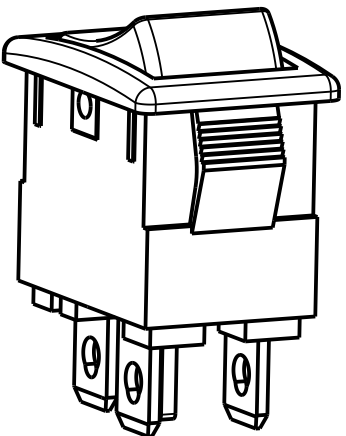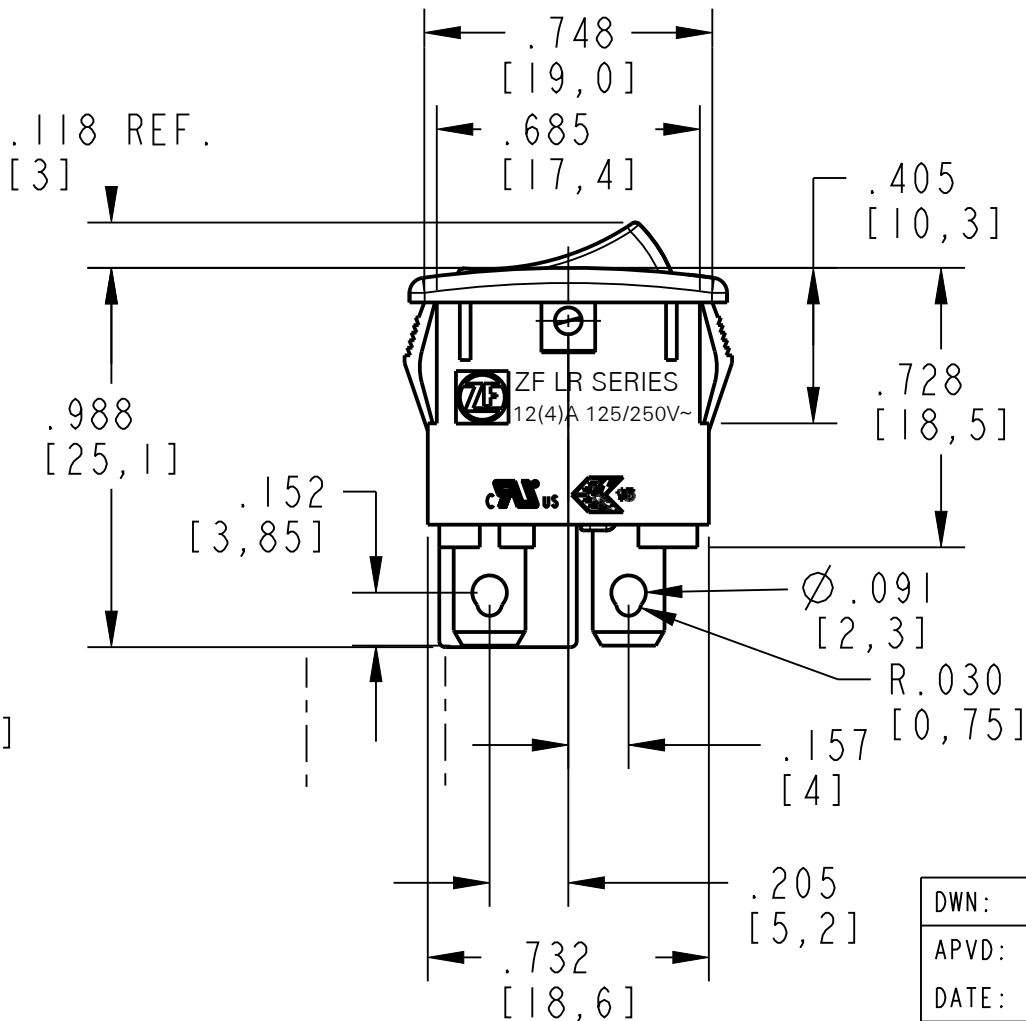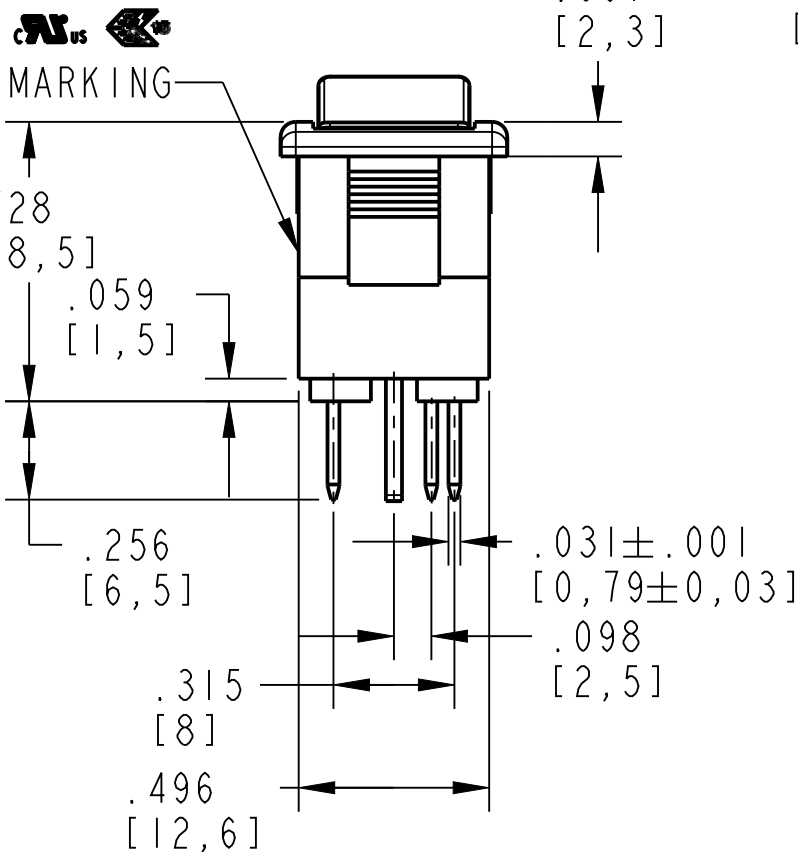

Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0,75 TO 1,25]	.756+.004/- .000 [19,2 +0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]
.049 TO .079 [1,25 TO 2,0]	.764+.004/- .000 [19,4 +0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]
.079 TO .118 [2,0 TO 3,0]	.780+.004/- .000 [19,8 +0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]

DWN: ELL
APVD: ELL
DATE: 13-AUG-25
THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

A	Z000000000	2025-08-13	ELL	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. LRA22H2BBGLN

SCALE: 2.000 SH 1 OF 1