

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ELECTRICAL CHARACTERISTICS:

RATING TO BE MARKED ON HOUSING:

**us**

10A 125 VAC

**us**

8A 250 VAC

**us**

1/4 HP 125/250 VAC

**us**



10(4)A 250V~T125/55

**us**

12(4)A 125/250V~


DIELECTRIC WITHSTAND VOLTAGE: 1500 VAC FOR 1 MINUTE
INSULATION RESISTANCE: 100MΩ MIN. AT 500 VDC
INITIAL CONTACT RESISTANCE: 20mΩ MAX.
ELECTRICAL LIFE: 10,000 CYCLES

2. TERMINAL (2): SOLDER TAG .185+.004/- .002 [4,7+0,1/-0,05] WIDE
X .031±.001 [0,8±0,03] THK.
HOLE DIAMETER .091 [2,3].

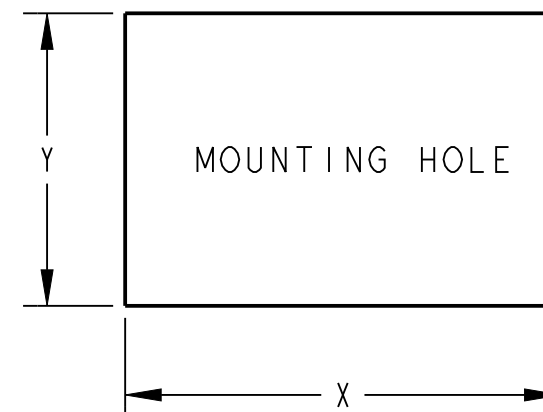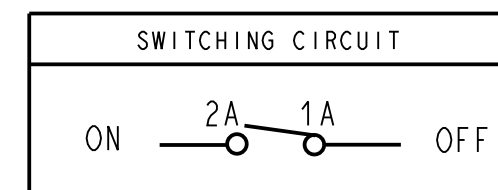

PANEL THICKNESS	DIM. X	DIM. Y
.030 TO .049 (0.75 TO 1.25)	.756 ^{+.004} _{-.000} (19.2 ^{+0.1} ₋₀)	.508 ^{+.006} _{-.000} (12.9 ^{+0.15} ₋₀)
.049 TO .079 (1.25 TO 2)	.764 ^{+.004} _{-.000} (19.4 ^{+0.1} ₋₀)	
.079 TO .118 (2 TO 3)	.780 ^{+.004} _{-.000} (19.8 ^{+0.1} ₋₀)	

DWN: JPD
APVD: ELL
DATE: 18-Apr-18
THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. LRA22H2FBBNN

SCALE: 3:1 SH 1 OF 1

B	Z000686755	2023-04-25	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °