
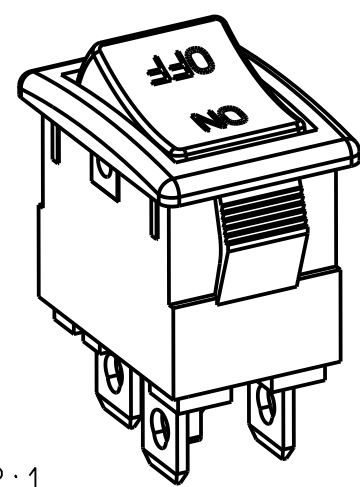


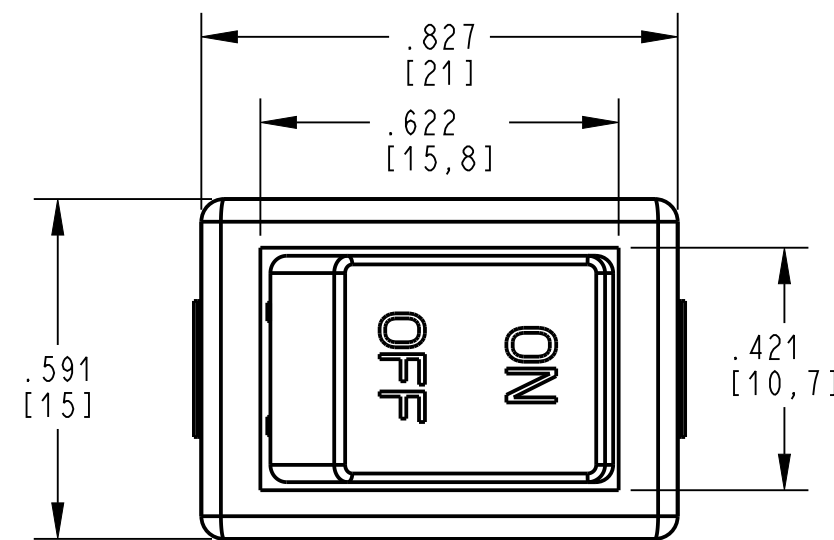

SCALE 2:1

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ELECTRICAL CHARACTERISTICS:

RATING TO BE MARKED ON HOUSING:

10A 125VAC
8A 250 VAC
1/4 HP 125/250VAC

CE 15 10(4)A 250V~ T125/55



us 15 12(4)A 125/250V~

2. DIELECTRIC WITHSTAND VOLTAGE: 1500 VAC FOR 1 MINUTE
INSULATION RESISTANCE: 100MΩ MIN. AT 500 VDC
INITIAL CONTACT RESISTANCE: 20mΩ MAX.
ELECTRICAL LIFE: 10,000 CYCLES



3. MECHANICAL CHARACTERISTICS:

COLORS: HOUSING - BLACK
ACTUATOR: RED
TERMINAL (4): SOLDER TAG .185+.004/- .002
[4.7+0,1/-0,05 WIDE X .031 ±.001 [0,8±0,03] THK

4. ILLUMINATION: 100-125VAC

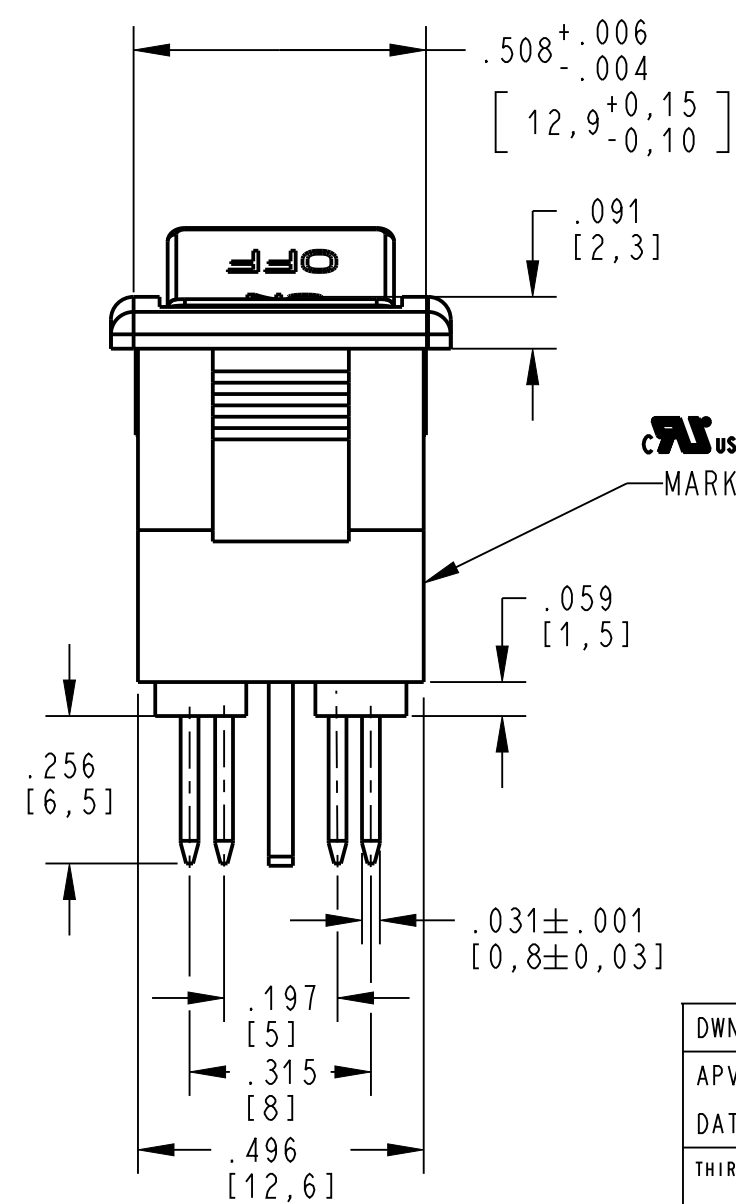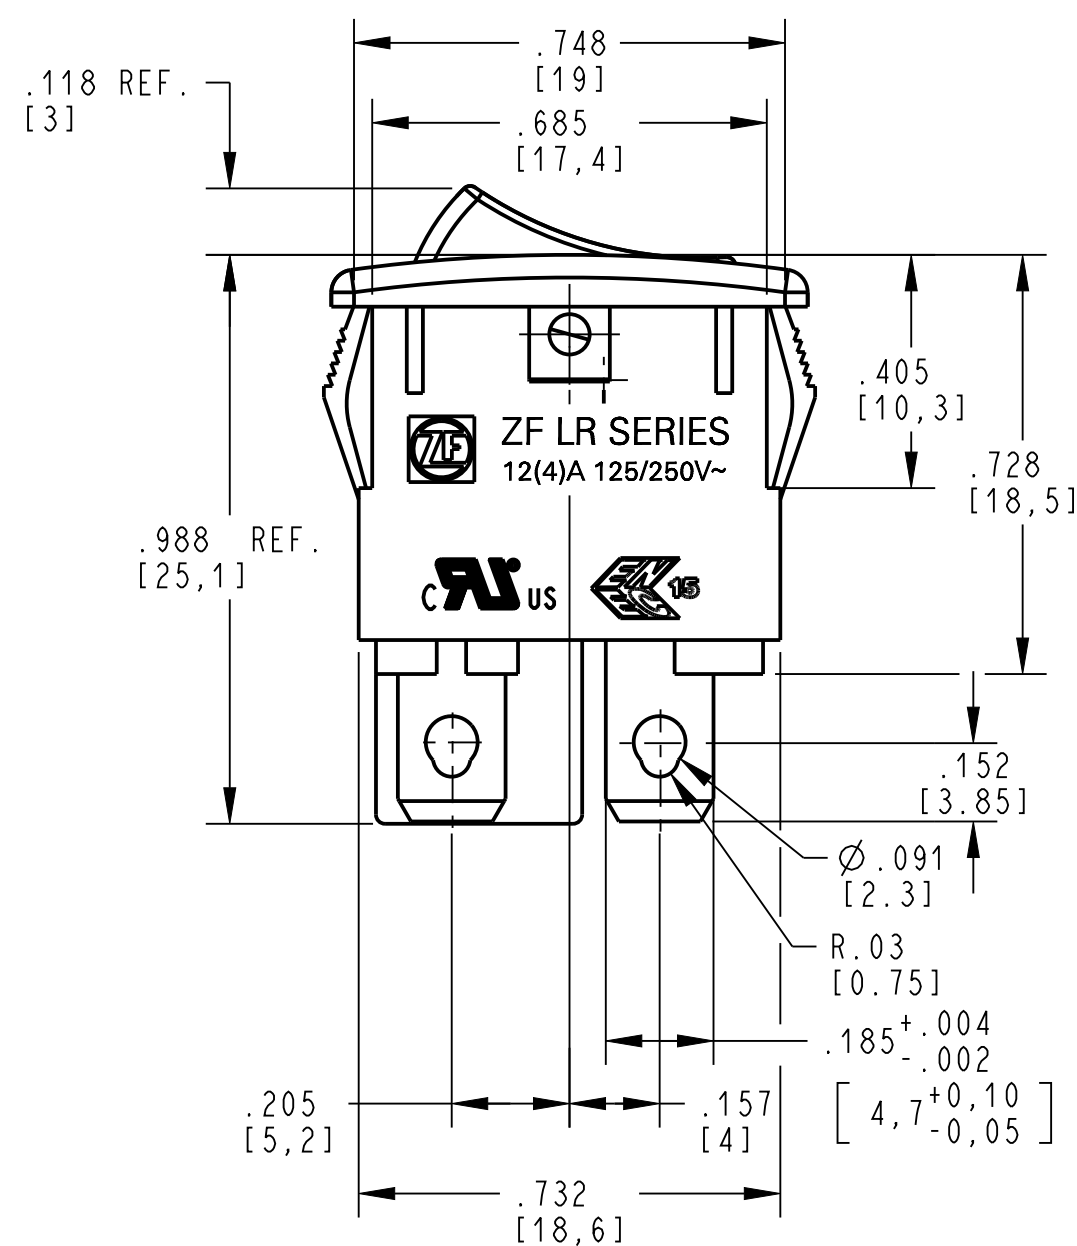

MARKING

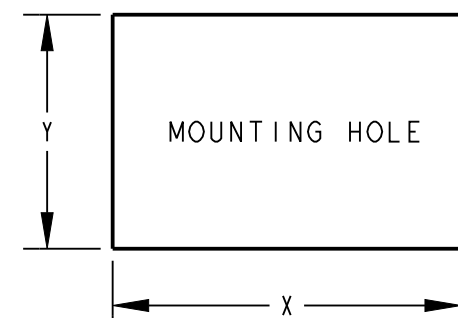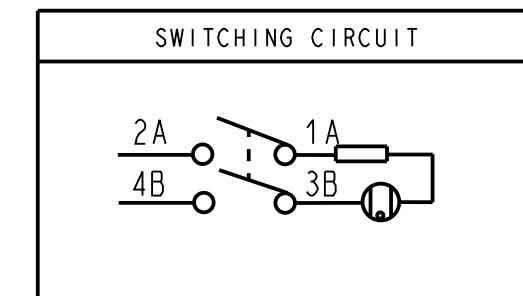

PANEL THICKNESS	DIM. X	DIM. Y
.030 TO .049 [0,75~1,25]	.756+.004/- .000 [19,2+0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]
.049 TO .079 [1,25~2,0]	.764+.004/- .000 [19,4+0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]
.079 TO .118 [2,0~3,0]	.780+.004/- .000 [19,8+0,1/0,0]	.508+.006/- .000 [12,9+0,15/-0,0]

H	Z000686755	2023-04-25	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD

DWN: TLM
APVD: CY
DATE: 18-Sep-09
THIRD ANGLE PROJECTION
PROJECT/ CSR
N/A

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °

 ZF Electronic Systems	
PLEASANT PRAIRIE, WISCONSIN U.S.A.	
NAME / DESCRIPTION	
SPECIFICATION DRAWING	
B	ITEM NO. LRA32H2BBRLN
SCALE:	3:1 SH 1 OF 1