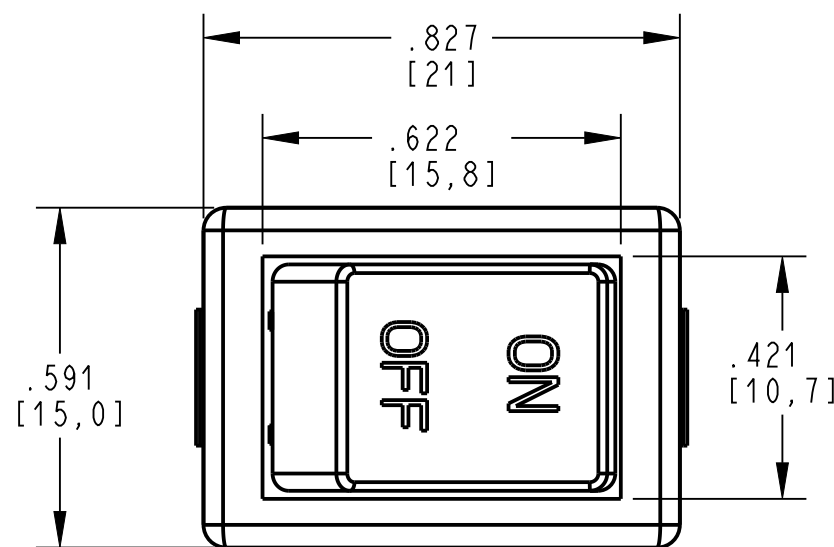


SCALE 1:1

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ELECTRICAL CHARACTERISTICS:

RATING TO BE MARKED ON HOUSING:




10A 125VAC
8A 250 VAC
1/4 HP 125/250VAC

(B) 10(4)A 250V~ T125/55
12(4)A 125/250V~



DIELECTRIC WITHSTAND VOLTAGE: 1500 VAC FOR 1 MINUTE
INSULATION RESISTANCE: 100MΩ MIN. AT 500 VDC
INITIAL CONTACT RESISTANCE: 20mΩ MAX.
ELECTRICAL LIFE: 10,000 CYCLES

2. COLORS: HOUSING - BLACK
ACTUATOR: BLACK.

3. TERMINAL (4): SOLDER TAG .185+.004/- .002[4,7+0,1/-0,05] WIDE
X .031±0,001[0,8±0,03] THK.

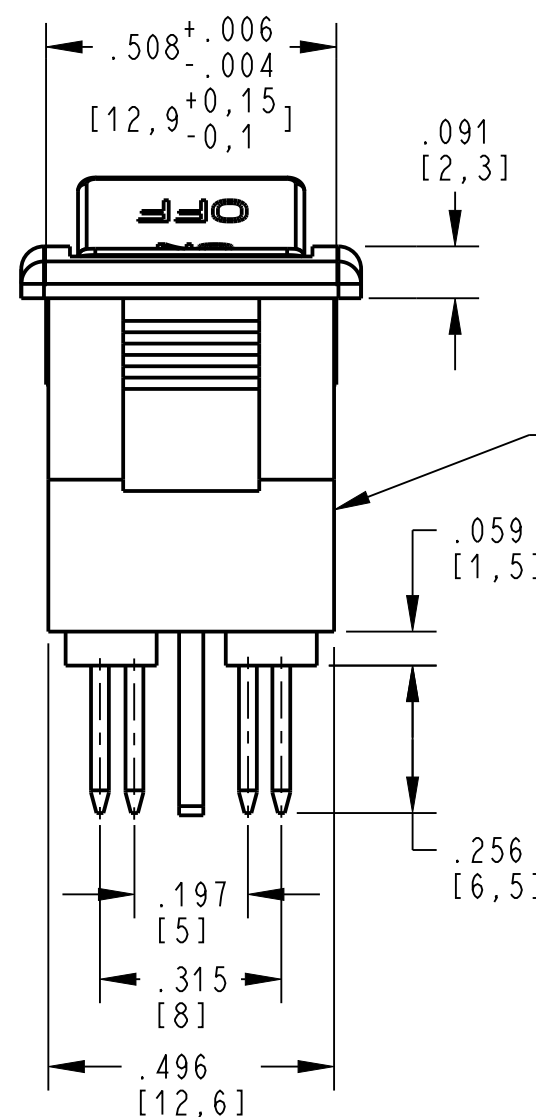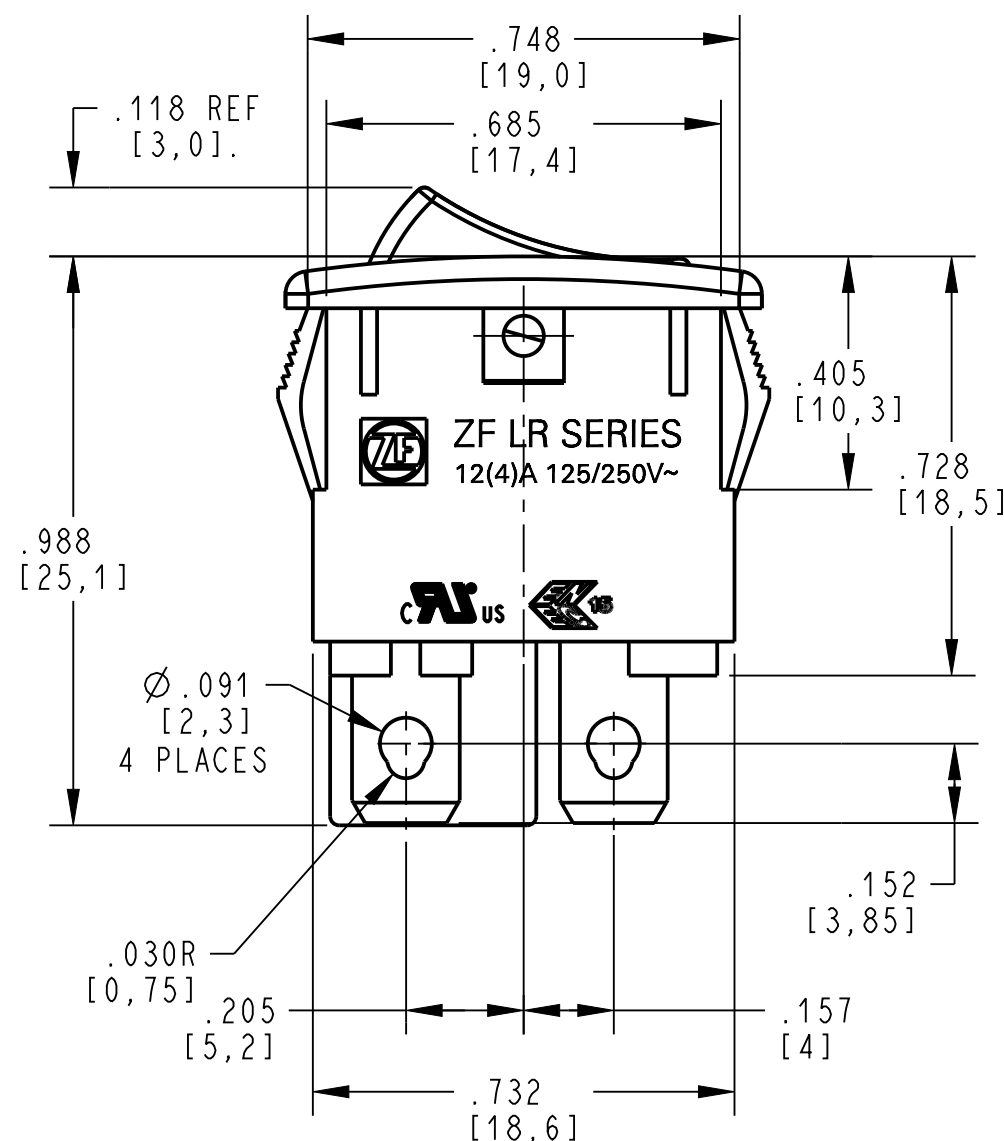


MARKING

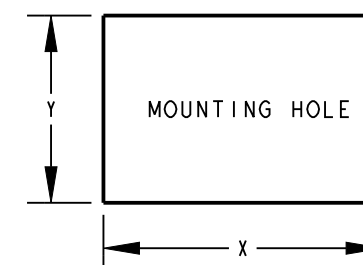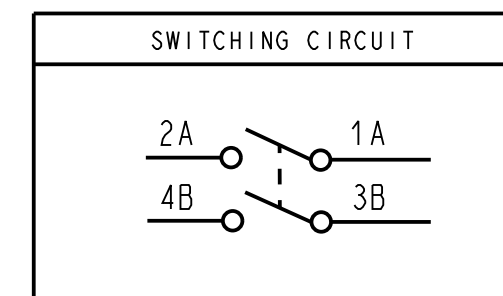

PANEL THICKNESS	DIM. X	DIM. Y
.030 TO .049 [0,75~1,25]	.756+.004/- .000 [19,2+0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]
.049 TO .079 [1,25~2,0]	.764+.004/- .000 [19,4+0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]
.079 TO .118 [2,0~3,0]	.780+.004/- .000 [19,8+0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]

DWN: JPD
APVD: ELL
DATE: 11-Dec-17

THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

REV	ECO NO.	DATE	PREP	APVD
B	Z000686755	2023-04-25	TCH	ELL

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. LRA32H2DBBNN
SCALE: 3:1 SH 1 OF 1