
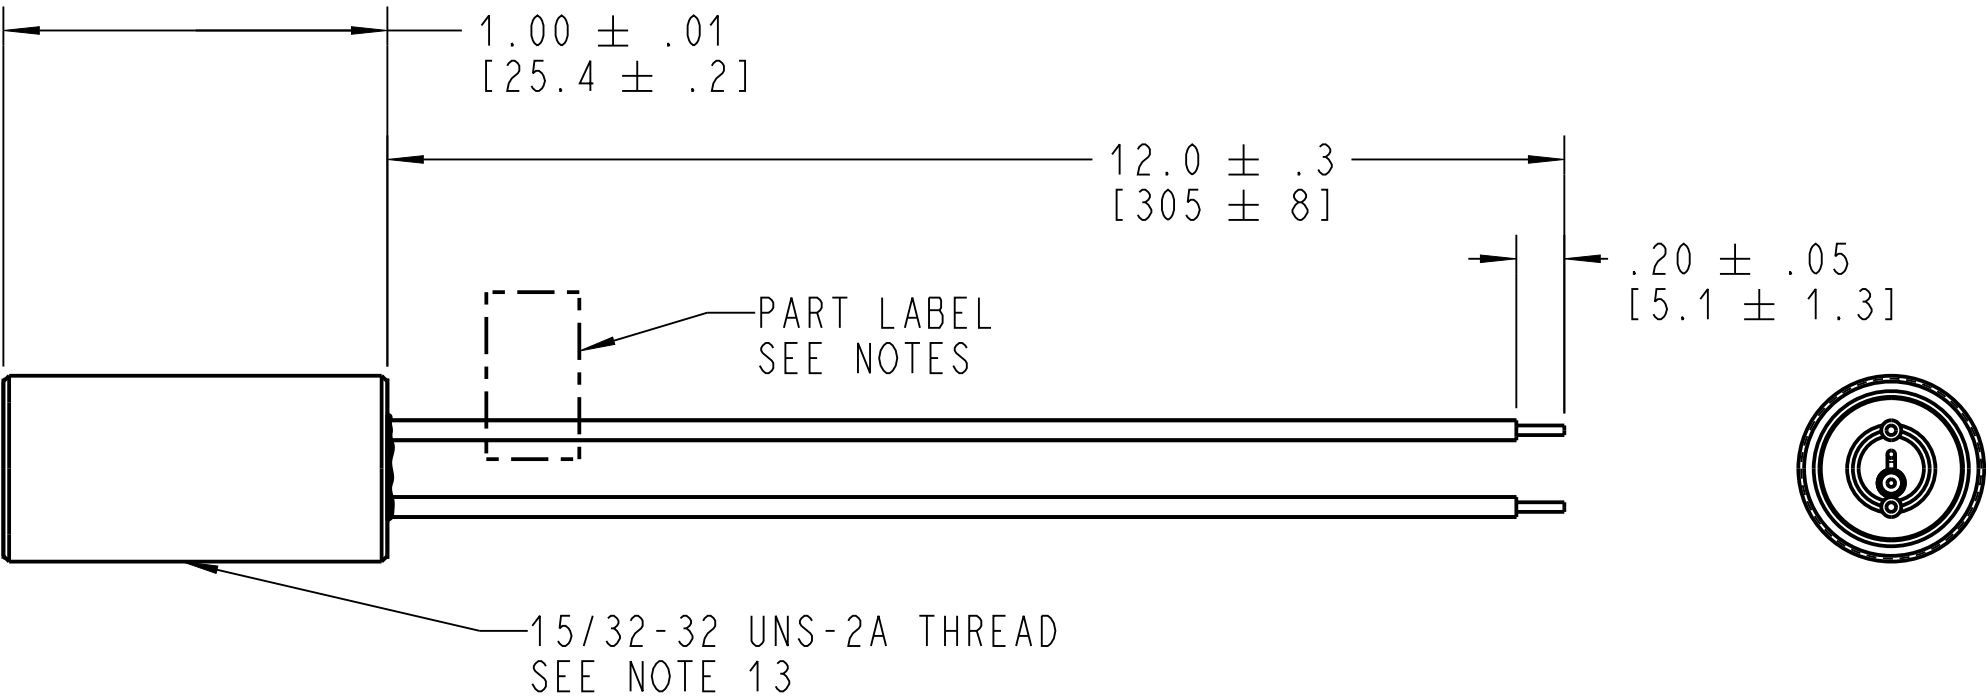


- NOTES:
- 1. ALL SENSORS ARE 100% FUNCTIONAL TESTED.
 - 2. PRODUCT IS ROHS COMPLIANT.
 - 3. OPERATING TEMPERATURE RANGE: -40°C TO 105°C
 - 4. LABEL TO INCLUDE:
 - MEXICO
 - ZF PART NUMBER
 - SERIAL NUMBER (SEE FORMAT BELOW):
 - JULIAN DATE XXXXXXXX-X
 - DAY (3 DIGITS)
 - YEAR (2 DIGITS)
 - CONSECUTIVE NUMBER (4 DIGITS)
 - SEPARATOR (1 DIGIT)
 - TESTER NUMBER (1 DIGIT)
 - 5. PART LABEL TO BE PLACED 1 - 1 1/2" FROM END OF HOUSING.
 - 6. REFER TO PRODUCT SPECIFICATION DOCUMENT NUMBER PSPEC-00005 FOR ADDITIONAL INFORMATION.
 - 7. REED SENSOR: FORM A CONTACT (NORMALLY OPEN)
 - 8. BLACK ANODIZE PER MIL-A-8625, CLASS 2, TYPE 2, BRIGHT FINISH PER CURRENT MIL STD.
 - 9. LEADS: 24 AWG, 7/32 STR, UL1569 PVC.
 - 10. POTTING: EPOXY.
 - 11. TWO (2) HEX NUTS SUPPLIED.
 - 12. PRIMARY DIMENSIONS ARE INCHES.
 - 13. 15/32-32 UNS 2A THREAD SPEC:
 - MAJOR Ø (MAX/MIN) = .4678 / .4618
 - PITCH Ø (MAX/MIN) = .4475 / .4440



DWN: EV		 ZF Electronic Systems			
APVD: GG					
DATE: 12-Mar-01					
THIRD ANGLE PROJECTION		PLEASANT PRAIRIE, WISCONSIN U.S.A.			
		NAME / DESCRIPTION			
		REED SENSOR ASSEMBLY MP200701			
PROJECT/ CSR		TOLERANCE UNLESS SPECIFIED			
DWG UNITS		X.XX	X.XXX	ANGLES	
mm/ INCH		± 0.25/.01	± 0.13/.005	± 2.0 °	
B		ITEM NO.		ES021098	
SCALE:		2:1		SH 1 OF 1	

E	Z000491652	19-Feb-19	CRM	TB
REV	ECO NO.	DATE	PREP	APVD