
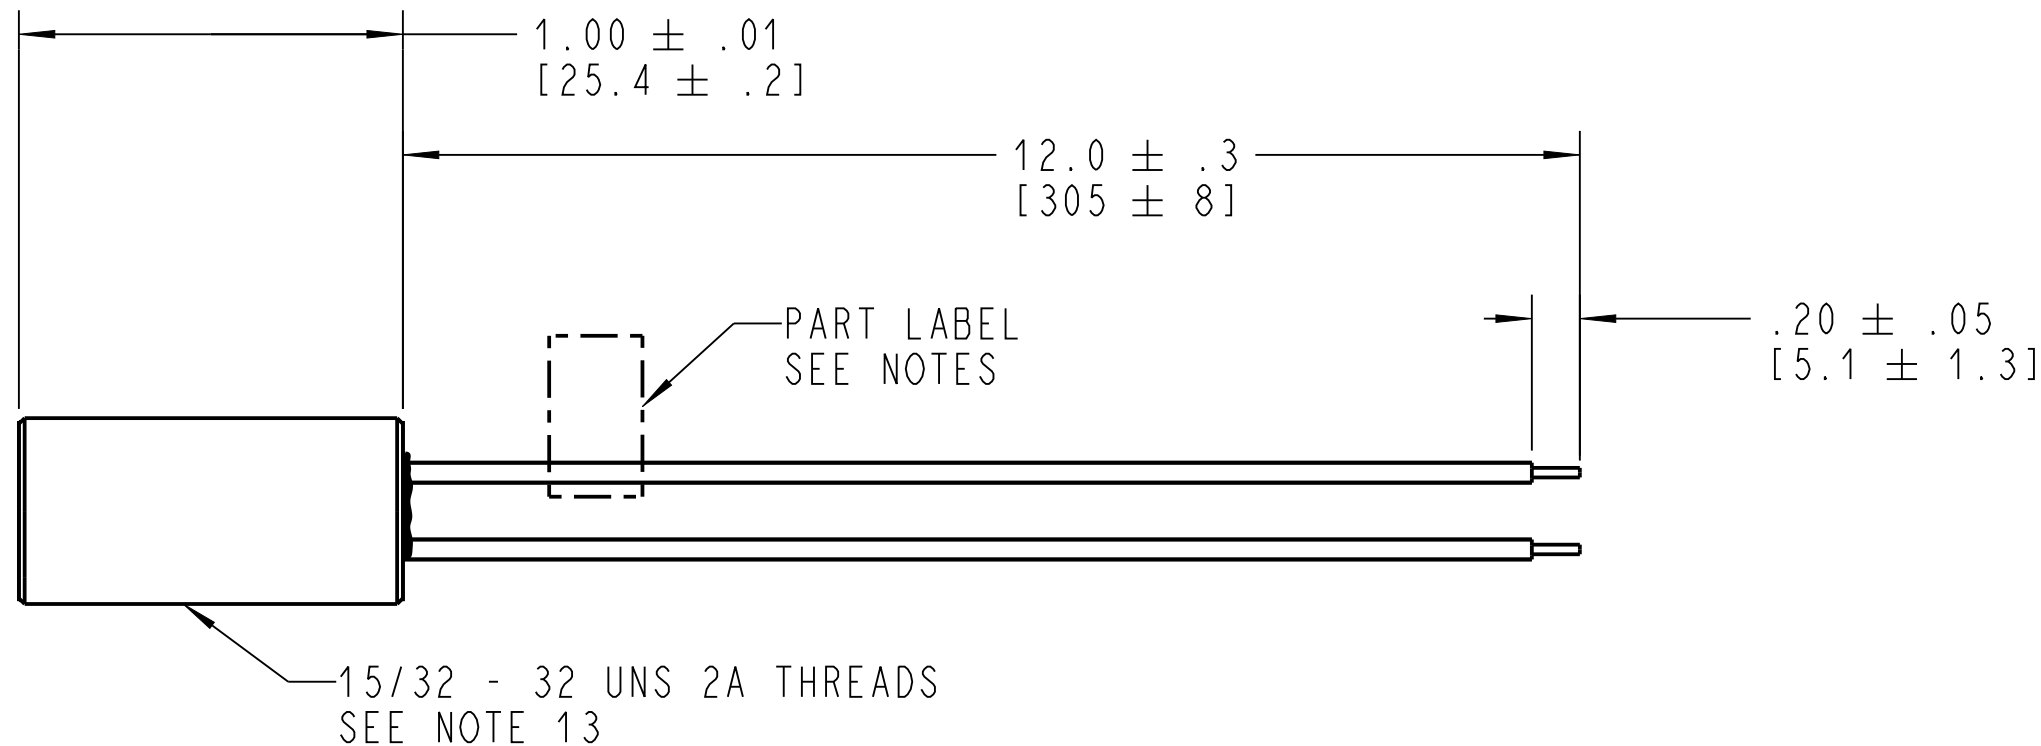




NOTES:

1. ALL SENSORS ARE 100% FUNCTIONAL TESTED.
2. PRODUCT IS ROHS COMPLIANT.
3. OPERATING TEMPERATURE RANGE: -40°C TO 105°C
4. LABEL TO INCLUDE:
MEXICO
ZF PART NUMBER
DATE CODE (YY/WW - A/B SHIFT CODE)
5. PART LABEL TO BE PLACED 1 - 1 1/2" FROM
END OF HOUSING.
6. REFER TO PRODUCT SPECIFICATION DOCUMENT NUMBER
PSPEC-00005 FOR ADDITIONAL INFORMATION.
7. REED SENSOR: FORM B CONTACT (NORMALLY CLOSED)
8. BLACK ANODIZE PER MIL-A-8625, CLASS 2, TYPE 2,
BRIGHT FINISH PER CURRENT MIL STD.
9. LEADS: 24 AWG, 7/32 STR, UL1569 PVC.
10. POTTING: EPOXY.
11. TWO (2) HEX NUTS SUPPLIED.
12. PRIMARY DIMENSIONS ARE INCHES.
13. 15/32 - 32 UNS 2A THREAD SPEC:
MAJOR Ø (MAX/MIN) = .4678 / .4618
PITCH Ø (MAX/MIN) = .4475 / .4440

DWN: EV		 ZF Electronic Systems					
APVD: TB							
DATE: 2025-02-10							
THIRD ANGLE PROJECTION		PLEASANT PRAIRIE, WISCONSIN U.S.A.					
		NAME / DESCRIPTION					
		REED SENSOR ASSEMBLY MP200702					
PROJECT/ CSR		B ITEM NO. ES021099					
REV		ECO NO.		SCALE: 2:1		SH 1 OF 1	
F		Z000767072		DATE		TCH TB	
REV		ECO NO.		DATE		TCH TB	
F		Z000767072		DATE		TCH TB	
REV		ECO NO.		DATE		TCH TB	

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.01	± 0.005	± 2.0 °