


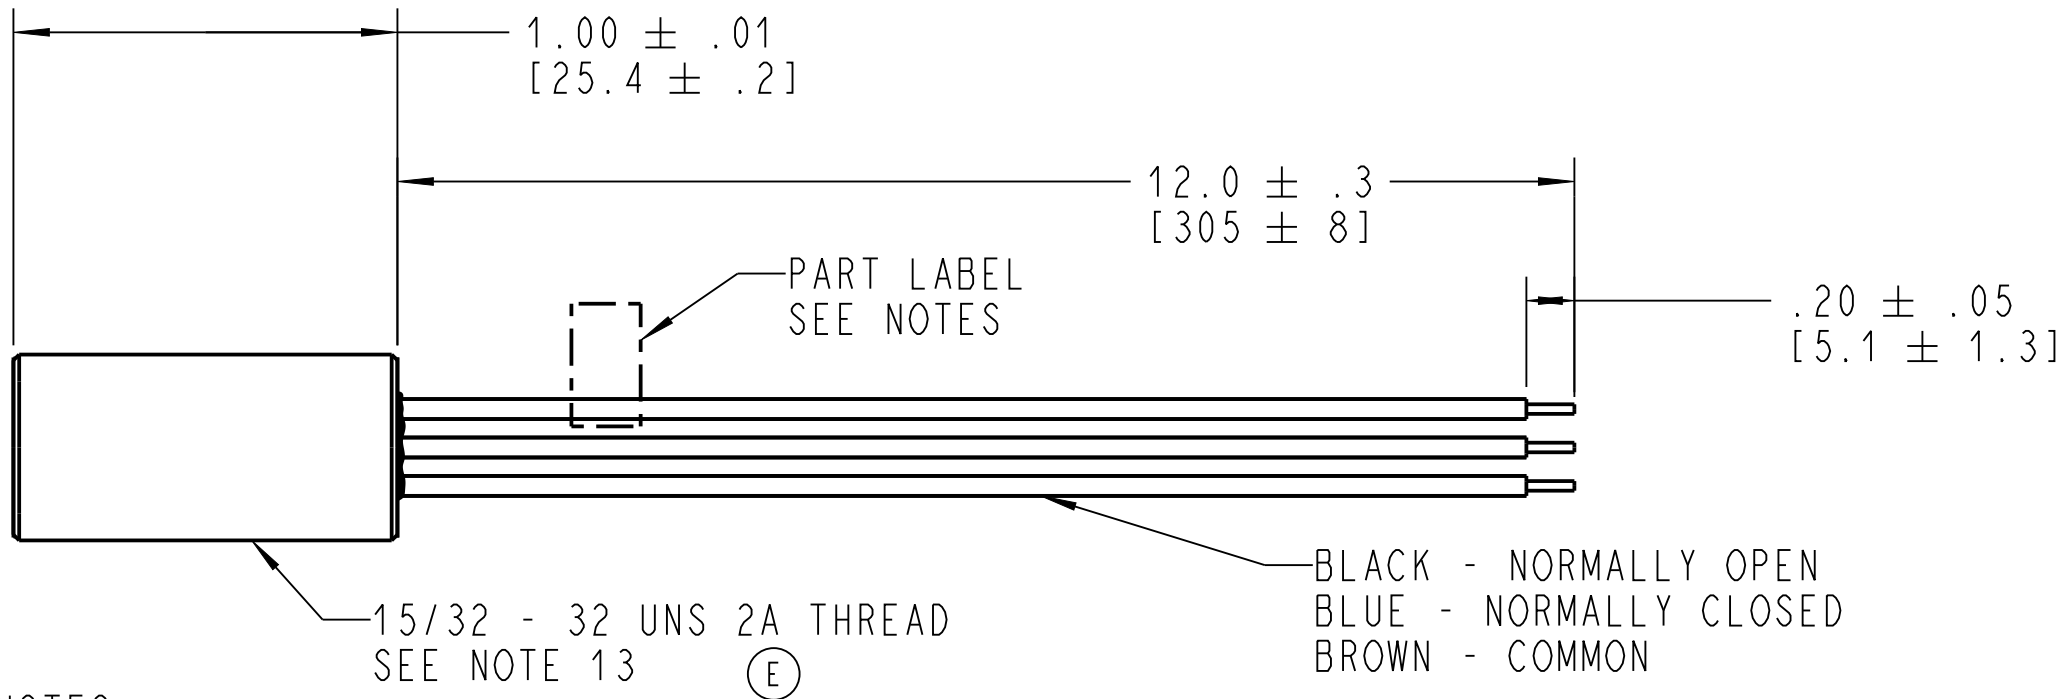

NOTES:

1. ALL SENSORS ARE 100% FUNCTIONAL TESTED.
2. PRODUCT IS ROHS COMPLIANT.
3. OPERATING TEMPERATURE RANGE: -40°C TO 105°C
4. LABEL TO INCLUDE:
MEXICO
ZF PART NUMBER
DATE CODE (YY/WW - A/B SHIFT CODE)
5. REFER TO PRODUCT SPECIFICATION DOCUMENT
NUMBER PSPEC-00005 FOR ADDITIONAL INFORMATION.
6. PART LABEL TO BE PLACED 1- 1.5" FROM END OF HOUSING.
7. REED SENSOR
FORM "C" CONTACT
(SINGLE POLE DOUBLE THROW)
8. BLACK ANODIZE PER MIL-A-8625, CLASS 2, TYPE 2,
BRIGHT FINISH PER CURRENT MIL STD.
9. LEADS: 24 AWG, 7/32 STR, UL1569 PVC.
10. POTTING: EPOXY.
11. 2 HEX NUTS SUPPLIED.
12. PRIMARY DIMENSION UNITS ARE INCHES.
13. MAJOR DIA. (MAX./MIN.) .4678/.4618
PITCH DIA. (MAX./MIN.) .4475/.4440

(E)

DWN: EV
APVD: GG
DATE: 2016-09-23
THIRD ANGLE PROJECTION
PROJECT/ CSR
N/A

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.01	± 0.005	± 2.0 °

 ZF Electronic Systems	
PLEASANT PRAIRIE, WISCONSIN U.S.A.	
NAME / DESCRIPTION	
MP200703 REED SENSOR ASSEMBLY	
B	ITEM NO. ES021100
SCALE:	2:1 SH 1 OF 1