
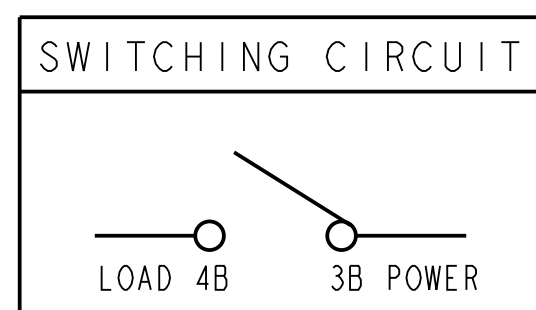


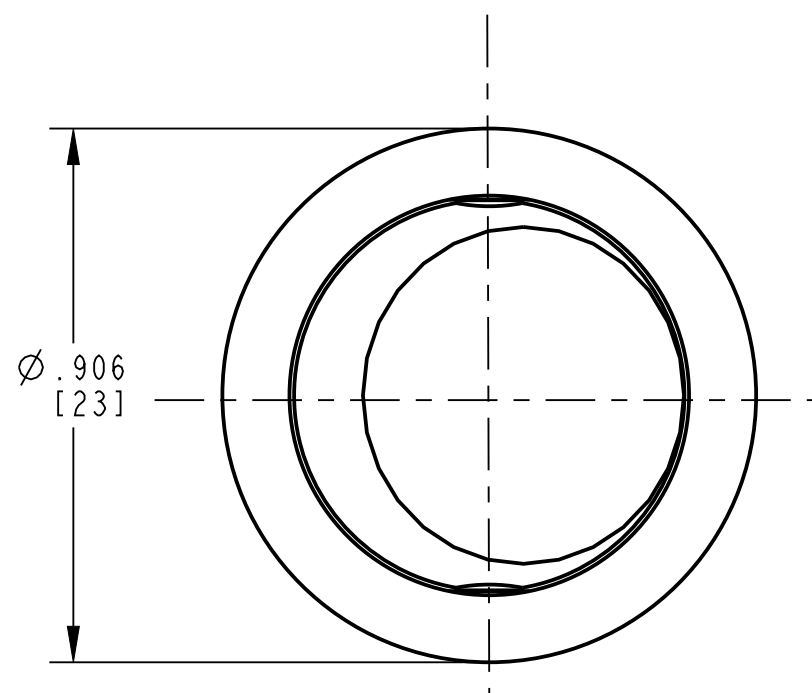

NOTES (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON ROCKER:

10A 125VAC
8A 250VAC
1/4HP 125/250VAC

G 10(4)A 250V~T125/55 10E3




c 12(4)A 125/250V~

INITIAL CONTACT RESISTANCE: 20m Ω (MAX.)

INSULATION RESISTANCE: 100M Ω MIN. AT 500VDC


DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE

TERMINALS (2): .187 (4.7) X .031(0.8).

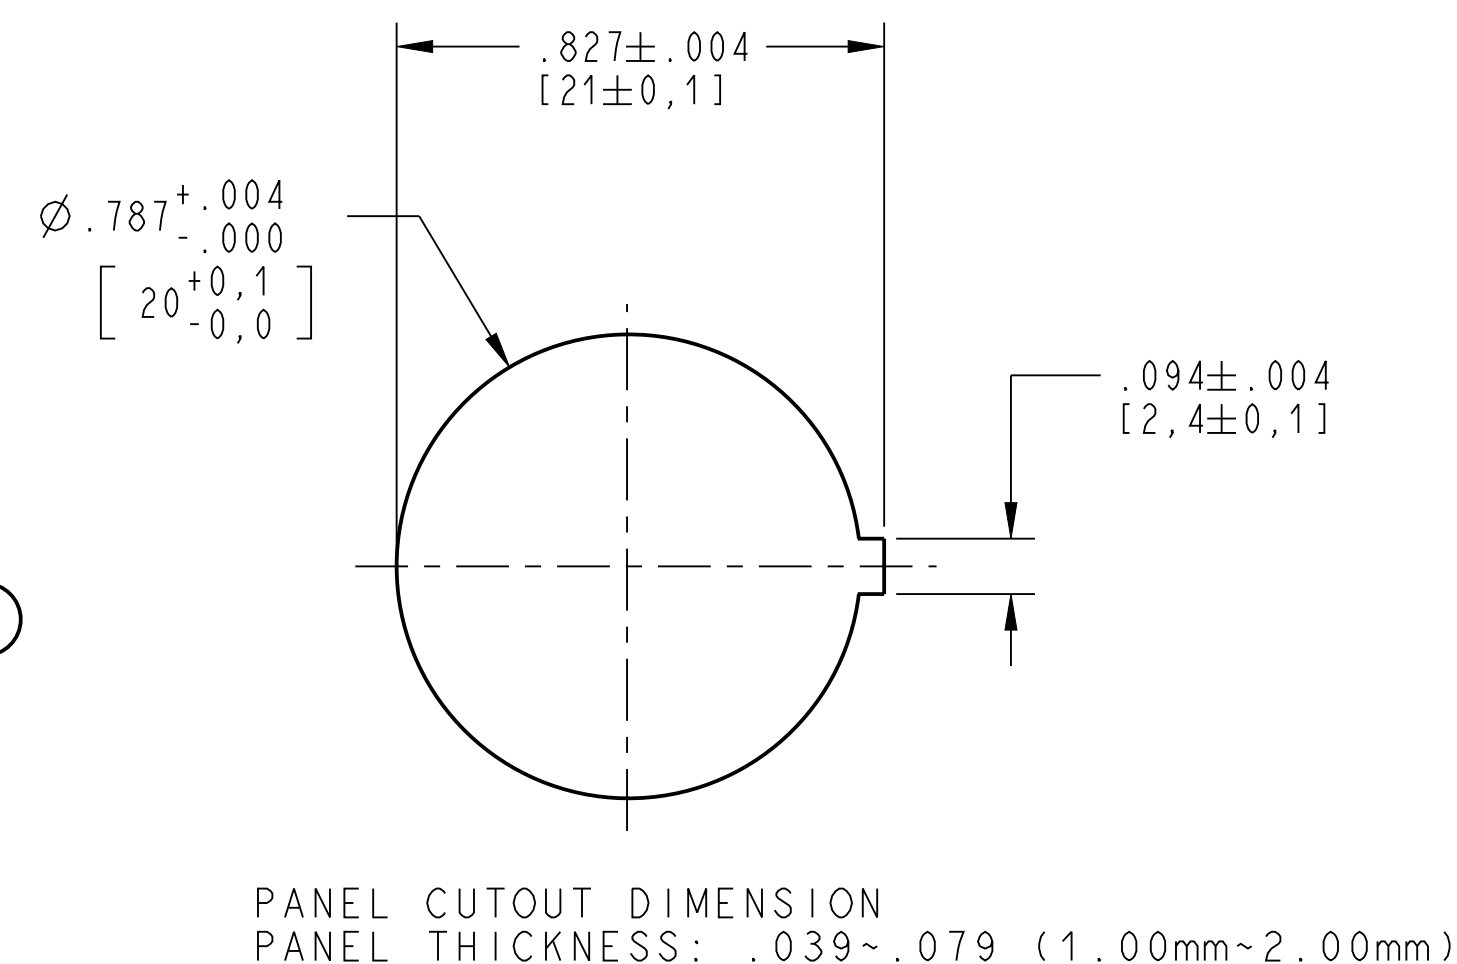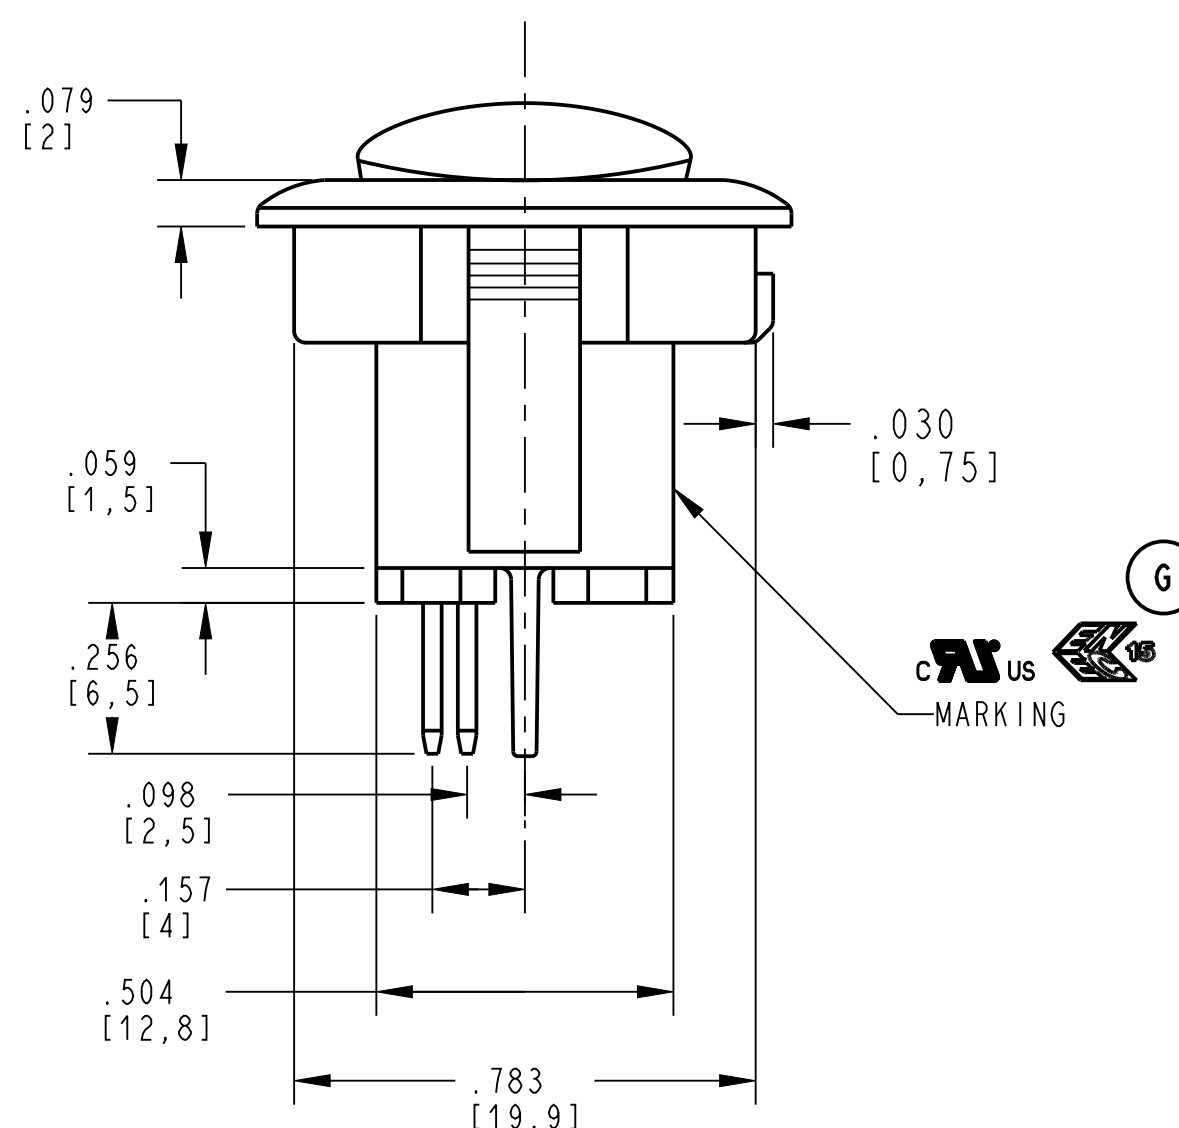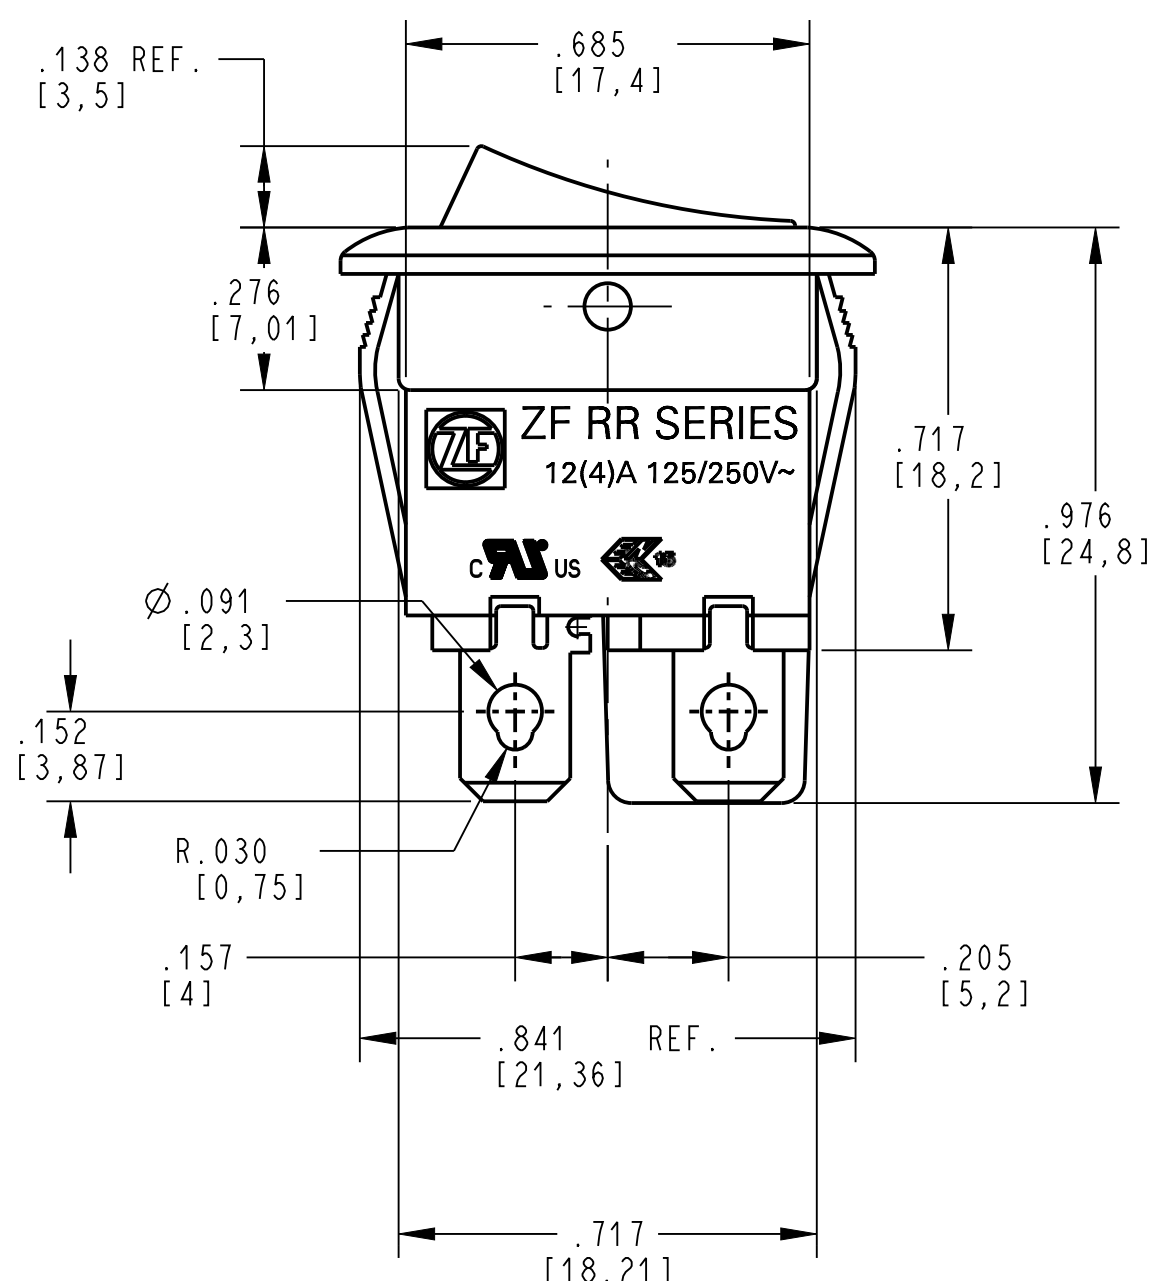

DWN: TLM
APVD: SB
DATE: 03-JUL-03

THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC. DRAWING

G	Z000689143	5-9-2023	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
4000000138	INCH	± 0.02	± 0.012	± 5 °

C	ITEM NO.	RRA22H3BBBNN
SCALE:	3:1	SH 1 OF 1