

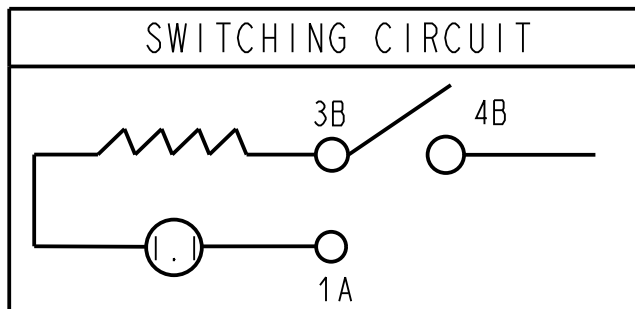
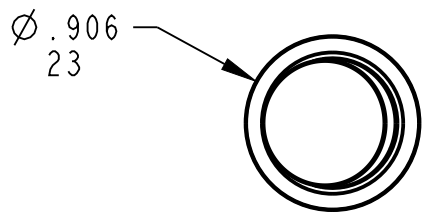
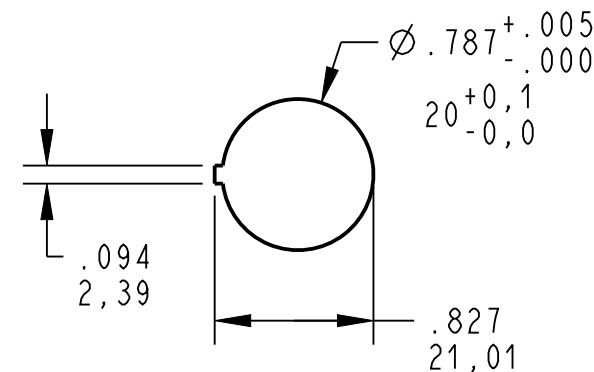


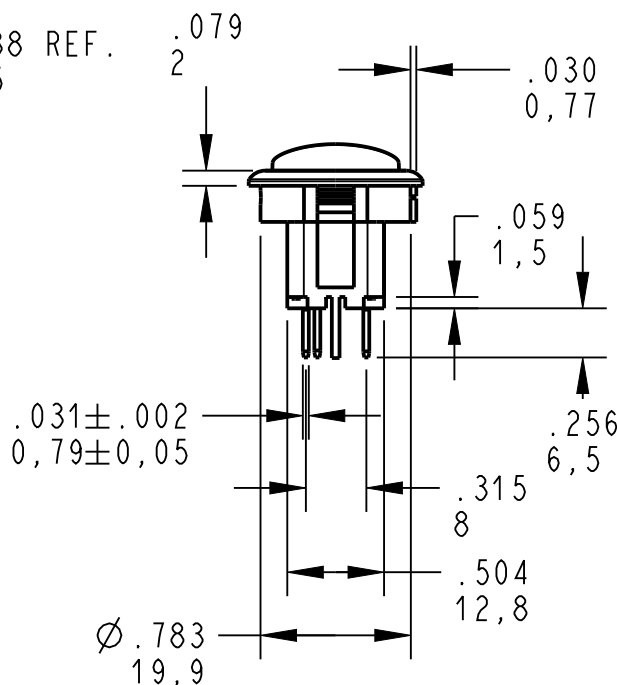


ROCKER SWITCH MODEL RR SERIES
 RATING: 12A 125VAC, 10A 250VAC (CSA)
 10A 125VAC, 8A 250VAC (UL)
 10(4)A 250V-T125/55 (VDE)
 DIELECTRIC WITHSTAND VOLTAGE: 1000VAC 1 MINUTE
 INSULATION RESISTANCE: 100MΩ (MIN.)
 CONTACT RESISTANCE: 20mΩ (MIN.)

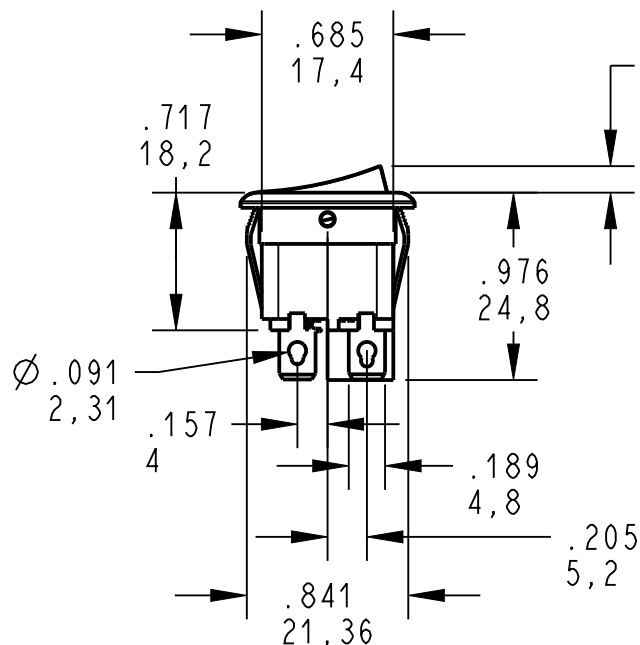

PANEL THICKNESS: 1.0-2.0mm

DWN: R. YANEZ
 APVD: T. STORM
 DATE: 19-JAN-10
 THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

RR SPEC DRAWING

		19-Jan-10	RY	TS
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR
 100009

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.010	± 1.0 °

A	ITEM NO. RRA22H3BBRLN
SCALE:	1:1 SH 1 OF 1

ORIGINAL ON PRO/E