
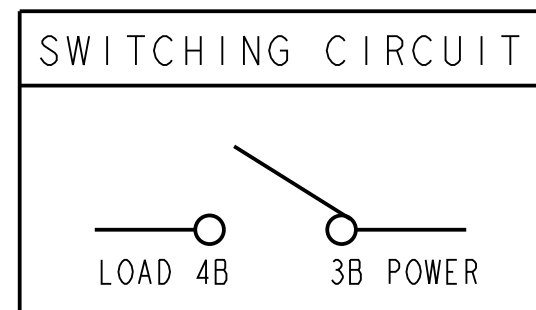


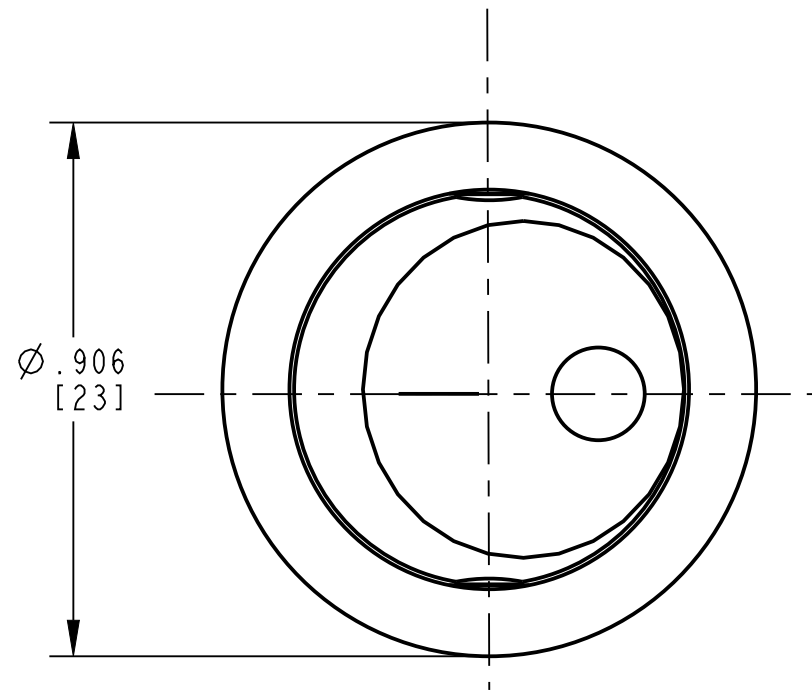

NOTES (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON ROCKER:

10A 125VAC
8A 250VAC
1/4HP 125/250VAC

(B) 10(4)A 250V~T125/55 10E3




12(4)A 125/250V~

INITIAL CONTACT RESISTANCE: 20m Ω (MAX.)

INSULATION RESISTANCE: 100M Ω MIN. AT 500VDC


DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE

TERMINALS (2): .185+.004/- .002[4,7+0,1/-0,05]X .031±.001[0,8±0,03].

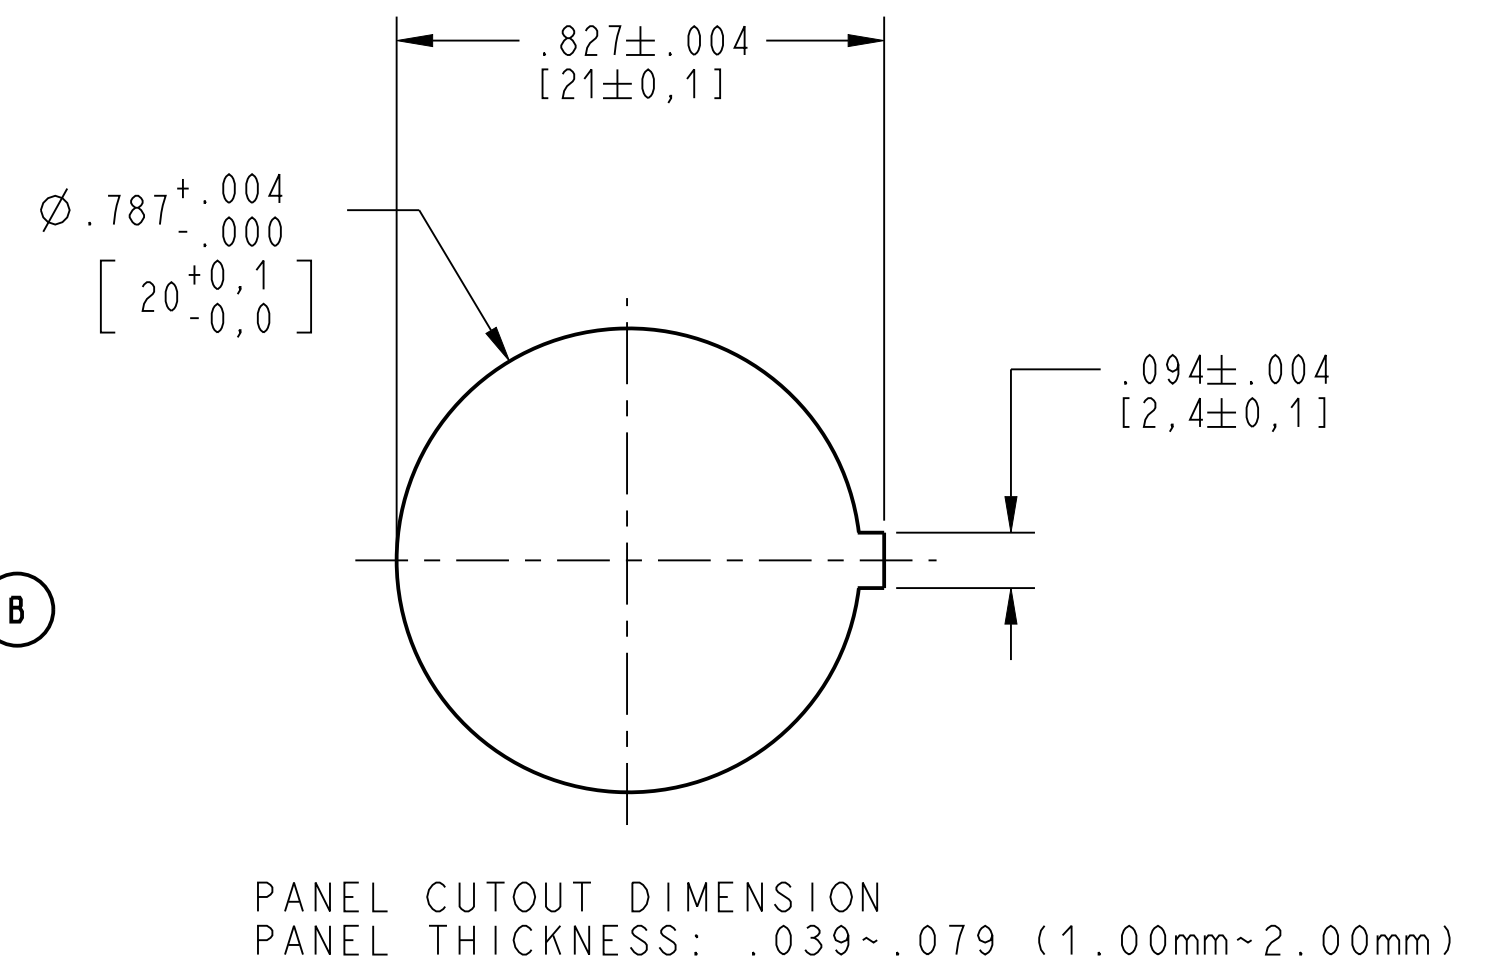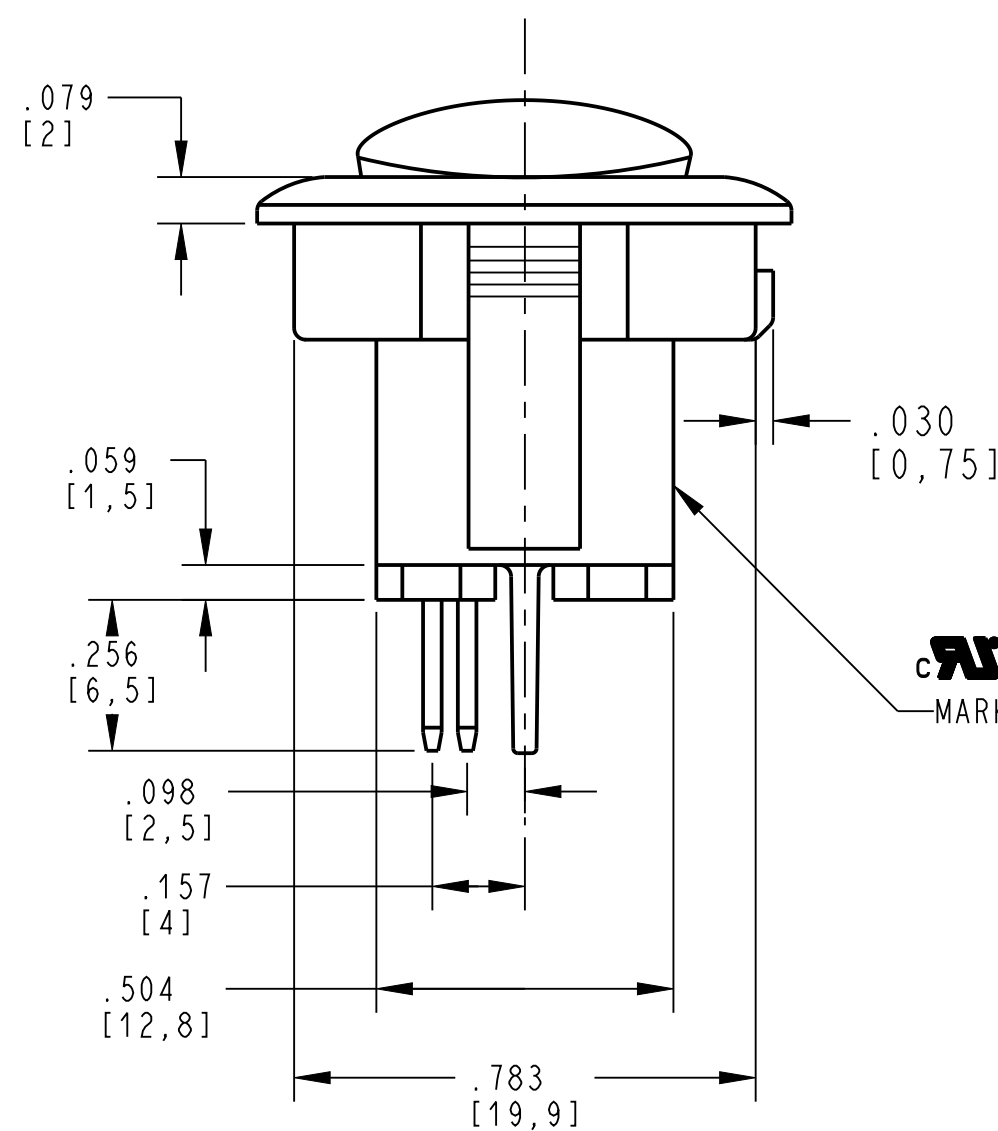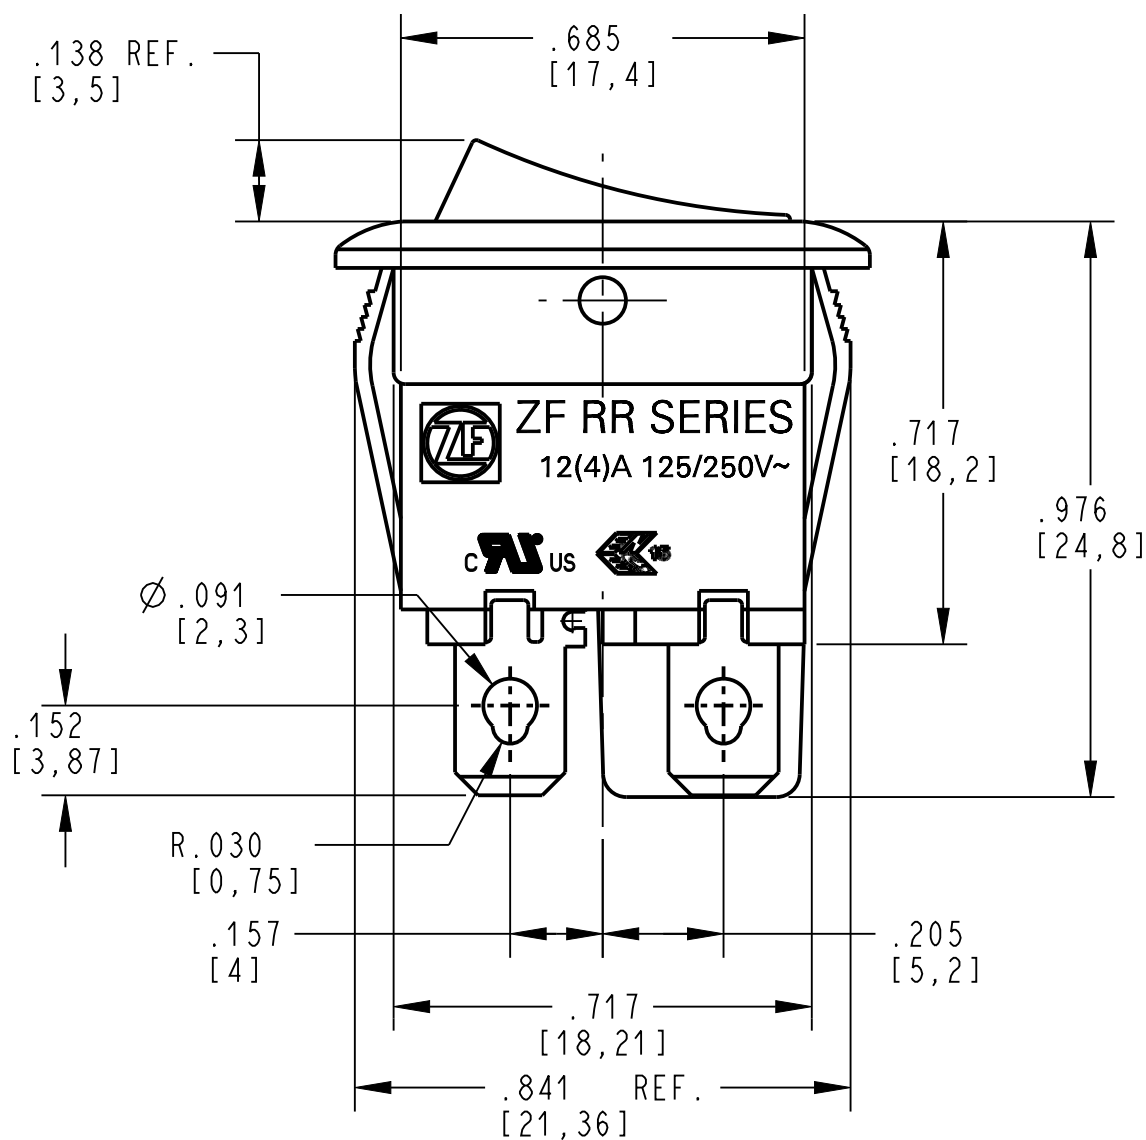

DWN: JPD
APVD: ELL
DATE: 01-Dec-17

THIRD ANGLE PROJECTION



PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC. DRAWING

ITEM NO. RRA22H3FBRNN

SCALE: 3.000 SH 1 OF 1

REV	ECO NO.	DATE	PREP	APVD
B	Z000689143	5-9-2023	TCH	ELL

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
N/A	INCHES	± 0.02	± 0.012	± 5.0 °